

TIL124, TIL125, TIL126 OPTOCOUPLED


SO05044 D2227, MAY 1977—REVISED DECEMBER 1982

COMPATIBLE WITH STANDARD TTL INTEGRATED CIRCUITS

- Gallium Arsenide Diode Infrared Source Optically Coupled to a Silicon N-P-N Phototransistor
- High Direct-Current Transfer Ratio
- High-Voltage Electrical Isolation . . . 5000-V Rating
- Plastic Dual-In-Line Package
- High-Speed Switching: $t_r = 2 \mu s$, $t_f = 2 \mu s$ Typical
- Typical Applications Include Remote Terminal Isolation, SCR and Triac Triggers, Mechanical Relays, and Pulse Transformers

mechanical data

The package consists of a gallium arsenide infrared-emitting diode and an n-p-n silicon phototransistor mounted on a 6-lead frame encapsulated within an electrically nonconductive plastic compound. The case will withstand soldering temperature with no deformation and device performance characteristics remain stable when operated in high-humidity conditions. Unit weight is approximately 0.52 grams.

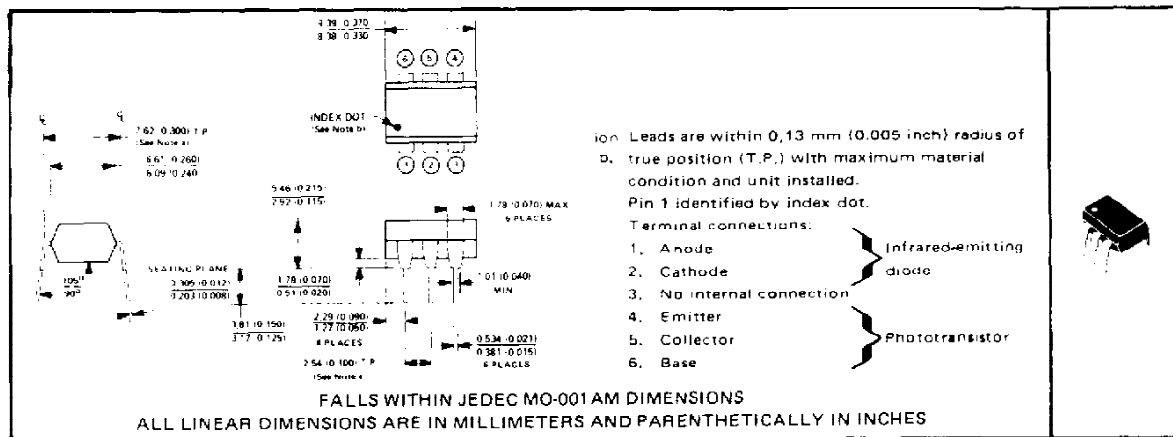

absolute maximum ratings at 25°C free-air temperature (unless otherwise noted)

Input-to-Output Voltage	±5 kV
Collector-Base Voltage	70 V
Collector-Emitter Voltage (See Note 1)	30 V
Emitter-Collector Voltage	7 V
Emitter-Base Voltage	7 V
Input-Diode Reverse Voltage	3 V
Input-Diode Continuous Forward Current	100 mA
Continuous Power Dissipation at (or below) 25°C Free-Air Temperature:	
Infrared-Emitting Diode (See Note 2)	150 mW
Phototransistor (See Note 3)	150 mW
Total, Infrared-Emitting Diode plus Phototransistor (See Note 4)	250 mW
Storage Temperature Range	-55°C to 150°C
Lead Temperature 1.6 mm (1/16 inch) from Case for 10 Seconds	260°C

- NOTES
1. This value applies when the base-emitter diode is open-circuited.
 2. Derate linearly to 100°C free-air temperature at the rate of 2 mW/°C.
 3. Derate linearly to 100°C free-air temperature at the rate of 2 mW/°C.
 4. Derate linearly to 100°C free-air temperature at the rate of 3.33 mW/°C.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1983, Texas Instruments Incorporated

TEXAS
INSTRUMENTS

POST OFFICE BOX 555303 • DALLAS, TEXAS 75265

TIL124, TIL125, TIL126 OPTOCOUPERS

electrical characteristics at 25°C free-air temperature

PARAMETER	TEST CONDITIONS	TIL124			TIL125			TIL126			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
$V_{(BR)IC80}$ Collector-Base Breakdown Voltage	$I_C = 10 \mu A, I_E = 0, I_F = 0$	70			70			70			V
$V_{(BR)CEO}$ Collector-Emitter Breakdown Voltage	$I_C = 1 mA, I_B = 0, I_F = 0$	30			30			30			V
$V_{(BR)EBO}$ Emitter-Base Breakdown Voltage	$I_E = 10 \mu A, I_C = 0, I_F = 0$	7			7			7			V
I_R Input Diode Static Reverse Current	$V_R = 3 V$	10			10			10			μA
$I_{C(on)}$ On-State Collector Current	Phototransistor Operation $V_{CE} = 10 V, I_F = 10 mA, I_B = 0$	1	3		2	5		5	9		mA
	Photodiode Operation $V_{CB} = 10 V, I_F = 10 mA, I_E = 0$	5	20		5	20		5	20		μA
$I_{C(off)}$ Off-State Collector Current	Phototransistor Operation $V_{CE} = 10 V, I_F = 0, I_B = 0$		1	50		1	50		1	50	nA
	Photodiode Operation $V_{CB} = 10 V, I_F = 0, I_E = 0$		0.1	20		0.1	20		0.1	20	nA
h_{FE} Transistor Static Forward Current Transfer Ratio	$V_{CE} = 5 V, I_C = 10 mA, I_F = 0$	50	100		100	200		100	550		
V_F Input Diode Static Forward Voltage	$I_F = 10 mA$		1.2	1.4		1.2	1.4		1.2	1.4	V
$V_{CE(sat)}$ Collector-Emitter Saturation Voltage	$I_C = 1 mA, I_F = 10 mA, I_B = 0$		0.25	0.4		0.25	0.4		0.25	0.4	V
r_{io} Input-to-Output Internal Resistance	$V_{in-out} = 500 V, \text{See Note 5}$	10^{11}			10^{11}			10^{11}			Ω
C_{io} Input-to-Output Capacitance	$V_{in-out} = 0, f = 1 MHz, \text{See Note 5}$		1	1.3		1	1.3		1	1.3	pF

NOTE 5: These parameters are measured between both input diode leads shorted together and all the phototransistor leads shorted together.


switching characteristics at 25°C free-air temperature

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_r	Rise Time		Phototransistor Operation $V_{CC} = 10 V, I_{C(on)} = 2 mA, R_L = 100 \Omega, \text{See Test Circuit A of Figure 1}$		5	
t_f	Fall Time			5	10	
t_r	Rise Time	Photodiode Operation $V_{CC} = 10 V, I_{C(on)} = 20 \mu A, R_L = 1 k\Omega, \text{See Test Circuit B of Figure 1}$		1		μs
t_f	Fall Time			1		


TIL124, TIL125, TIL126 OPTOCOUPLED

PARAMETER MEASUREMENT INFORMATION


Adjust amplitude of input pulse for:
 $I_{C(on)} = 2 \text{ mA}$ (Test Circuit A) or
 $I_{C(on)} = 20 \mu\text{A}$ (Test Circuit B)

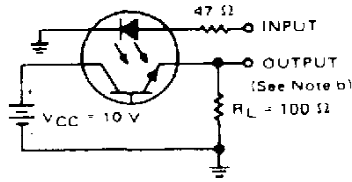

TEST CIRCUIT A
PHOTOTRANSISTOR OPERATION

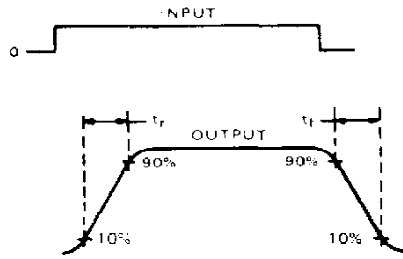

VOLTAGE WAVEFORMS

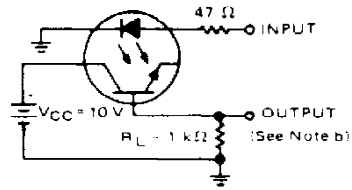


TEST CIRCUIT B
PHOTODIODE OPERATION


NOTES: 1. The input waveform is supplied by a generator with the following characteristics: $f = 50 \text{ kHz}$, $t_r = 15 \text{ ns}$, duty cycle $\geq 1\%$.

PARAMETER MEASUREMENT INFORMATION


Adjust amplitude of input pulse for:
 $I_{C(on)} = 2 \text{ mA}$ (Test Circuit A) or
 $I_{C(on)} = 20 \mu\text{A}$ (Test Circuit B)




TEST CIRCUIT A
PHOTOTRANSISTOR OPERATION

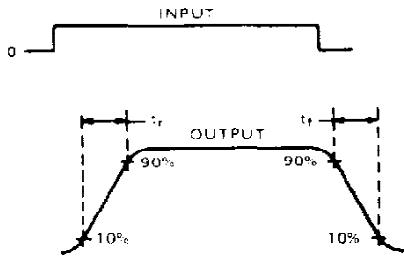

VOLTAGE WAVEFORMS



TEST CIRCUIT B
PHOTODIODE OPERATION



TEST CIRCUIT C
PHOTOTRANSISTOR OPERATION

NOTES: 1. The input waveform is supplied by a generator with the following characteristics: $f = 50 \text{ kHz}$, $t_r = 15 \text{ ns}$, duty cycle $\geq 1\%$.


NOTES: 1. The input waveform is supplied by a generator with the following characteristics: $f = 50 \text{ kHz}$, $t_r = 15 \text{ ns}$, duty cycle $\geq 1\%$.

PARAMETER MEASUREMENT INFORMATION


PARAMETER MEASUREMENT INFORMATION

Adjust amplitude of input pulse for:
 $I_{C(on)} = 2 \text{ mA}$ (Test Circuit A) or
 $I_{C(on)} = 20 \mu\text{A}$ (Test Circuit B)


Adjust amplitude of input pulse for:
 $I_{C(on)} = 2 \text{ mA}$ (Test Circuit A) or
 $I_{C(on)} = 20 \mu\text{A}$ (Test Circuit B)




VOLTAGE WAVEFORMS



TEST CIRCUIT B
PHOTODIODE OPERATION

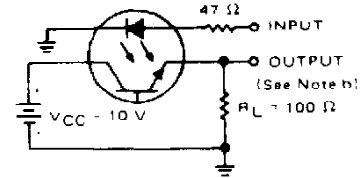

TEST CIRCUIT A
PHOTOTRANSISTOR OPERATION







NOTES: 1. The input waveform is supplied by a generator with the following characteristics: $f = 50 \text{ kHz}$, $t_r = 15 \text{ ns}$, duty cycle $\geq 1\%$.

NOTES: 1. The input waveform is supplied by a generator with the following characteristics: $f = 50 \text{ kHz}$, $t_r = 15 \text{ ns}$, duty cycle $\geq 1\%$.

**TIL124, TIL125, TIL126
OPTOCOUPERS**

TYPICAL CHARACTERISTICS

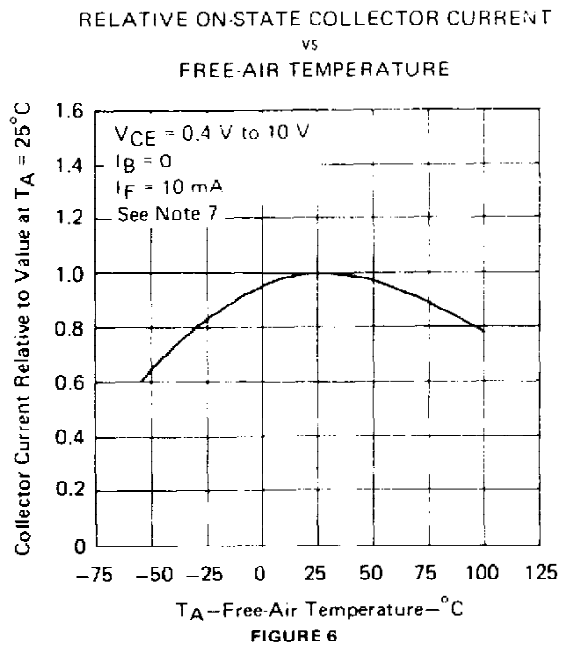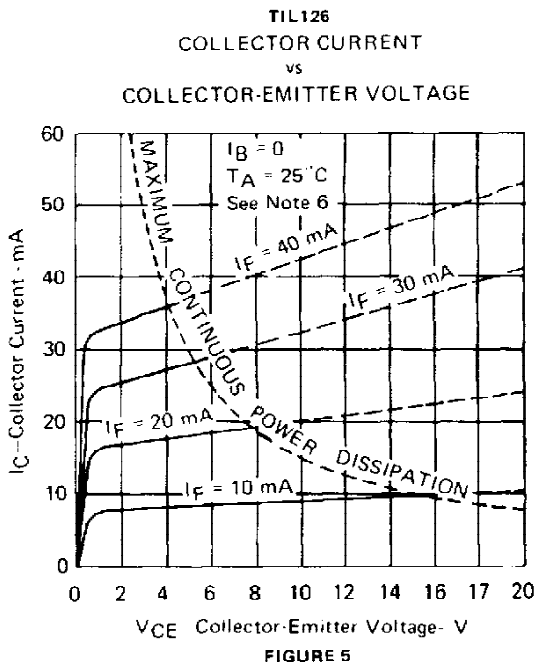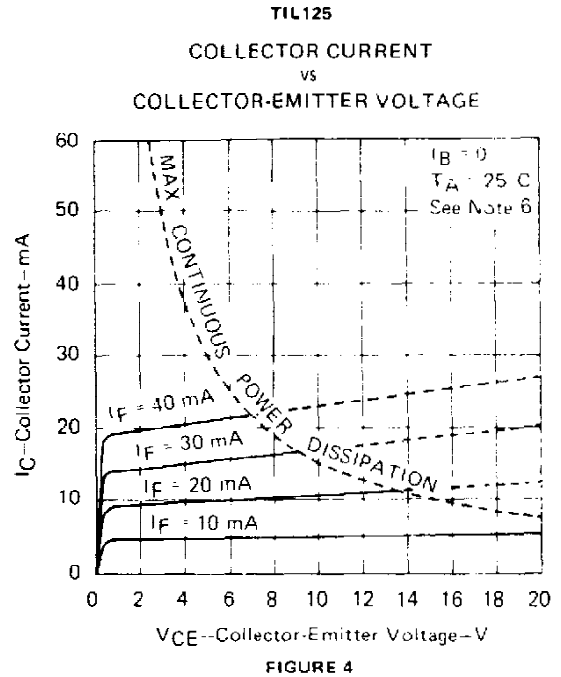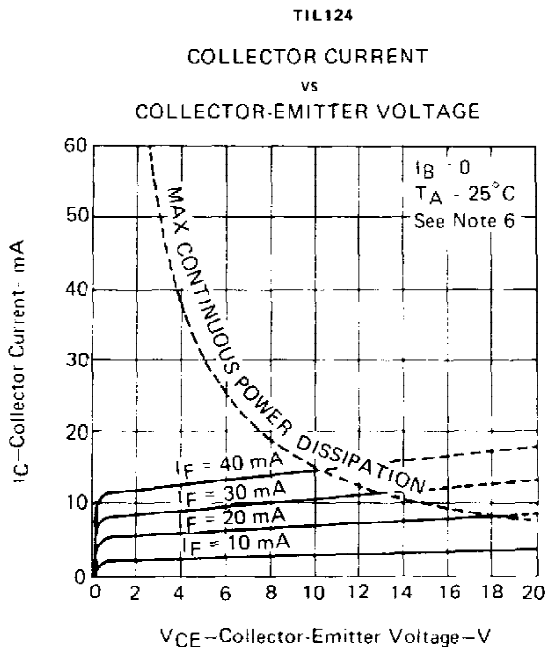

NOTES 6. Pulse operation of input diode is required for operation beyond limits shown by dotted lines.
7. These parameters were measured using pulse techniques. $t_w = 1$ ms, duty cycle $\leq 2\%$.

TYPICAL CHARACTERISTICS

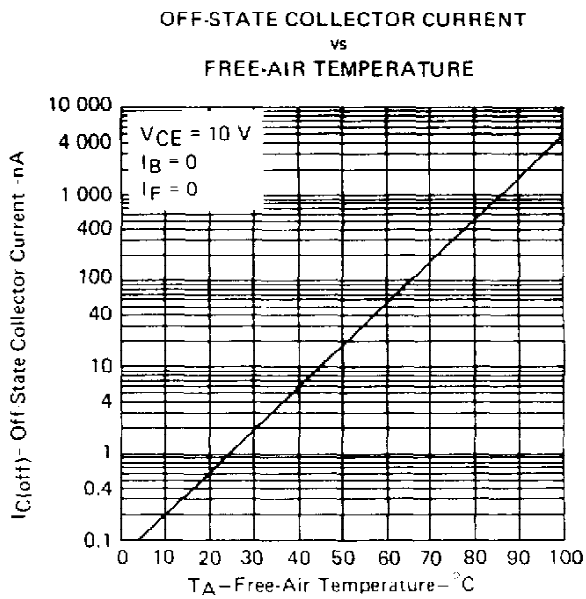


FIGURE 7

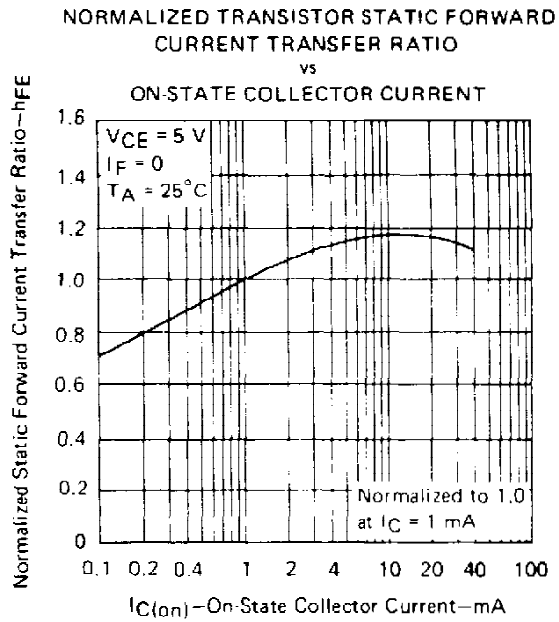


FIGURE 8

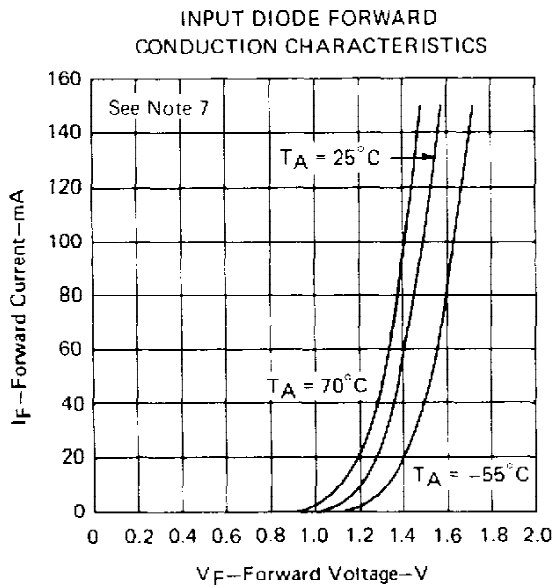


FIGURE 9

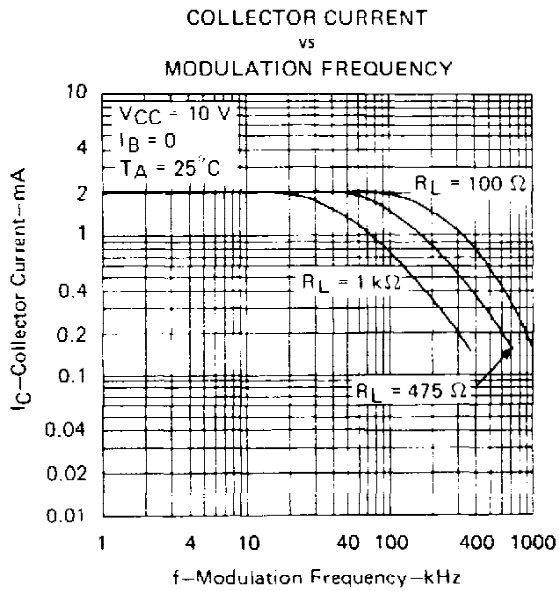


FIGURE 10

NOTE 7: These parameters were measured using pulse techniques. $t_w = 1\text{ ms}$, duty cycle $\leq 2\%$.

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, license, warranty or endorsement thereof.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations and notices. Representation or reproduction of this information with alteration voids all warranties provided for an associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Resale of TI's products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Also see: [Standard Terms and Conditions of Sale for Semiconductor Products](http://www.ti.com/sc/docs/stdterms.htm). www.ti.com/sc/docs/stdterms.htm

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265