

M62384FP

8-Bit, 4-Channel, 3 to 5 V D-A Converter (Buffered)

REJ03F0077-0200

Rev.2.00

Mar 25, 2008

Description

The M62384 is a CMOS-structure semiconductor integrated circuit incorporating four 8-bit D-A converter channels with output buffer op-amps.

Serial data transfer type input can easily be used through a combination of three lines: DI, CLK, and LD. Outputs incorporate buffer op-amps that have a drive capacity of 1 mA or above for both sink and source, and can operate over the entire voltage range from almost ground to VCC (0 to 5 V), making peripheral elements unnecessary and enabling configuration of a system with few component parts.

Support of power supply voltages of 3 V to 5 V enables the M62384 to be used in a wide range of applications.


Features

- 12-bit serial data input (3-line type: SDI, SCK, SLD)
- Serial data transfer clock frequency: 10 MHz (max.)
- Output buffer op-amps
Operable over entire voltage range from almost ground to VCC
- Power-on reset and external reset functions
- Chip select function
Up to 4 chips connectable on the same bus
- Supported power supply voltage: 3 V to 5 V (2.7 V to 5.5 V)

Application


Signal gain setting and automatic adjustment in CTV and display monitors, conversion from digital data to analog data in consumer and industrial products

Pin Connection Diagram

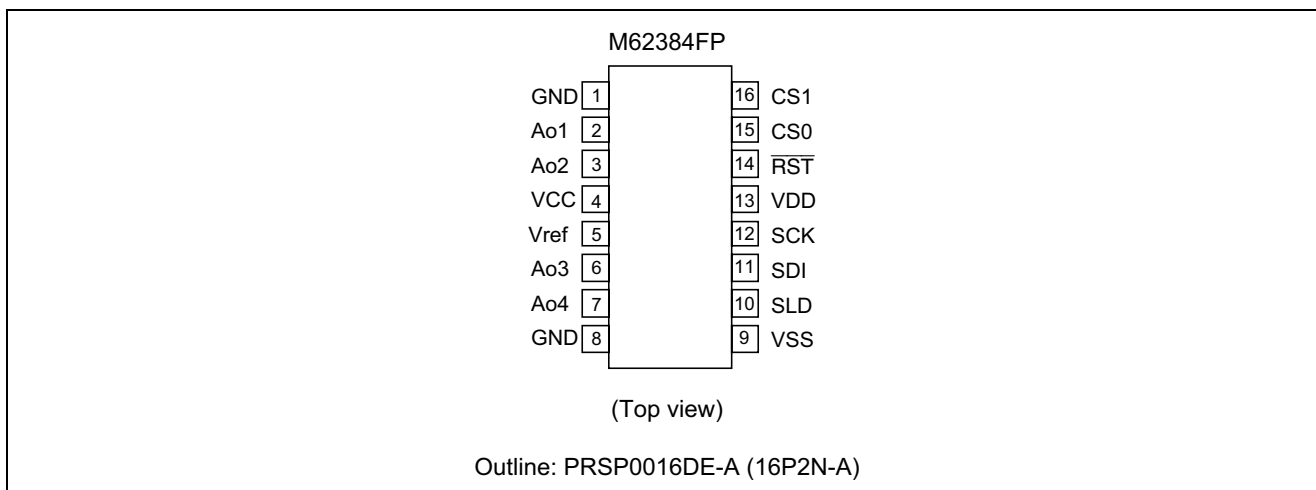

This product is currently under development, and specifications and other details may be modified at a future date.

Block Diagram

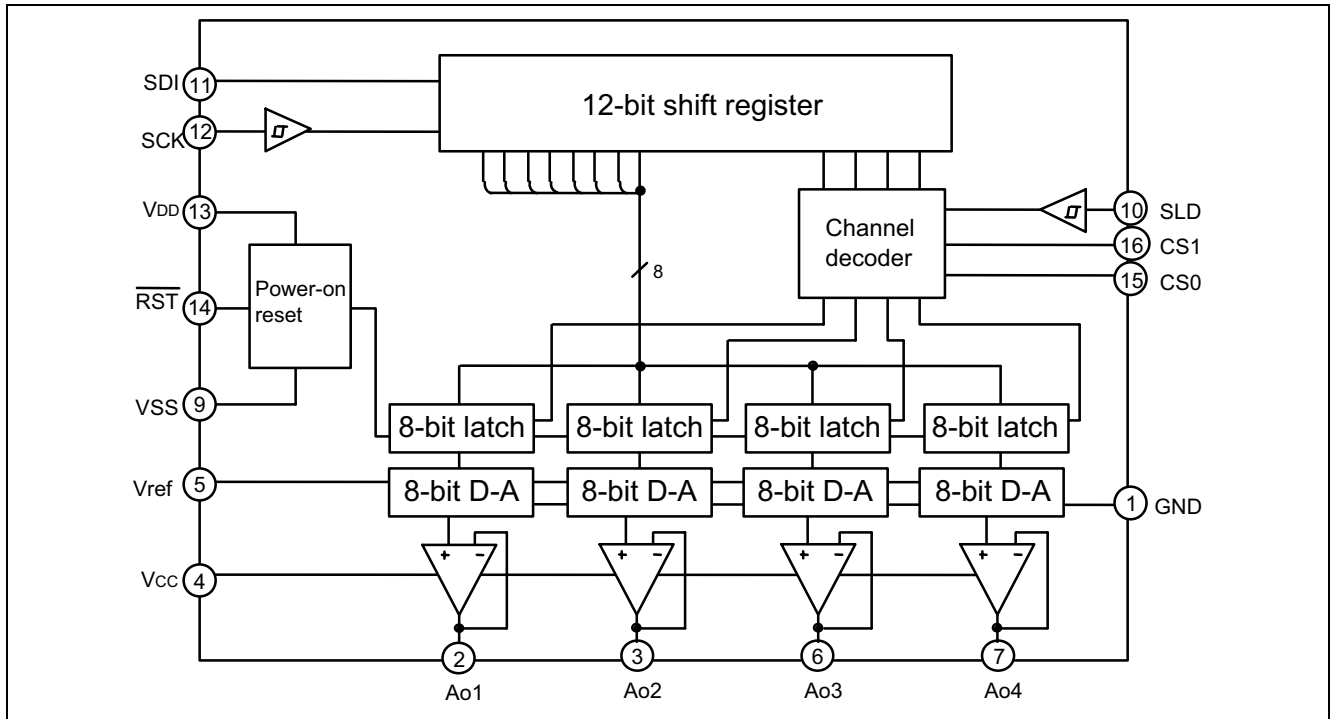

Pin Functions

Pin No.	Symbol	Function
1, 8	GND	Analog GND: analog circuit GND (D-A converter lower reference voltage)
2	Ao1	D-A converter output pins (ch1 to ch4): full-swing buffer output
3	Ao2	Output voltage: Ao (00)h = 0V, Ao (FF)h = 255/256 × VREF
6	Ao3	
7	Ao4	
4	Vcc	Analog power supply (3 V to 5 V) Must rise simultaneously with VDD or after VDD rise.
5	Vref	D-A converter upper reference voltage input pin
9	Vss	Digital GND
10	SLD	Serial load signal input pin (Schmitt trigger input: with input hysteresis) When SLD is high, data is loaded from shift register into 8-bit latch corresponding to address.
11	SDI	Serial data input pin (TTL input in case of 5 V power supply) Inputs serial data with a 12-bit data length (MSB-first).
12	SCK	Serial clock signal input pin (Schmitt trigger input: with input hysteresis) At rising edge, data is read into shift register one bit at a time.
13	VDD	Digital power supply pin (3 V to 5 V) When power supply rises, D-A output is reset (0 V output: power-on reset).
14	RST	Forced reset pin (TTL input in case of 5 V power supply) L: D-A output (AO1 to 4) = Fixed setting of 0 V H: Reset release (power-on reset operation)
15	CS0	Chip select pins (TTL input in case of 5 V power supply)
16	CS1	Access possible only when chip select data (D11, D10) and pin (CS1, CS0) logic match.

Absolute Maximum Ratings

(Unless specified otherwise, $T_a = 25^\circ\text{C}$)


Item	Symbol	Rated Value	Unit	Conditions
Power supply voltage	VCC,VDD	-0.3 to 7.0	V	
Digital input voltage	VDIN	-0.3 to $V_{CC}+0.3$ (≤ 7.0)	V	DC voltage ("H" level)
Reference voltage input voltage	Vref	-0.3 to $V_{CC}+0.3$ (≤ 7.0)	V	
D-A output voltage	VAO	-0.3 to $V_{CC}+0.3$ (≤ 7.0)	V	
Permissible loss	Pd	300	mW	
Operating ambient temperature	Topr	-20 to +75	$^\circ\text{C}$	
Storage temperature	Tstg	-40 to +125	$^\circ\text{C}$	

Recommended Operating Conditions

(Unless specified otherwise, $V_{CC} = V_{DD} = 5\text{ V} \pm 10\%$, $V_{ref} = 2\text{ V}$ to V_{CC} , $V_{SS} = \text{GND} = 0\text{ V}$, $f_{sck} = 5\text{ MHz}$, $VDINH = V_{DD}$, $VDINL = V_{SS}$, $T_a = 20^\circ\text{C}$ to 75°C)

Item	Symbol	Specification Values			Unit	Test Conditions
		Min.	Typ.	Max.		
Analog power supply voltage	VCC	2.7		5.5	V	$V_{CC} = V_{DD}$
Digital power supply voltage	VDD	2.7		5.5	V	$V_{CC} = V_{DD}$
Reference voltage	Vref	2.0		5.5	V	$V_{ref} \leq V_{CC}$
Serial clock frequency	f_{sck}			10	MHz	
"H" level digital input voltage	VDINH	0.5VDD		VDD	V	
"L" level digital input voltage	VDINL	VSS		0.2VDD	V	
Clock "H" pulse width	t_{sckH}	30			ns	$V_{CC} = V_{DD} \geq 2.7\text{V}$
Clock "L" pulse width	t_{sckL}	30			ns	$V_{CC} = V_{DD} \geq 2.7\text{V}$
Clock rise time	t_{sckR}			200	ns	
Clock fall time	t_{sckF}			200	ns	
Data setup time	t_{DCH}	10			ns	
Data hold time	t_{CHD}	20			ns	
Load setup time	t_{CHL}	40			ns	
Load hold time	t_{LDC}	20			ns	
Load "H" pulse width	t_{LDH}	20			ns	
Reset "L" pulse width	t_{RSTL}	50			ns	
Load setup time after reset release	t_{RCHL}	50			ns	

Timing Chart

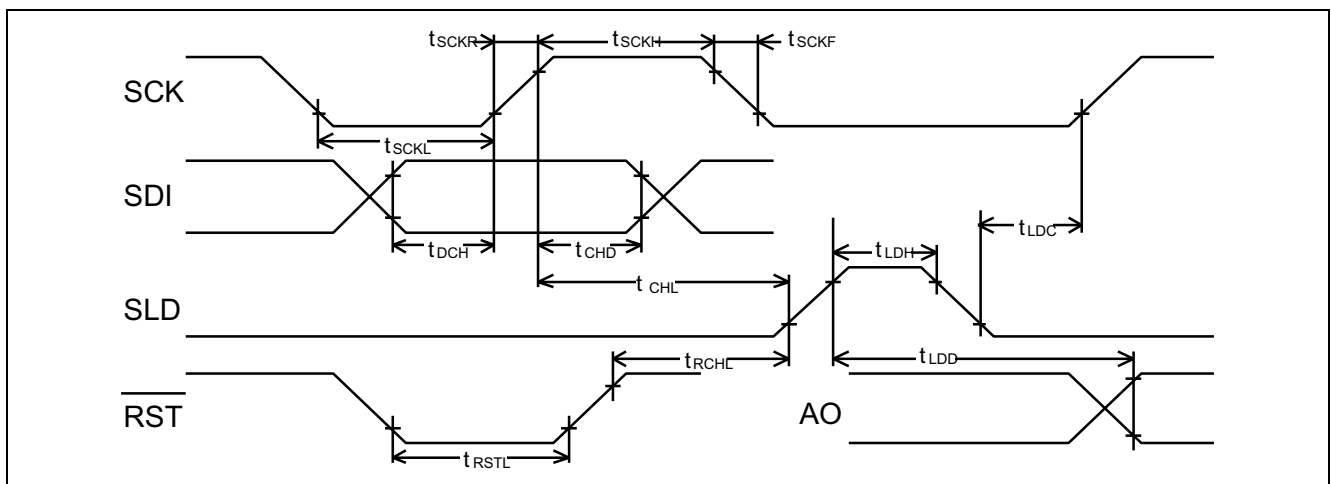

Electrical Characteristics

(Unless specified otherwise, VCC = VDD = 5 V \pm 10%, Vref = 2 V to VCC, VSS = GND = 0 V, fsck = 5 MHz, VDINH = VDD, VDINL = VSS, Ta = 20°C to 75°C)


(1) Digital block

Item	Symbol	Specification Values			Unit	Test Conditions
		Min.	Typ.	Max.		
Digital block circuit current	IDD			1.0	mA	
Input leakage current	IDINLK	-1.0	0	1.0	μ A	VDIN = VSS to VDD
Input threshold voltage	VDINT	0.2VDD		0.5VDD	V	
Input hysteresis voltage	Δ VDINT		100		mV	

(2) Analog block

Item	Symbol	Specification Values			Unit	Test Conditions
		Min.	Typ.	Max.		
Analog block circuit current	ICC		0.8	2.0	mA	No load
Reference voltage input current	Iref		0.5	1.0	mA	All channels: Maximum current conditions
Differential nonlinearity error	SDL	-1.0		1.0	LSB	VCC = VDD = 2.7V to 5.5V
Nonlinearity error	SNL	-1.5		1.5	LSB	IA0: With no load
Zero scale error	SZERO	-2.0		2.0	LSB	
Full-scale error	SFULL	-2.0		2.0	LSB	
Output current	IAO	\pm 0.5			mA	VOA = 0.1V to VCC - 0.1V
Settling time	tLDD		5	10	μ S	VOA = 0.5 \leftrightarrow 4.5V, IOA = 0.1mA, Co = 50pF output absorbed within \pm 0.5 LSB
Power-on reset voltage	VPR	0.8	1.5	2.5	V	VCC = 0 V \rightarrow 5 V, VOA = 0 V setting voltage (reference values)

Digital Data Format

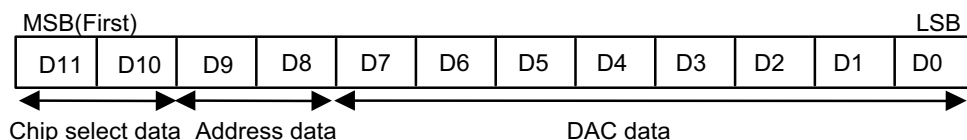

(1) Chip select data

D11	D10	CS1	CS0
0	0	L	L
0	1	L	H
1	0	H	L
1	1	H	H

Data is transferred only when logic of D11 and D10 matches CS pin setting (CS1, CS0).


(2) Address data

D8	D9	Channel Selection
0	0	AO1 selected
0	1	AO2 selected
1	0	AO3 selected
1	1	AO4 selected


DAC Data

D7	D6	D5	D4	D3	D2	D1	D0	D-A output
0	0	0	0	0	0	0	0	$(0/256) \times V_{ref}$
0	0	0	0	0	0	0	1	$(1/256) \times V_{ref}$
0	0	0	0	0	0	1	0	$(2/256) \times V_{ref}$
0	0	0	0	0	0	1	1	$(3/256) \times V_{ref}$
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
1	1	1	1	1	1	1	0	$(254/256) \times V_{ref}$
1	1	1	1	1	1	1	1	$(255/256) \times V_{ref}$

Data Timing Chart

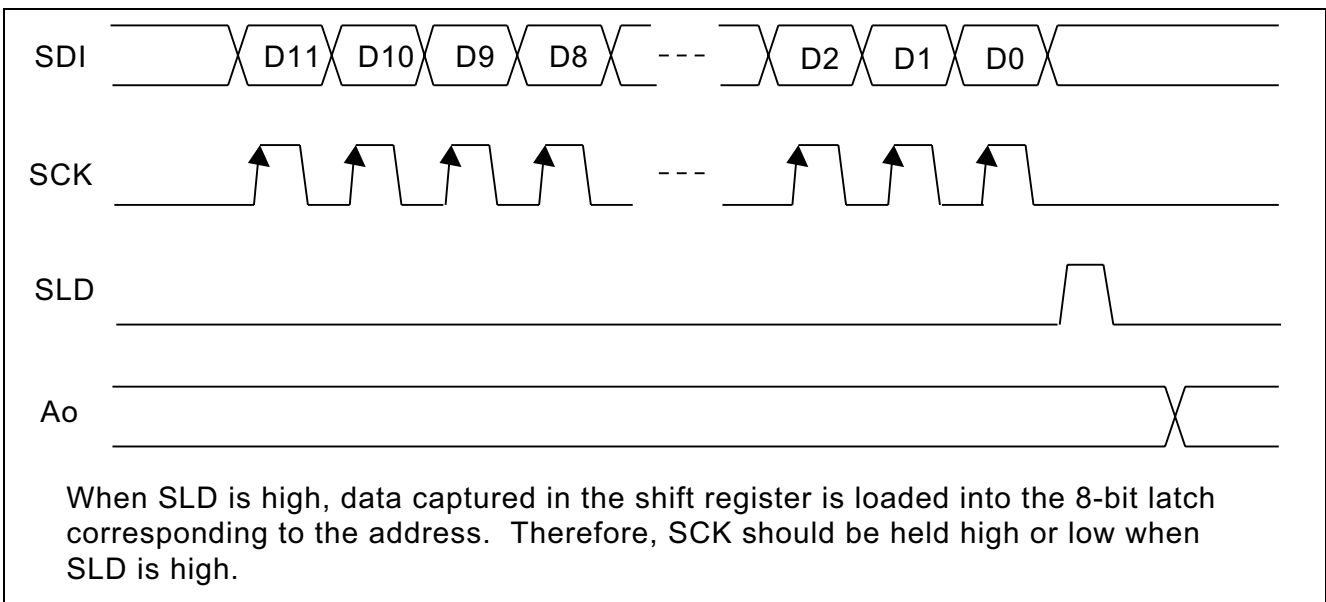


Sample Application Circuit

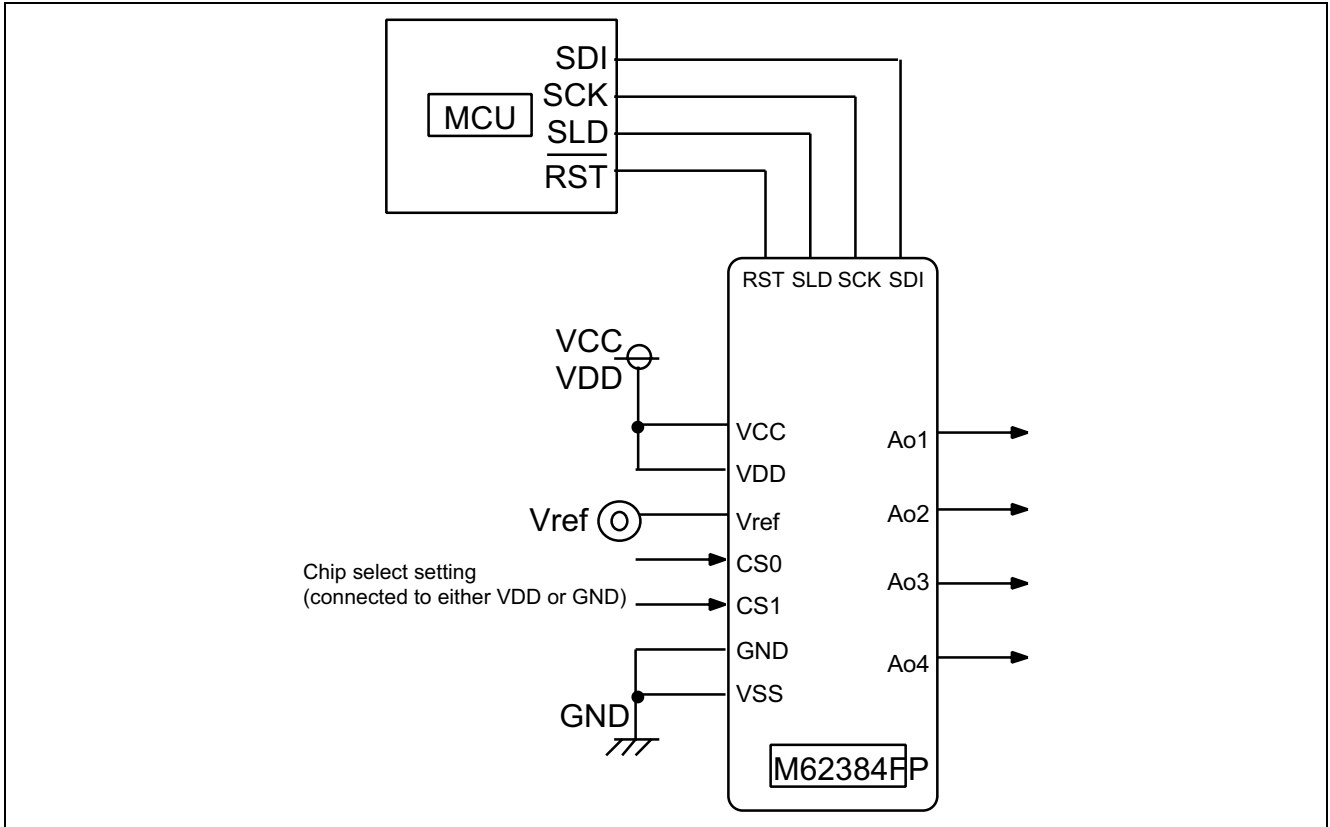

Package Dimensions

JEITA Package Code	RENESAS Code	Previous Code	MASS[Typ.]
P-SOP16-5.3x10.1-1.27	PRSP0016DE-A	16P2N-A	0.2g

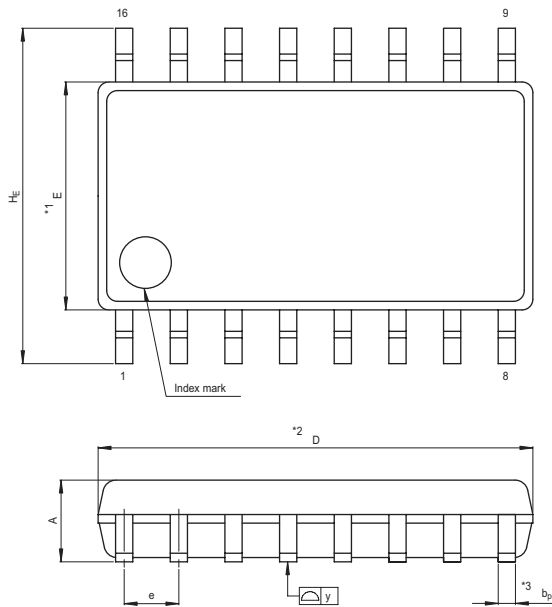

NOTE)
 1. DIMENSIONS **1* AND **2* DO NOT INCLUDE MOLD FLASH.
 2. DIMENSION **3* DOES NOT INCLUDE TRIM OFFSET.

Reference Symbol	Dimension in Millimeters		
	Min	Nom	Max
D	10.0	10.1	10.2
E	5.2	5.3	5.4
A ₂	—	1.8	—
A ₁	0	0.1	0.2
A	—	—	2.1
b _P	0.35	0.4	0.5
c	0.18	0.2	0.25
θ	0°	—	8°
H _E	7.5	7.8	8.1
e	1.12	1.27	1.42
y	—	—	0.1
L	0.4	0.6	0.8

Notes:

1. This document is provided for reference purposes only so that Renesas customers may select the appropriate Renesas products for their use. Renesas neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any intellectual property rights or any other rights of Renesas or any third party with respect to the information in this document.
2. Renesas shall have no liability for damages or infringement of any intellectual property or other rights arising out of the use of any information in this document, including, but not limited to, product data, diagrams, charts, programs, algorithms, and application circuit examples.
3. You should not use the products or the technology described in this document for the purpose of military applications such as the development of weapons of mass destruction or for the purpose of any other military use. When exporting the products or technology described herein, you should follow the applicable export control laws and regulations, and procedures required by such laws and regulations.
4. All information included in this document such as product data, diagrams, charts, programs, algorithms, and application circuit examples, is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas products listed in this document, please confirm the latest product information with a Renesas sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas such as that disclosed through our website. (<http://www.renesas.com>)
5. Renesas has used reasonable care in compiling the information included in this document, but Renesas assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.
6. When using or otherwise relying on the information in this document, you should evaluate the information in light of the total system before deciding about the applicability of such information to the intended application. Renesas makes no representations, warranties or guarantees regarding the suitability of its products for any particular application and specifically disclaims any liability arising out of the application and use of the information in this document or Renesas products.
7. With the exception of products specified by Renesas as suitable for automobile applications, Renesas products are not designed, manufactured or tested for applications or otherwise in systems the failure or malfunction of which may cause a direct threat to human life or create a risk of human injury or which require especially high quality and reliability such as safety systems, or equipment or systems for transportation and traffic, healthcare, combustion control, aerospace and aeronautics, nuclear power, or undersea communication transmission. If you are considering the use of our products for such purposes, please contact a Renesas sales office beforehand. Renesas shall have no liability for damages arising out of the uses set forth above.
8. Notwithstanding the preceding paragraph, you should not use Renesas products for the purposes listed below:
 - (1) artificial life support devices or systems
 - (2) surgical implantations
 - (3) healthcare intervention (e.g., excision, administration of medication, etc.)
 - (4) any other purposes that pose a direct threat to human lifeRenesas shall have no liability for damages arising out of the uses set forth in the above and purchasers who elect to use Renesas products in any of the foregoing applications shall indemnify and hold harmless Renesas Technology Corp., its affiliated companies and their officers, directors, and employees against any and all damages arising out of such applications.
9. You should use the products described herein within the range specified by Renesas, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas shall have no liability for malfunctions or damages arising out of the use of Renesas products beyond such specified ranges.
10. Although Renesas endeavors to improve the quality and reliability of its products, IC products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Please be sure to implement safety measures to guard against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other applicable measures. Among others, since the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
11. In case Renesas products listed in this document are detached from the products to which the Renesas products are attached or affixed, the risk of accident such as swallowing by infants and small children is very high. You should implement safety measures so that Renesas products may not be easily detached from your products. Renesas shall have no liability for damages arising out of such detachment.
12. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written approval from Renesas.
13. Please contact a Renesas sales office if you have any questions regarding the information contained in this document, Renesas semiconductor products, or if you have any other inquiries.



RENESAS SALES OFFICES

<http://www.renesas.com>

Refer to "<http://www.renesas.com/en/network>" for the latest and detailed information.

Renesas Technology America, Inc.
450 Holger Way, San Jose, CA 95134-1368, U.S.A
Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

Renesas Technology Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

Renesas Technology (Shanghai) Co., Ltd.
Unit 204, 205, AZIACenter, No.1233 Lujiazui Ring Rd, Pudong District, Shanghai, China 200120
Tel: <86> (21) 5877-1818, Fax: <86> (21) 6887-7858/7898

Renesas Technology Hong Kong Ltd.
7th Floor, North Tower, World Finance Centre, Harbour City, Canton Road, Tsimshatsui, Kowloon, Hong Kong
Tel: <852> 2265-6688, Fax: <852> 2377-3473

Renesas Technology Taiwan Co., Ltd.
10th Floor, No.99, Fushing North Road, Taipei, Taiwan
Tel: <886> (2) 2715-2888, Fax: <886> (2) 3518-3399

Renesas Technology Singapore Pte. Ltd.
1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632
Tel: <65> 6213-0200, Fax: <65> 6278-8001

Renesas Technology Korea Co., Ltd.
Kukje Center Bldg. 18th Fl., 191, 2-ka, Hangang-ro, Yongsan-ku, Seoul 140-702, Korea
Tel: <82> (2) 796-3115, Fax: <82> (2) 796-2145

Renesas Technology Malaysia Sdn. Bhd
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No.18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: <603> 7955-9390, Fax: <603> 7955-9510