

WIDEBAND MMIC VCO w/ BUFFER AMPLIFIER, 4 - 8 GHz

Typical Applications


Low Noise wideband MMIC VCO is ideal for:

- Industrial/Medical Equipment
- Test & Measurement Equipment
- Military Radar, EW & ECM

Features

- Wide Tuning Bandwidth
- Pout: +5 dBm
- Low SSB Phase Noise: -100 dBc/Hz @100 kHz
- No External Resonator Needed
- Single Positive Supply: +5V @ 55 mA
- RoHS Compliant 4 x 4 mm SMT Package

Functional Diagram

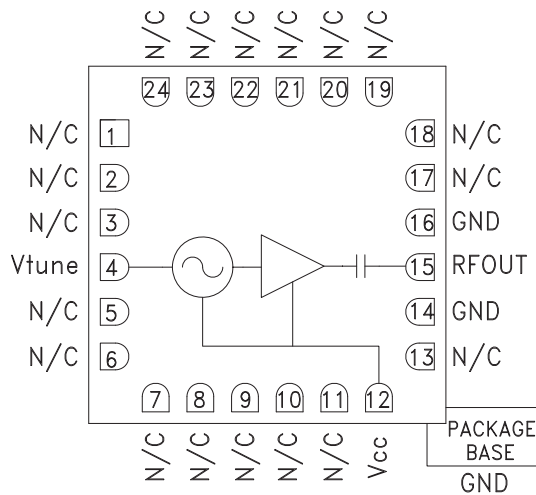

General Description


The HMC586LC4B is a wideband GaAs InGaP Voltage Controlled Oscillator which incorporates the resonator, negative resistance device, and varactor diode. Output power and phase noise performance are excellent over temperature due to the oscillator's monolithic construction. The Vtune port accepts an analog tuning voltage from 0 to +18V. The HMC586LC4B VCO operates from a single +5V supply, consumes only 55 mA of current, and is housed in a RoHS compliant SMT package. This wideband VCO uniquely combines the attributes of ultra small size, low phase noise, low power consumption, and wide tuning range.

Electrical Specifications, $T_A = +25^\circ C$, $V_{cc} = +5V$


| Parameter | Min. | Typ. | Max. | Units |
|--|-----------|------|------|--------|
| Frequency Range | 4.0 - 8.0 | | | GHz |
| Power Output | 2 | 5 | | dBm |
| SSB Phase Noise @ 100 kHz Offset | | -100 | | dBc/Hz |
| SSB Phase Noise @ 10 kHz Offset | | -75 | | dBc/Hz |
| Tune Voltage (Vtune) | 0 | | 18 | V |
| Supply Current (Icc) (Vcc = +5.0V) | 40 | | 75 | mA |
| Tune Port Leakage Current (Vtune = +15V) | | | 10 | µA |
| Output Return Loss | | 7 | | dB |
| 2nd Harmonic | | -14 | | dBc |
| Pulling (into a 2.0:1 VSWR) | | 4 | | MHz pp |
| Pushing @ Vtune= +5V | | 40 | | MHz/V |
| Frequency Drift Rate | | 0.8 | | MHz/°C |

WIDEBAND MMIC VCO w/ BUFFER AMPLIFIER, 4 - 8 GHz


Frequency vs. Tuning Voltage, Vcc = +5V

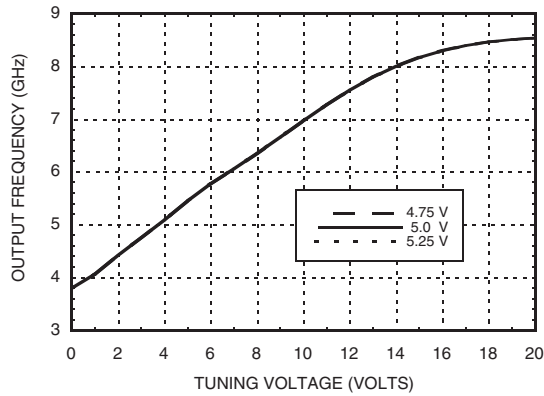


Frequency vs. Tuning Voltage, T = +25 C

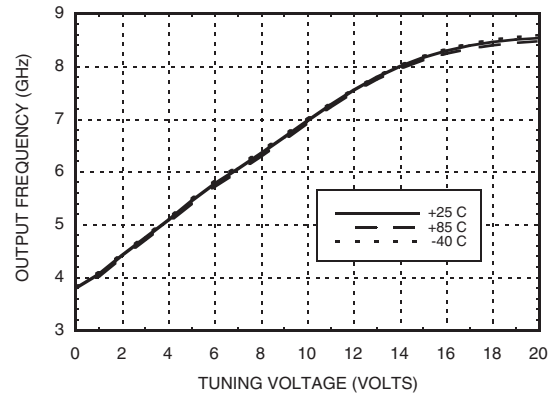


Sensitivity vs. Tuning Voltage, Vcc= +5V

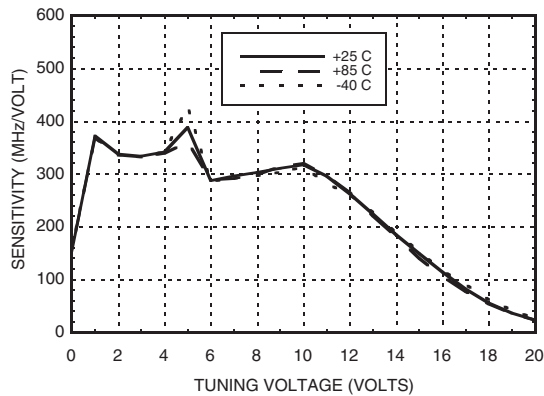


Output Power vs. Tuning Voltage, Vcc= +5V

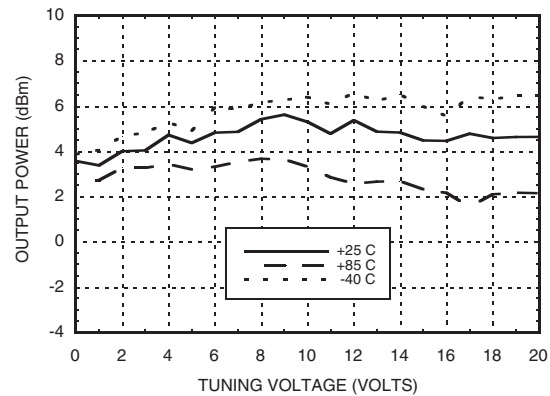

SSB Phase Noise vs. Tuning Voltage

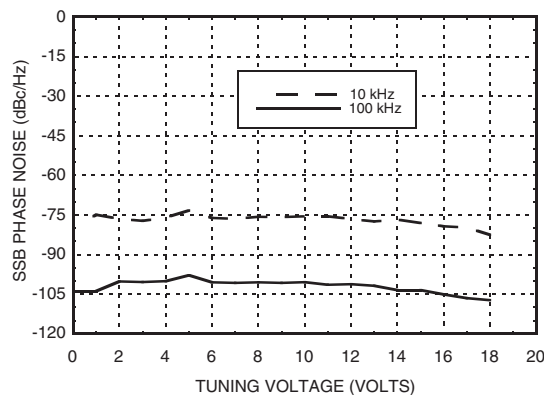

Typical SSB Phase Noise @ Vtune= +5V

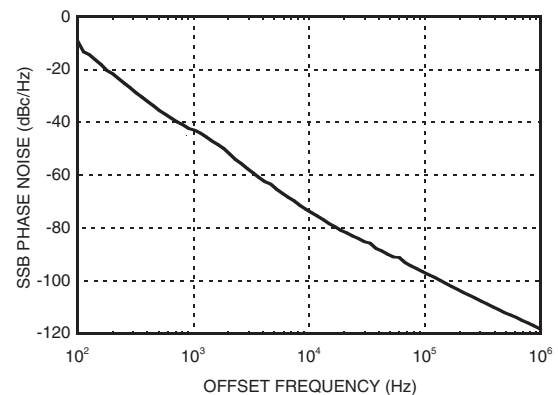


Absolute Maximum Ratings

| | |
|---|----------------|
| Vcc | +5.5 Vdc |
| Vtune | 0 to +22V |
| Junction Temperature | 135 °C |
| Continuous P _{diss} (T = 85°C) (derate 12.5 mW/°C above 85°C) | 625 mW |
| Thermal Resistance (junction to ground paddle) | 80 °C/W |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C |





ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS



Outline Drawing

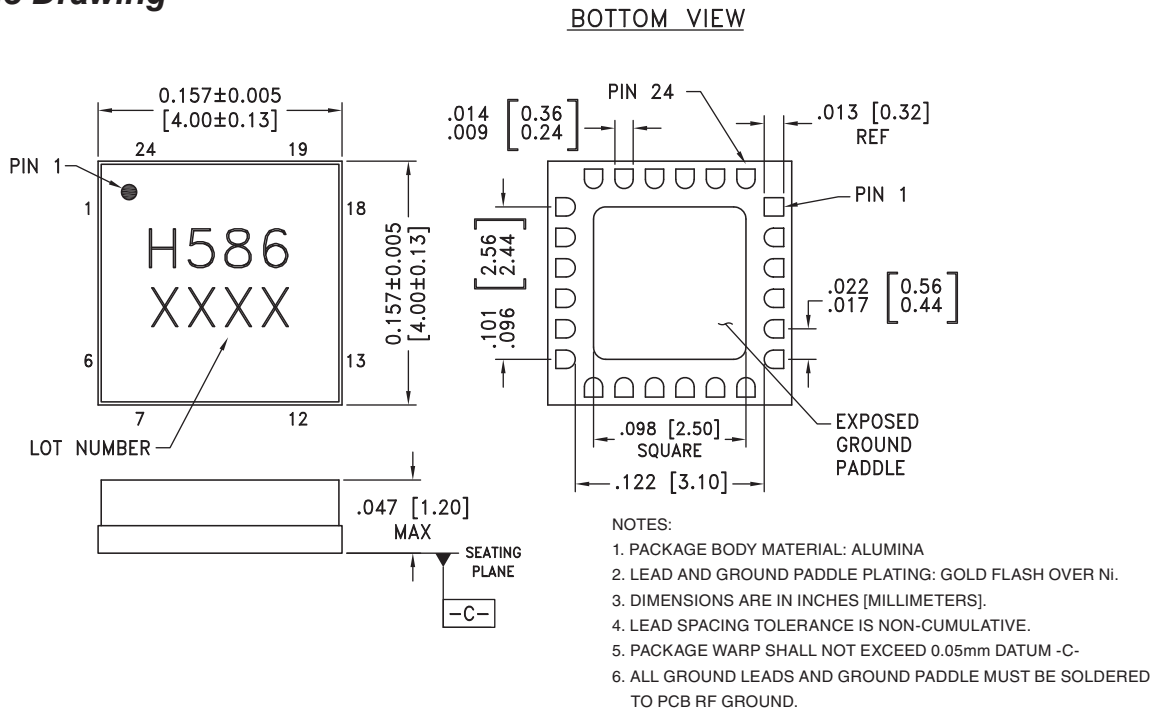


Pin Descriptions
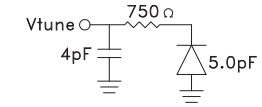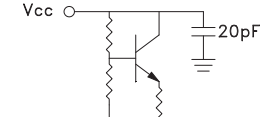
| Pin Number | Function | Description | Interface Schematic |
|----------------------------|----------|---|---|
| 1 - 3, 5 - 11, 13, 17 - 24 | N/C | No Connection. These pins may be connected to RF/DC ground. Performance will not be affected. | |
| 4 | Vtune | Control Voltage and Modulation Input. Modulation bandwidth dependent on drive source impedance. See "Determining the FM Bandwidth of a Wideband Varactor Tuned VCO" application note. |  |
| 12 | Vcc | Supply Voltage Vcc= +5V |  |

Pin Descriptions

| Pin Number | Function | Description | Interface Schematic |
|------------|----------|--|---|
| 14, 16 | GND | Package bottom has an exposed metal paddle that must also be RF & DC grounded. |  |
| 15 | RFOUT | RF output (AC coupled) |  |

Evaluation PCB

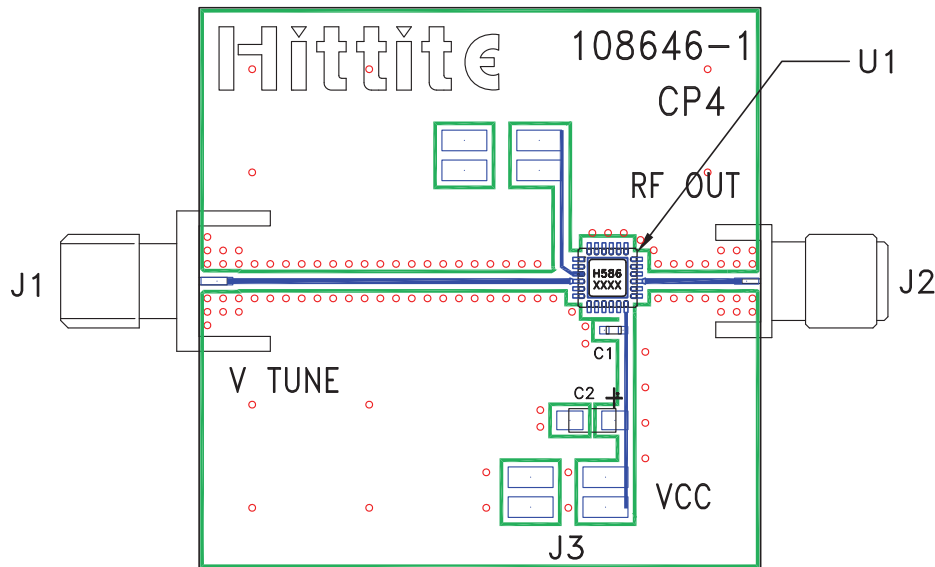

List of Materials for Evaluation PCB 108648 [1]

| Item | Description |
|---------|-------------------------------------|
| J1 | PCB Mount SMA RF Connector, Johnson |
| J2 | PCB Mount SMA Connector, SRI |
| J3 | DC Header |
| C1 | 1000 pF Capacitor, 0402 Pkg. |
| C2 | 4.7 μF Capacitor, Tantalum |
| U1 | HMC586LC4B VCO |
| PCB [2] | 108646 Eval Board |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed ground paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.