

**ADVANCED ANALOG
HIGH RELIABILITY
HYBRID DC/DC CONVERTERS**


AFL270XXS SERIES
270V Input, Single Output

Description

The AFL Series of DC/DC converters feature high power density with no derating over the full military temperature range. This series is offered as part of a complete family of converters providing single and dual output voltages and operating from nominal +28 or +270 volt inputs with output power ranging from 80 to 120 watts. For applications requiring higher output power, multiple converters can be operated in parallel. The internal current sharing circuits assure equal current distribution among the paralleled converters. This series incorporates Advanced Analog's proprietary magnetic pulse feedback technology providing optimum dynamic line and load regulation response. This feedback system samples the output voltage at the pulse width modulator fixed clock frequency, nominally 550 KHz. Multiple converters can be synchronized to a system clock in the 500 KHz to 700 KHz range or to the synchronization output of one converter. Undervoltage lockout, primary and secondary referenced inhibit, soft-start and load fault protection are provided on all models.

These converters are hermetically packaged in two enclosure variations, utilizing copper core pins to minimize resistive DC losses. Three lead styles are available, each fabricated with Advanced Analog's rugged ceramic lead-to-package seal assuring long term hermeticity in the most harsh environments.

Manufactured in a facility fully qualified to MIL-PRF-38534, these converters are available in four screening grades to satisfy a wide range of requirements. The CH grade is fully compliant to the requirements of MIL-PRF-38534 for class H. The HB grade is fully processed and screened to the class H requirement, but does not have material element evaluated to the class H requirement. Both grades are tested to meet the complete group "A" test specification over the full military temperature range without output power deration. Two grades with more limited screening are also available for use in less



Features

- 160 To 400 Volt Input Range
- 5, 6, 9, 12, 15 and 28 Volt Outputs Available
- High Power Density - up to 84 W /in³
- Up To 120 Watt Output Power
- Parallel Operation with Stress and Current Sharing
- Low Profile (0.380") Seam Welded Package
- Ceramic Feedthru Copper Core Pins
- High Efficiency - to 87%
- Full Military Temperature Range
- Continuous Short Circuit and Overload Protection
- Remote Sensing Terminals
- Primary and Secondary Referenced Inhibit Functions
- Line Rejection > 60 dB - DC to 50KHz
- External Synchronization Port
- Fault Tolerant Design
- Dual Output Versions Available
- Standard Military Drawings Available

demanding applications. Variations in electrical, mechanical and screening can be accommodated. Contact Advanced Analog for special requirements.

AFL270XXS Series
SPECIFICATIONS

International
IRF Rectifier

| ABSOLUTE MAXIMUM RATINGS | | | |
|--------------------------|----------------------|-----------------|--|
| Input Voltage | -0.5V to 500V | | |
| Soldering Temperature | 300°C for 10 seconds | | |
| Case Temperature | Operating | -55°C to +125°C | |
| | Storage | -65°C to +135°C | |

Static Characteristics $-55^{\circ}\text{C} \leq T_{\text{CASE}} \leq +125^{\circ}\text{C}$, $160 \leq V_{\text{IN}} \leq 400$ unless otherwise specified.

| Parameter | Group A Subgroup | Test Conditions | Min | Nom | Max | Unit |
|---|------------------|--|--------|-------|--------|------------------|
| INPUT VOLTAGE | | Note 6 | 160 | 270 | 400 | V |
| OUTPUT VOLTAGE | | $V_{\text{IN}} = 270$ Volts, 100% Load | | | | |
| AFL27005S | 1 | | 4.95 | 5.00 | 5.05 | V |
| AFL27006S | 1 | | 5.94 | 6.00 | 6.06 | V |
| AFL27009S | 1 | | 8.91 | 9.00 | 9.09 | V |
| AFL27012S | 1 | | 11.88 | 12.00 | 12.12 | V |
| AFL27015S | 1 | | 14.85 | 15.00 | 15.15 | V |
| AFL27028S | 1 | | 27.72 | 28.00 | 28.28 | V |
| AFL27005S | 2, 3 | | 4.90 | | 5.10 | V |
| AFL27006S | 2, 3 | | 5.88 | | 6.12 | V |
| AFL27009S | 2, 3 | | 8.82 | | 9.18 | V |
| AFL27012S | 2, 3 | | 11.76 | | 12.24 | V |
| AFL27015S | 2, 3 | | 14.70 | | 15.30 | V |
| AFL27028S | 2, 3 | | 27.44 | | 28.56 | V |
| OUTPUT CURRENT | | $V_{\text{IN}} = 160, 270, 400$ Volts - Note 6 | | | | |
| AFL27005S | | | 16.0 | | | A |
| AFL27006S | | | 13.5 | | | A |
| AFL27009S | | | 10.0 | | | A |
| AFL27012S | | | 9.0 | | | A |
| AFL27015S | | | 8.0 | | | A |
| AFL27028S | | | 4.0 | | | A |
| OUTPUT POWER | | Note 6 | | | | |
| AFL27005S | | | 80 | | | W |
| AFL27006S | | | 81 | | | W |
| AFL27009S | | | 90 | | | W |
| AFL27012S | | | 108 | | | W |
| AFL27015S | | | 120 | | | W |
| AFL27028S | | | 112 | | | W |
| MAXIMUM CAPACITIVE LOAD | | Note 1 | 10,000 | | | μfd |
| OUTPUT VOLTAGE TEMPERATURE COEFFICIENT | | $V_{\text{IN}} = 270$ Volts, 100% Load - Note 1, 6 | -0.015 | | +0.015 | %/°C |
| OUTPUT VOLTAGE REGULATION | | | | | | |
| AFL27028S Line | 1, 2, 3 | No Load, 50% Load, 100% Load | -70.0 | | +70.0 | mV |
| All Others Line | 1, 2, 3 | $V_{\text{IN}} = 160, 270, 400$ Volts | -10.0 | | +10.0 | mV |
| Load | 1, 2, 3 | | -1.0 | | +1.0 | % |
| OUTPUT RIPPLE VOLTAGE | | $V_{\text{IN}} = 160, 270, 400$ Volts, 100% Load, BW = 10MHz | | | | |
| AFL27005S | 1, 2, 3 | | | | 30 | mV _{pp} |
| AFL27006S | 1, 2, 3 | | | | 35 | mV _{pp} |
| AFL27009S | 1, 2, 3 | | | | 40 | mV _{pp} |
| AFL27012S | 1, 2, 3 | | | | 45 | mV _{pp} |
| AFL27015S | 1, 2, 3 | | | | 50 | mV _{pp} |
| AFL27028S | 1, 2, 3 | | | | 100 | mV _{pp} |

For Notes to Specifications, refer to page 4

Static Characteristics (Continued)

| Parameter | Group A Subgroups | Test Conditions | Min | Nom | Max | Unit | |
|--|-------------------|--|------|-----|------------|------------------|------|
| INPUT CURRENT No Load Inhibit 1 Inhibit 2 | 1 | $V_{IN} = 270$ Volts $I_{OUT} = 0$ | | | 15.00 | mA | |
| | 2, 3 | | | | 17.00 | mA | |
| | 1, 2, 3 | Pin 4 Shorted to Pin 2 | | | 3.00 | mA | |
| | 1, 2, 3 | Pin 12 Shorted to Pin 8 | | | 5.00 | mA | |
| INPUT RIPPLE CURRENT AFL27005S AFL27006S AFL27009S AFL27012S AFL27015S AFL27028S | 1, 2, 3 | $V_{IN} = 270$ Volts, 100% Load B.W. = 10MHz | | | 60 | mA _{pp} | |
| | 1, 2, 3 | | | | 60 | mA _{pp} | |
| | 1, 2, 3 | | | | 70 | mA _{pp} | |
| | 1, 2, 3 | | | | 70 | mA _{pp} | |
| | 1, 2, 3 | | | | 80 | mA _{pp} | |
| | 1, 2, 3 | | | | 80 | mA _{pp} | |
| CURRENT LIMIT POINT Expressed as a Percentage of Full Rated Load | 1 | $V_{OUT} = 90\% V_{NOM}$ Note 5 | 115 | | 125 | % | |
| | 2 | | 105 | | 115 | % | |
| | 3 | | 125 | | 140 | % | |
| | | | | | | | |
| LOAD FAULT POWER DISSIPATION Overload or Short Circuit | 1, 2, 3 | $V_{IN} = 270$ Volts | | | 30 | W | |
| EFFICIENCY AFL27005S AFL27006S AFL27009S AFL27012S AFL27015S AFL27028S | 1, 2, 3 | $V_{IN} = 270$ Volts, 100% Load | 78 | 82 | | % | |
| | 1, 2, 3 | | 79 | 83 | | % | |
| | 1, 2, 3 | | 80 | 84 | | % | |
| | 1, 2, 3 | | 82 | 85 | | % | |
| | 1, 2, 3 | | 83 | 87 | | % | |
| | 1, 2, 3 | | 82 | 85 | | % | |
| ENABLE INPUTS (Inhibit Function) Converter Off Sink Current Converter On Sink Current | 1, 2, 3 | Logical Low, Pin 4 or Pin 12 Note 1 | -0.5 | | 0.8 100 | V μA | |
| | 1, 2, 3 | Logical High, Pin 4 and Pin 12 - Note 9 Note 1 | 2.0 | | 50 100 | V μA | |
| | | | | | | | |
| | | | | | | | |
| SWITCHING FREQUENCY | 1, 2, 3 | | 500 | 550 | 600 | KHz | |
| SYNCHRONIZATION INPUT Frequency Range Pulse Amplitude, Hi Pulse Amplitude, Lo Pulse Rise Time Pulse Duty Cycle | 1, 2, 3 | Note 1 Note 1 | 500 | | 700 | KHz | |
| | 1, 2, 3 | | 2.0 | | 10 | V | |
| | 1, 2, 3 | | -0.5 | | 0.8 | V | |
| | | | | | | 100 | nSec |
| | | | | | | 80 | % |
| ISOLATION | 1 | Input to Output or Any Pin to Case (except Pin 3). Test @ 500VDC | 100 | | | MΩ | |
| DEVICE WEIGHT | | Slight Variations with Case Style | | 85 | | gms | |
| MTBF | | MIL-HDBK-217F, A1F @ $T_C = 70^\circ\text{C}$ | 300 | | | KHrs | |

For Notes to Specifications, refer to page 4

AFL270XXS Series

International
IRF Rectifier


Dynamic Characteristics $-55^{\circ}\text{C} \leq T_{\text{CASE}} \leq +125^{\circ}\text{C}$, $V_{\text{IN}} = 270$ Volts unless otherwise specified.

| Parameter | Group A Subgroups | Test Conditions | Min | Nom | Max | Unit |
|---|--------------------|--|--------------------------------------|-------|------|-----------------|
| LOAD TRANSIENT RESPONSE | | | | | | |
| Note 2, 8 | | | | | | |
| AFL27005S | Amplitude Recovery | 4, 5, 6 | Load Step 50% \Leftrightarrow 100% | -450 | 450 | mV |
| | | 4, 5, 6 | | | | 200 |
| AFL27006S | Amplitude Recovery | 4, 5, 6 | Load Step 10% \Leftrightarrow 50% | -450 | 450 | mV |
| | | 4, 5, 6 | | | | 400 |
| AFL27006S | Amplitude Recovery | 4, 5, 6 | Load Step 50% \Leftrightarrow 100% | -450 | 450 | mV |
| | | 4, 5, 6 | | | | 200 |
| AFL27009S | Amplitude Recovery | 4, 5, 6 | Load Step 10% \Leftrightarrow 50% | -450 | 450 | mV |
| | | 4, 5, 6 | | | | 400 |
| AFL27009S | Amplitude Recovery | 4, 5, 6 | Load Step 50% \Leftrightarrow 100% | -600 | 600 | mV |
| | | 4, 5, 6 | | | | 200 |
| AFL27012S | Amplitude Recovery | 4, 5, 6 | Load Step 10% \Leftrightarrow 50% | -600 | 600 | mV |
| | | 4, 5, 6 | | | | 400 |
| AFL27012S | Amplitude Recovery | 4, 5, 6 | Load Step 50% \Leftrightarrow 100% | -750 | 750 | mV |
| | | 4, 5, 6 | | | | 200 |
| AFL27015S | Amplitude Recovery | 4, 5, 6 | Load Step 10% \Leftrightarrow 50% | -750 | 750 | mV |
| | | 4, 5, 6 | | | | 400 |
| AFL27015S | Amplitude Recovery | 4, 5, 6 | Load Step 50% \Leftrightarrow 100% | -900 | 900 | mV |
| | | 4, 5, 6 | | | | 200 |
| AFL27028S | Amplitude Recovery | 4, 5, 6 | Load Step 10% \Leftrightarrow 50% | -900 | 900 | mV |
| | | 4, 5, 6 | | | | 400 |
| AFL27028S | Amplitude Recovery | 4, 5, 6 | Load Step 50% \Leftrightarrow 100% | -1200 | 1200 | mV |
| | | 4, 5, 6 | | | | 200 |
| AFL27028S | Amplitude Recovery | 4, 5, 6 | Load Step 10% \Leftrightarrow 50% | -1200 | 1200 | mV |
| | | 4, 5, 6 | | | | 400 |
| LINE TRANSIENT RESPONSE | | | | | | |
| Note 1, 2, 3 | | | | | | |
| Amplitude Recovery | | V_{IN} Step = 160 \Leftrightarrow 400 Volts | -500 | | 500 | mV |
| | | | | | 500 | μSec |
| TURN-ON CHARACTERISTICS | | | | | | |
| $V_{\text{IN}} = 160, 270, 400$ Volts. Note 4 | | | | | | |
| Overshoot Delay | 4, 5, 6 | Enable 1, 2 on. (Pins 4, 12 high or open) | 50 | 75 | 250 | mV |
| | 4, 5, 6 | | | | 120 | mSec |
| LOAD FAULT RECOVERY | | | | | | |
| Same as Turn On Characteristics. | | | | | | |
| LINE REJECTION | | | | | | |
| MIL-STD-461, CS101, 30Hz to 50KHz Note 1 | | | | | | |
| | | | 60 | 70 | | dB |

Notes to Specifications:

- Parameters not 100% tested but are guaranteed to the limits specified in the table.
- Recovery time is measured from the initiation of the transient to where V_{OUT} has returned to within $\pm 1\%$ of V_{OUT} at 50% load.
- Line transient transition time $\geq 100 \mu\text{Sec}$.
- Turn-on delay is measured with an input voltage rise time of between 100 and 500 volts per millisecond.
- Current limit point is that condition of excess load causing output voltage to drop to 90% of nominal.
- Parameter verified as part of another test.
- All electrical tests are performed with the remote sense leads connected to the output leads at the load.
- Load transient transition time $\geq 10 \mu\text{Sec}$.
- Enable inputs internally pulled high. Nominal open circuit voltage $\approx 4.0\text{VDC}$.

AFL270XXS Case Outlines

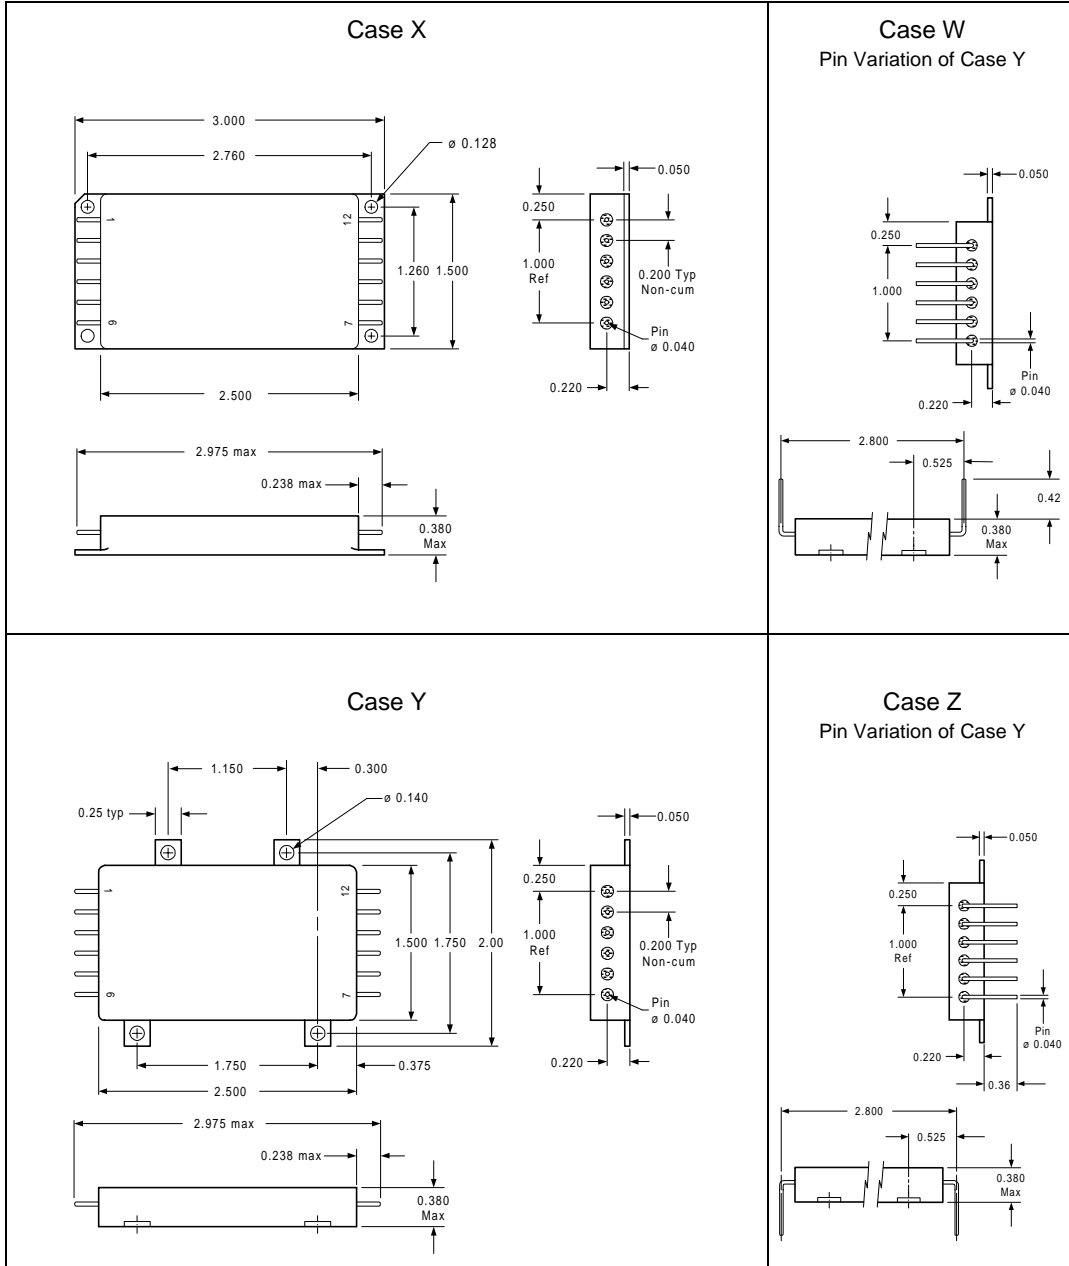

Tolerances, unless otherwise specified: .XX = ± 0.010
.XXX = ± 0.005

BERYLLIA WARNING: These converters are hermetically sealed; however they contain BeO substrates and should not be ground or subjected to any other operations including exposure to acids, which may produce Beryllium dust or fumes containing Beryllium

AFL270XXS Series

International
IRF Rectifier

AFL270XXS Pin Designation


| Pin No. | Designation |
|---------|-----------------|
| 1 | Positive Input |
| 2 | Input Return |
| 3 | Case |
| 4 | Enable 1 |
| 5 | Sync Output |
| 6 | Sync Input |
| 7 | Positive Output |
| 8 | Output Return |
| 9 | Return Sense |
| 10 | Positive Sense |
| 11 | Share |
| 12 | Enable 2 |

Available Screening Levels and Process Variations for AFL 270XXS Series.


| Requirement | MIL-STD-883 Method | No Suffix | ES Suffix | HB Suffix | CH Suffix |
|----------------------------|-------------------------------|--------------|-----------------|------------------|------------------|
| Temperature Range | | -20 to +85°C | -55°C to +125°C | -55°C to +125°C | -55°C to +125°C |
| Element Evaluation | | | | | MIL-PRF-38534 |
| Internal Visual | 2017 | * | ✓ | ✓ | ✓ |
| Temperature Cycle | 1010 | | Cond B | Cond C | Cond C |
| Constant Acceleration | 2001 | | 500g | Cond A | Cond A |
| Burn-in | 1015 | | 96hrs @ 125°C | 160hrs @ 125°C | 160hrs @ 125°C |
| Final Electrical (Group A) | MIL-PRF-38534 & Specification | 25°C | 25°C | -55, +25, +125°C | -55, +25, +125°C |
| Seal, Fine & Gross | 1014 | Cond C | Cond A, C | Cond A, C | Cond A, C |
| External Visual | 2009 | * | ✓ | ✓ | ✓ |

* per Commercial Standards

Part Numbering

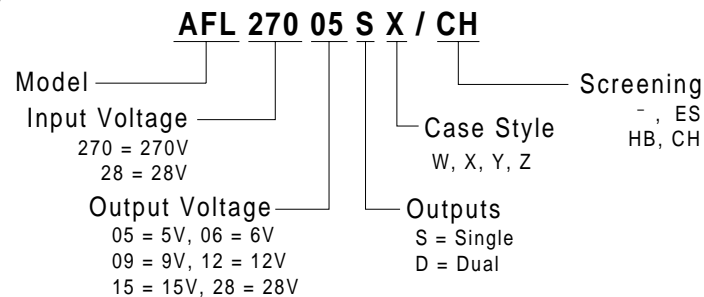

AFL270XXS Circuit Description
Figure I. AFL Single Output Block Diagram

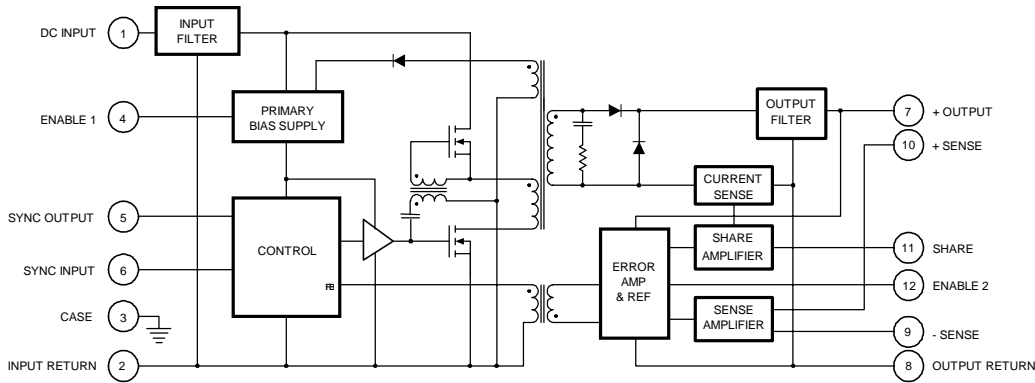

Circuit Operation and Application Information

The AFL series of converters employ a forward switched mode converter topology. (refer to Figure I.) Operation of the device is initiated when a DC voltage whose magnitude is within the specified input limits is applied between pins 1 and 2. If pin 4 is enabled (at a logical 1 or open) the primary bias supply will begin generating a regulated housekeeping voltage bringing the circuitry on the primary side of the converter to life. Two power MOSFETs used to chop the DC input voltage into a high frequency square wave, apply this chopped voltage to the power transformer. As this switching is initiated, a voltage is impressed on a second winding of the power transformer which is then rectified and applied to the primary bias supply. When this occurs, the input voltage is shut out and the primary bias voltage becomes exclusively internally generated.

The switched voltage impressed on the secondary output transformer winding is rectified and filtered to provide the converter output voltage. An error amplifier on the secondary side compares the output voltage to a precision reference and generates an error signal proportional to the difference. This error signal is magnetically coupled through the feedback transformer into the controller section of the converter varying the pulse width of the square wave signal driving the MOSFETs, narrowing the width if the output voltage is too high and widening it if it is too low.

Remote Sensing


Connection of the + and - sense leads at a remotely located load permits compensation for resistive voltage drop between the converter output and the load when they are physically separated by a significant distance. This connection allows regulation to the placard voltage at the point of application. When the remote sensing features is not

used, the sense leads should be connected to their respective output terminals at the converter. Figure III. illustrates a typical application.

Inhibiting Converter Output

As an alternative to application and removal of the DC voltage to the input, the user can control the converter output by providing TTL compatible, positive logic signals to either of two enable pins (pin 4 or 12). The distinction between these two signal ports is that enable 1 (pin 4) is referenced to the input return (pin 2) while enable 2 (pin 12) is referenced to the output return (pin 8). Thus, the user has access to an inhibit function on either side of the isolation barrier. Each port is internally pulled "high" so that when not used, an open connection on both enable pins permits normal converter operation. When their use is desired, a logical "low" on either port will shut the converter down.

Figure II. Enable Input Equivalent Circuit

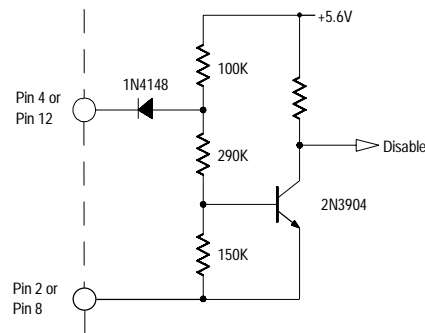

Internally, these ports differ slightly in their function. In use, a low on Enable 1 completely shuts down all circuits in the converter while a low on Enable 2 shuts down the secondary side while altering the controller duty cycle to near zero. Externally, the use of either port is transparent save for minor differences in idle current. (See specification table).

Synchronization of Multiple Converters


When operating multiple converters, system requirements often dictate operation of the converters at a common frequency. To accommodate this requirement, the AFL series converters provide both a synchronization input and output.

The sync input port permits synchronization of an AFL converter to any compatible external frequency source operating between 500 and 700 KHz. This input signal should be referenced to the input return and have a 10% to 90% duty cycle. Compatibility requires transition times less than 100 ns, maximum low level of +0.8 volts and a minimum high

level of +2.0 volts. The sync output of another converter which has been designated as the master oscillator provides a convenient frequency source for this mode of operation. When external synchronization is not required, the sync in pin should be left unconnected thereby permitting the converter to operate at its' own internally set frequency.

The sync output signal is a continuous pulse train set at 550 ±50 KHz, with a duty cycle of 15 ±5%. This signal is referenced to the input return and has been tailored to be compatible with the AFL sync input port. Transition times are less than 100 ns and the low level output impedance is less than 50 ohms. This signal is active when the DC input voltage is within the specified operating range and the converter is not inhibited. This output has adequate drive reserve to synchronize at least five additional converters. A typical synchronization connection option is illustrated in Figure III.

Figure III. Preferred Connection for Parallel Operation

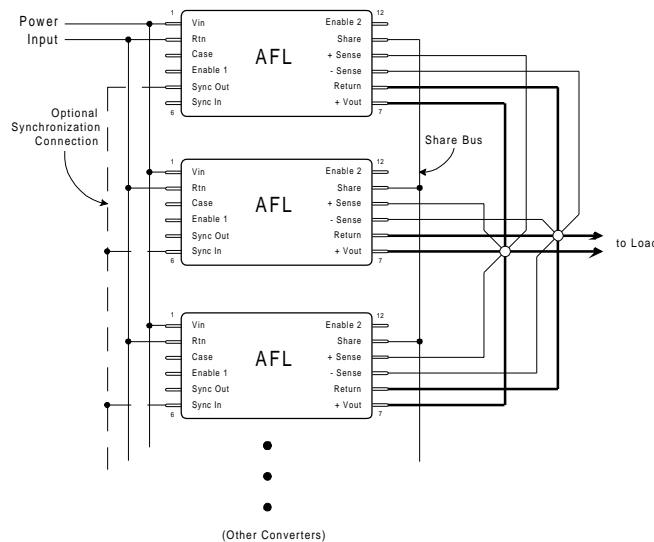

Parallel Operation-Current and Stress Sharing

Figure III. illustrates the preferred connection scheme for operation of a set of AFL converters with outputs operating in parallel. Use of this connection permits equal sharing of a load current exceeding the capacity of an individual AFL among the members of the set. An important feature of the

AFL series operating in the parallel mode is that in addition to sharing the current, the stress induced by temperature will also be shared. Thus if one member of a paralleled set is operating at a higher case temperature, the current it provides to the load will be reduced as compensation for the temperature induced stress on that device.

When operating in the shared mode, it is important that symmetry of connection be maintained as an assurance of optimum load sharing performance. Thus, converter outputs should be connected to the load with equal lengths of wire of the same gauge and sense leads from each converter should be connected to a common physical point, preferably at the load along with the converter output and return leads. All converters in a paralleled set must have their share pins connected together. This arrangement is diagrammatically illustrated in Figure III. showing the outputs and sense pins connected at a star point which is located close as possible to the load.

As a consequence of the topology utilized in the current sharing circuit, the share pin may be used for other functions. In applications requiring a single converter, the voltage appearing on the share pin may be used as a "current monitor". The share pin open circuit voltage is nominally +1.00v at no load and increases linearly with increasing output current to +2.20v at full load. The share pin voltage is referenced to the output return pin.

Thermal Considerations

Because of the incorporation of many innovative technological concepts, the AFL series of converters is capable of providing very high output power from a package of very small volume. These magnitudes of power density can only be obtained by combining high circuit efficiency with effective methods of heat removal from the die junctions. This requirement has been effectively addressed inside the device; but when operating at maximum loads, a significant amount of heat will be generated and this heat must be conducted away from the case. To maintain the case temperature at or below the specified maximum of 125°C, this heat must be transferred by conduction to an appropriate heat dissipater held in intimate contact with the converter base-plate.

Because effectiveness of this heat transfer is dependent on the intimacy of the baseplate/heatsink interface, it is strongly recommended that a high thermal conductivity heat transference medium is inserted between the baseplate and heatsink. The material most frequently utilized at the factory during all testing and burn-in processes is sold under the trade name of Sil-Pad® 400¹. This particular product is an insulator but electrically conductive versions are also available. Use of these materials assures maximum surface contact with the heat dissipater thereby compensating

for minor variations of either surface. While other available types of heat conductive materials and compounds may provide similar performance, these alternatives are often less convenient and are frequently messy to use.

A conservative aid to estimating the total heat sink surface area ($A_{\text{HEAT SINK}}$) required to set the maximum case temperature rise (ΔT) above ambient temperature is given by the following expression:

$$A_{\text{HEAT SINK}} \approx \left\{ \frac{\Delta T}{80P^{0.85}} \right\}^{-1.43} - 3.0$$

where

ΔT = Case temperature rise above ambient

P = Device dissipation in Watts = $P_{\text{OUT}} \left\{ \frac{1}{\text{Eff}} - 1 \right\}$

As an example, it is desired to maintain the case temperature of an AFL27015S at $\pm 85^\circ\text{C}$ in an area where the ambient temperature is held at a constant $+25^\circ\text{C}$; then

$$\Delta T = 85 - 25 = 60^\circ\text{C}$$

From the Specification Table, the worst case full load efficiency for this device is 83%; therefore the power dissipation at full load is given by

$$P = 120 \cdot \left\{ \frac{1}{.83} - 1 \right\} = 120 \cdot (0.205) = 24.6\text{W}$$

and the required heat sink area is

$$A_{\text{HEAT SINK}} = \left\{ \frac{60}{80 \cdot 24.6^{0.85}} \right\}^{-1.43} - 3.0 = 71 \text{ in}^2$$


Thus, a total heat sink surface area (including fins, if any) of 71 in² in this example, would limit case rise to 60°C above ambient. A flat aluminum plate, 0.25" thick and of approximate dimension 4" by 9" (36 in² per side) would suffice for this application in a still air environment. Note that to meet the criteria in this example, both sides of the plate require unrestricted exposure to the ambient air.

¹Sil-Pad is a registered Trade Mark of Bergquist, Minneapolis, MN

Input Filter

The AFL270XXS series converters incorporate a single stage LC input filter whose elements dominate the input load impedance characteristic during the turn-on sequence. The input circuit is as shown in Figure IV.

Figure IV. Input Filter Circuit



Undervoltage Lockout

A minimum voltage is required at the input of the converter to initiate operation. This voltage is set to 140 ± 5 volts. To preclude the possibility of noise or other variations at the input falsely initiating and halting converter operation, a hysteresis of approximately 10 volts is incorporated in this circuit. Thus if the input voltage droops to 130 ± 5 volts, the converter will shut down and remain inoperative until the input voltage returns to ≈ 140 volts.

Output Voltage Adjust

In addition to permitting close voltage regulation of remotely located loads, it is possible to utilize the converter sense pins to incrementally increase the output voltage over a limited range. The adjustments made possible by this method are intended as a means to “trim” the output to a voltage setting for some particular application, but are not intended to create an adjustable output converter. These output voltage setting variations are obtained by connecting an appropriate resistor value between the +sense and -sense pins while connecting the -sense pin to the output return pin as shown in Figure V. below. The range of adjustment and corresponding range of resistance values can be determined by use of the equation presented below.


$$R_{adj} = 100 \bullet \left\{ \frac{V_{NOM}}{V_{OUT} - V_{NOM} \cdot 0.025} \right\}$$

Where V_{NOM} = device nominal output voltage, and

V_{OUT} = desired output voltage

Finding a resistor value for a particular output voltage, is simply a matter of substituting the desired output voltage and the nominal device voltage into the equation and solving for the corresponding resistor value.

Figure V. Connection for V_{OUT} Adjustment



Caution: Do not set $R_{adj} < 500\Omega$

Attempts to adjust the output voltage to a value greater than 120% of nominal should be avoided because of the potential of exceeding internal component stress ratings and subsequent operation to failure. Under no circumstance should the external setting resistor be made less than 500Ω. By remaining within this specified range of values, completely safe operation fully within normal component derating is assured.

Examination of the equation relating output voltage and resistor value reveals a special benefit of the circuit topology utilized for remote sensing of output voltage in the AFL270XXS series of converters. It is apparent that as the resistance increases, the output voltage approaches the nominal set value of the device. In fact the calculated limiting value of output voltage as the adjusting resistor becomes very large is $\approx 25mV$ above nominal device voltage.







The consequence is that if the +sense connection is unintentionally broken, an AFL270XXS has a fail-safe output voltage of $V_{out} + 25mV$, where the 25mV is independent of the nominal output voltage. It can be further demonstrated that in the event of both the + and - sense connections being broken, the output will be limited to $V_{out} + 440mV$. This 440 mV is also essentially constant independent of the nominal output voltage. While operation in this condition is not damaging to the device, not all performance parameters will be met.

Performance Data

Typical performance data is graphically presented on the following pages for selected parameters on a variety of AFL270XXS type converters. The data presented was selected as representative of more critical parameters and for general interest in typical converter applications.

AFL270XXS - Typical Line Rejection Characteristics

Measured per MIL-STD 461D, CS101 with 100% Output Load, $V_{in} = 270VDC$

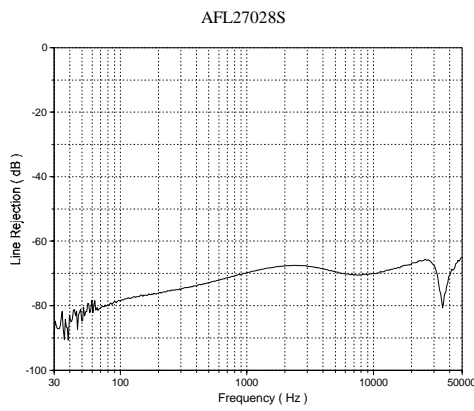
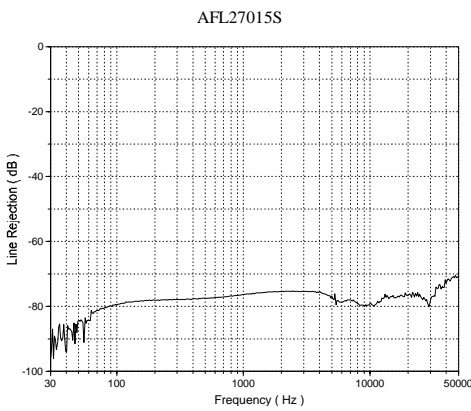
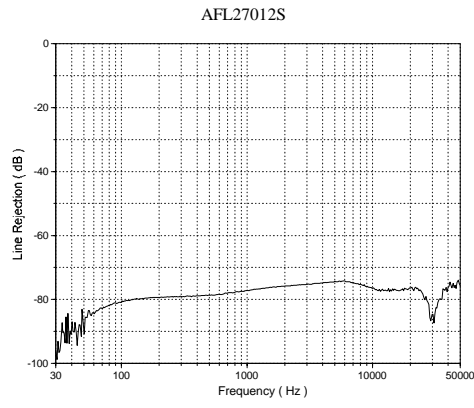
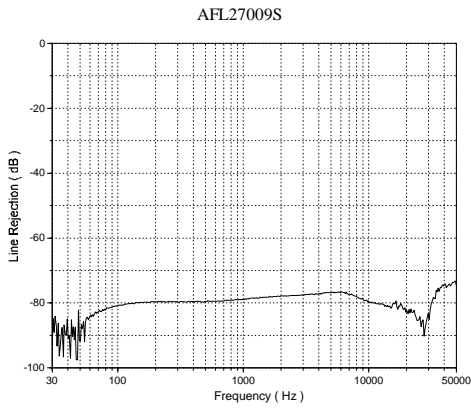
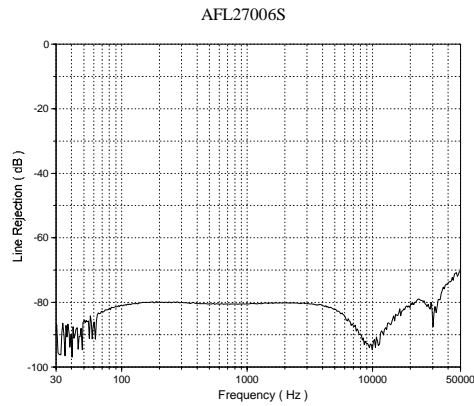
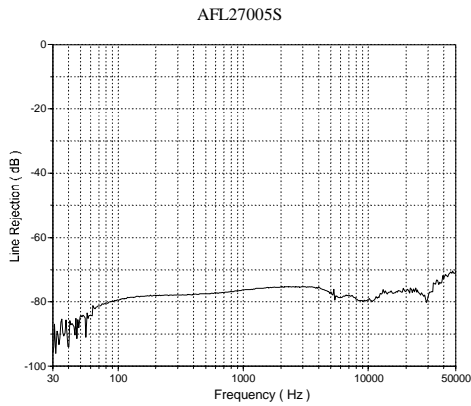


AFL270XXS Series

International
IRF Rectifier

AFL270XXS Typical Efficiency Characteristics


Presented for three values of Input Voltage.

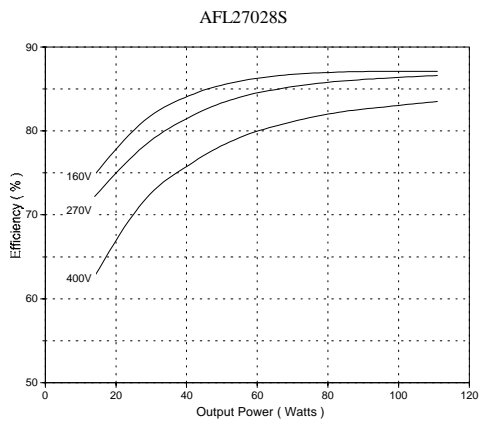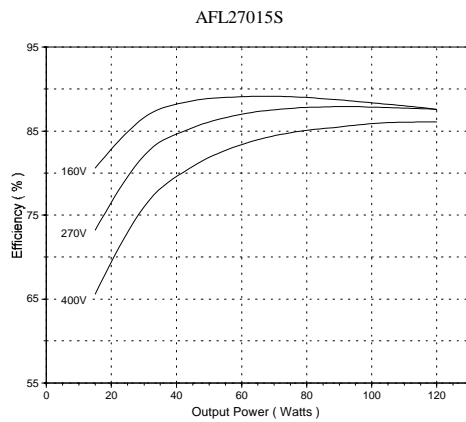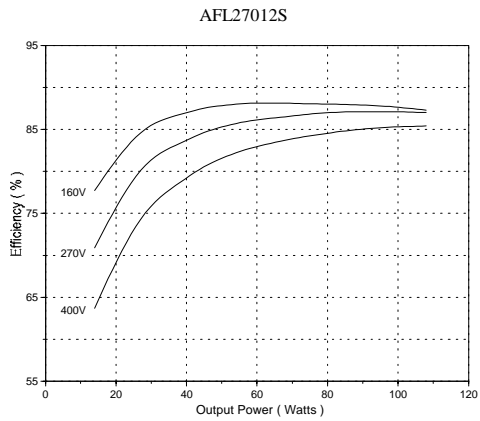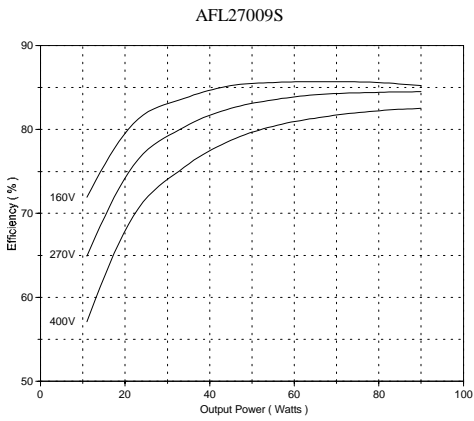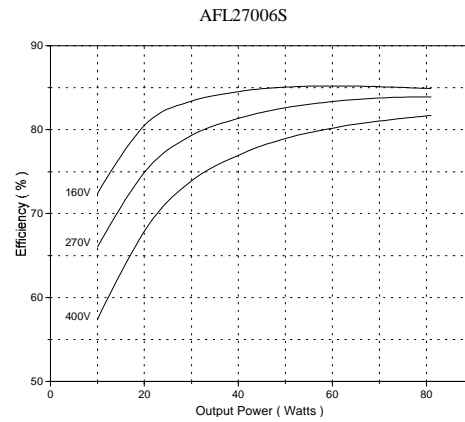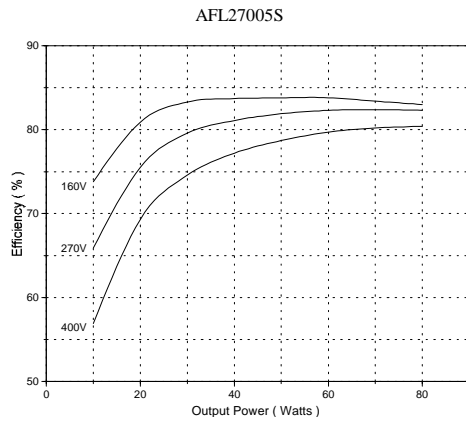


Typical Performance Characteristics - AFL27005S

Output Load = 100%, Vin = 270VDC unless otherwise specified.


Turn-on Time, No Load

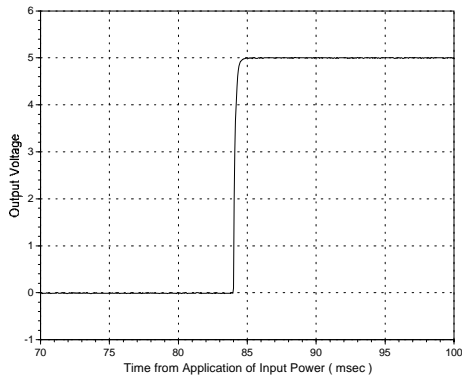


Turn-on Time, Full Load

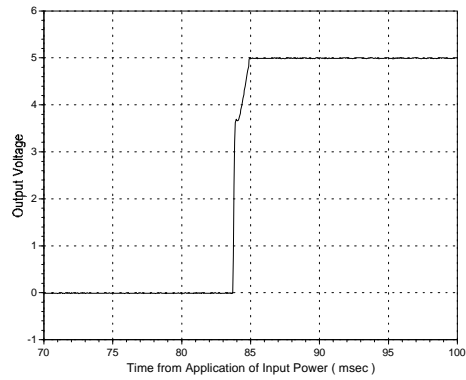


Output Ripple Voltage

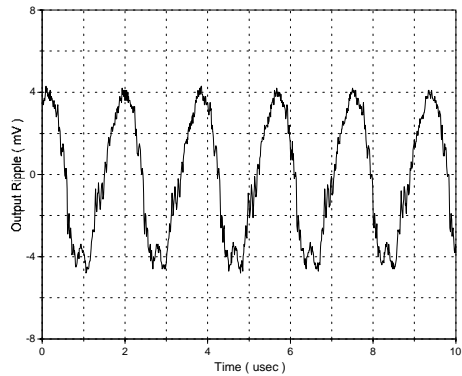


Input Ripple Current

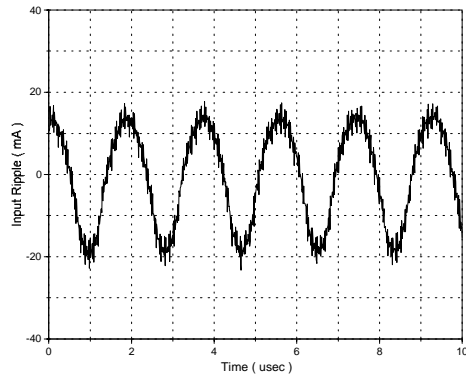

Output Load Transient Response
 50% Load to/from 100% Load

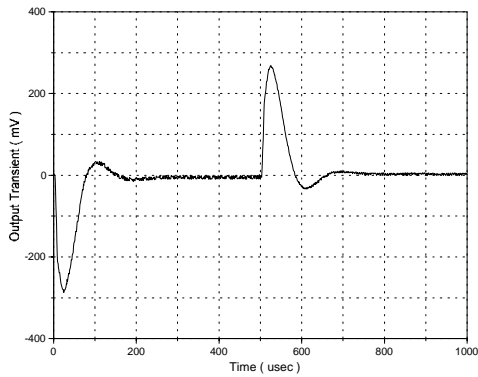


Output Load Transient Response
 10% Load to/from 50% Load

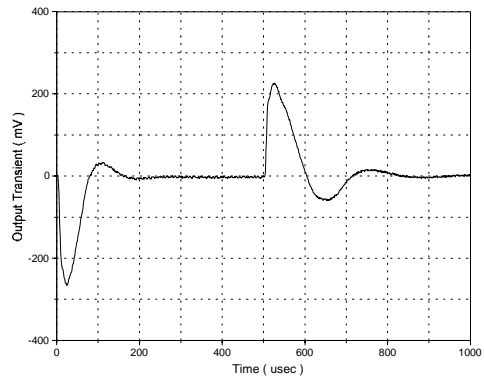


Typical Performance Characteristics - AFL27015S

Output Load = 100%, Vin = 270VDC unless otherwise specified.


Turn-on Time, No Load

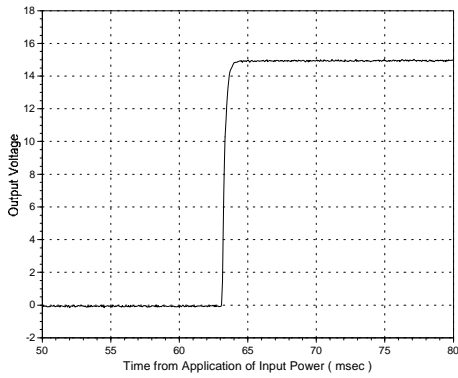


Turn-on Time, Full Load

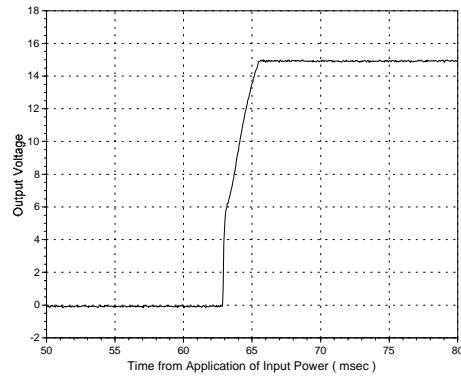


Output Ripple Voltage

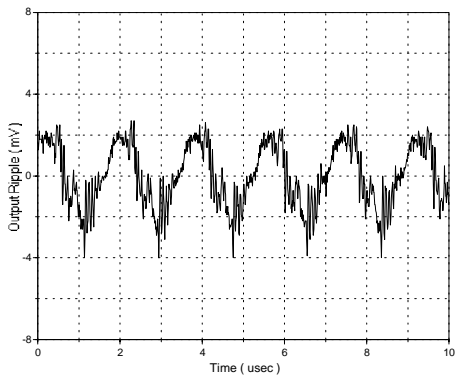


Input Ripple Current

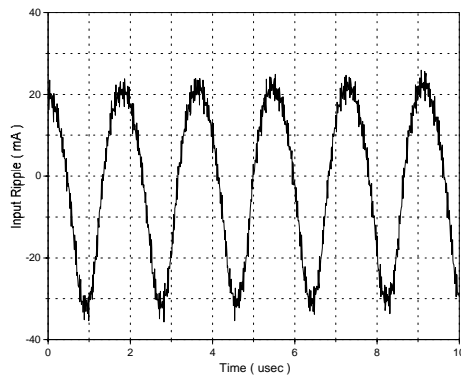

Output Load Transient Response
50% Load to/from 100% Load

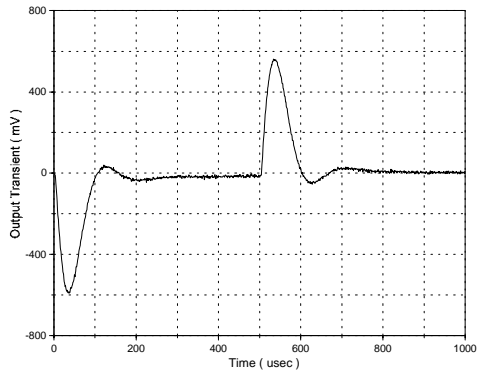


Output Load Transient Response
10% Load to/from 50% Load

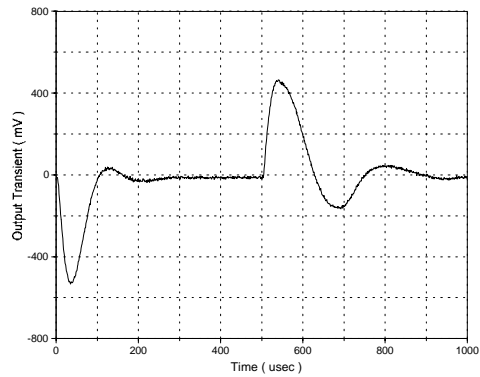


Typical Performance Characteristics - AFL27028S

Output Load = 100%, $V_{in} = 270VDC$ unless otherwise specified.


Turn-on Time, No Load

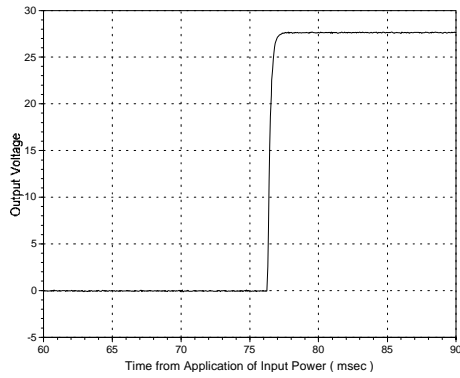


Turn-on Time, Full Load

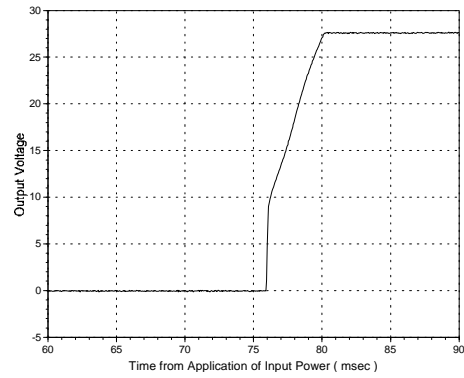


Output Ripple Voltage

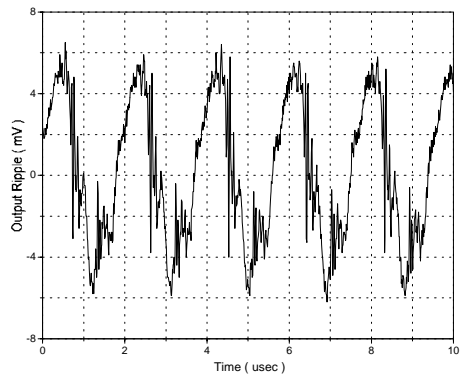


Input Ripple Current

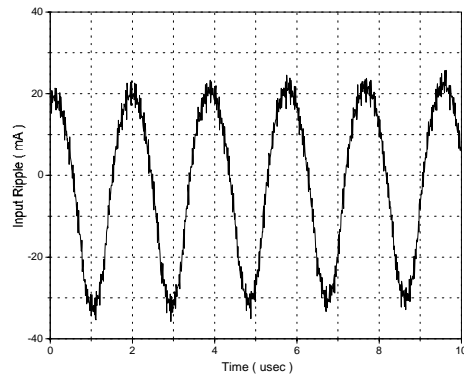

Output Load Transient Response
 50% Load to/from 100% Load

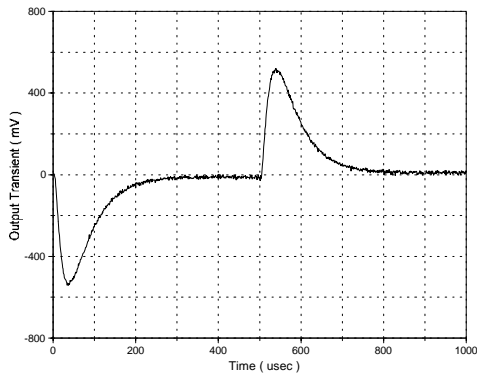

Output Load Transient Response
 10% Load to/from 50% Load

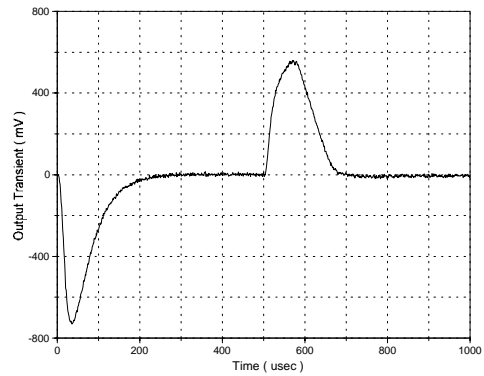

AFL270XXS Series

International
IRF Rectifier

AFL270XXS to Standard Military Drawing Equivalence Table

| | |
|-----------|------------|
| AFL27005S | 5962-94569 |
| AFL27006S | 5962-95534 |
| AFL27009S | 5962-95535 |
| AFL27012S | 5962-94753 |
| AFL27015S | 5962-94570 |
| AFL27028S | 5962-95565 |

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, Tel: (310) 322 3331
ADVANCED ANALOG: 2270 Martin Av., Santa Clara, California 95050, Tel: (408) 727-0500
Visit us at www.irf.com for sales contact information.
Data and specifications subject to change without notice. 04/02