

10BASE-T NETWORK COMPONENTS


960061B

- Designed for use with National Semiconductor DP83907 Atlantic II 10Base-T PHY transceiver
- Available in both surface mount and through-hole packaging
- Conforms to IEEE 802.3 10Base-T specifications
- 2000 Vrms isolation


ELECTRICALS AT 25°C

Part No.	Insertion Loss (dB) Max 1-10MHz	OCL (μH) Min TX/RX	Return Loss (dB) Min 5MHz-10MHz	Crosstalk (dB) Min 1MHz-10MHz	CM-CM Rej (dB) Min 10-30MHz 100MHz	Package Style
A553-5999-47	-1.0	50/200	-18	-40	-40 -30	1
S553-5999-87	-1.0	50/200	-18	-40	-40 -30	2

SCHEMATIC

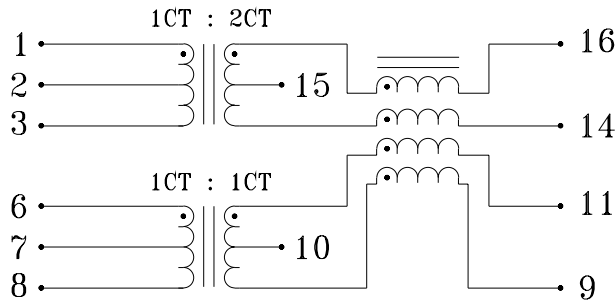

MECHANICALS

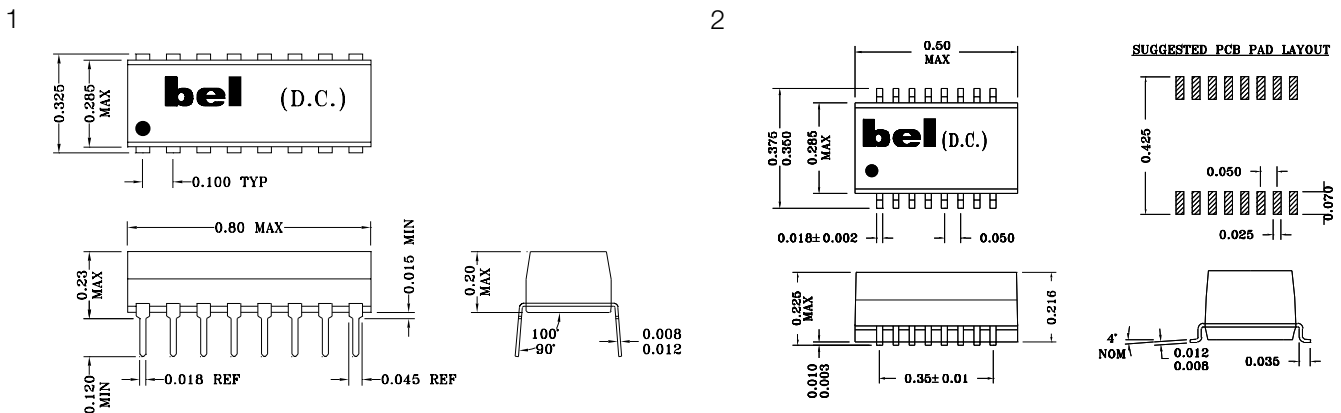


Specifications subject to change without notice.

10BASE-T NETWORK COMPONENTS

960061B

APPLICATION CIRCUIT

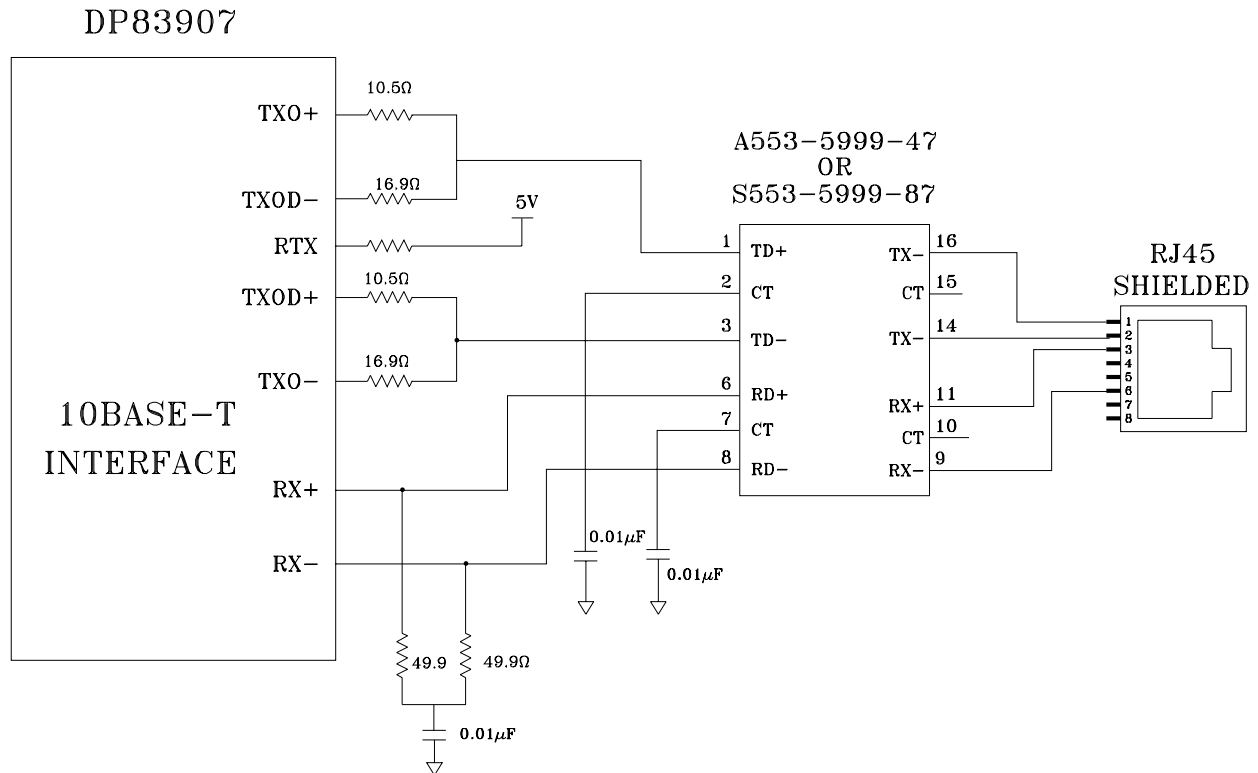

APPLICATION NOTES

- All of these part types have been designed to provide signal performance optimization, maximum noise reduction and minimum crosstalk interference. Careful board layout and grounding techniques are also critical to control jitter and signal reflections.
- Bel's low profile, surface mount packaging is ideal for high speed pick and place machinery. Parts can be shipped on tape and reel for high speed placement. Construction processes have been implemented for thermal compatibility with high temperature IR reflow assembly processing. Post dipping of leads assist with PC board solderability. Each part is optically inspected to meet rigid coplanarity requirements.

Corporate Office

Bel Fuse Inc.
 198 Van Vorst Street, Jersey City, NJ 07302-4496
 Tel: 201-432-0463
 Fax: 201-432-9542
 E-Mail: BelFuse@belfuse.com
 Internet: <http://www.belfuse.com>

Far East Office

Bel Fuse Ltd.
 8F/8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel: 852-2328-5515
 Fax: 852-2352-3706

European Office

Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Preston PR1 8UD
 Lancashire, U.K.
 Tel: 44-1772-556601
 Fax: 44-1772-888366