

0828 SERIES


The 0828 filters are excellent for suppressing noise from switching power supplies and other devices where a considerable amount of common mode and differential mode elect rical noise is present.


This series is available with both 6.3mm terminals or with the IEC inlet connector

LINE LOAD BLUE

BROWN
GRAYL

Operating Voltage = 115/250VAC
Operating Current = 1.5 amperes
Operating Frequency = 50/60 Hz
Operating Temperature = -10 to 50 deg. C
Dielectric Withstanding (Line-Ground) =
1500 VDC for 1 minute
Dielectric Withstanding (Line to Line) =
1500 VDC for 1 minutes
Leakage Current = 0.5 mA @ 250 VAC, 50Hz
Residual Voltage (Max after 5 sec.) = 25 Volts
Agency Approvals
UL, CSA, VDE

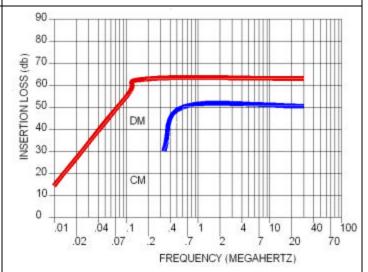

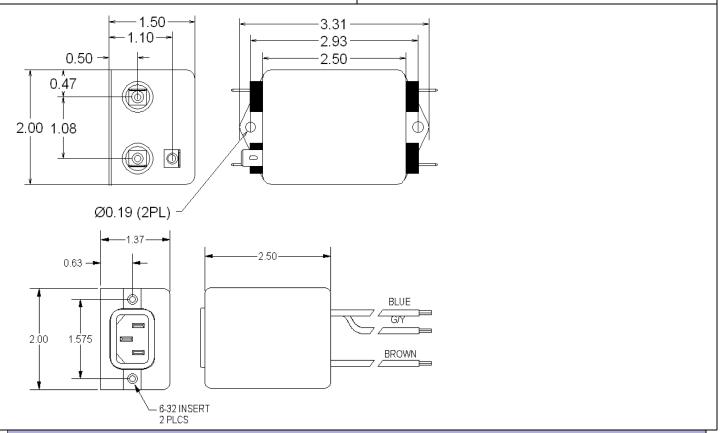

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115 email: info@jmkfilters.com

EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884