


NPN MPSA06  
PNP MPSA56

FEATURES

- \*Collector-Emitter Voltage:  $V_{CE0}=80V$
- \*Collector Dissipation:  $P_D=625mW$

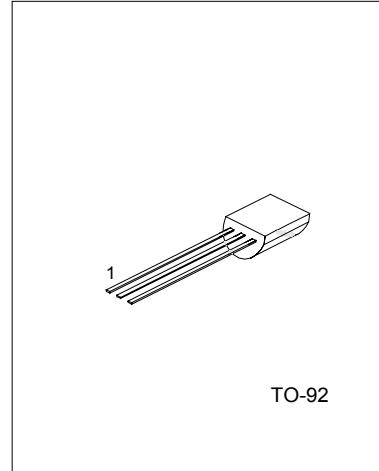

1: EMITTER 2: BASE 3: COLLECTOR

ABSOLUTE MAXIMUM RATINGS ( $T_A=25^{\circ}C$ , unless otherwise specified)

PARAMETER	SYMBOL	RATING	UNIT
Collector-base voltage	$V_{CB0}$	80	V
Collector-emitter voltage	$V_{CE0}$	80	V
Emitter-base voltage	$V_{EB0}$	4	V
Collector current - Continuous	$I_C$	500	mA
Total device dissipation, @ $T_A=25^{\circ}C$ Derate above $25^{\circ}C$	$P_D$	625 5	mW mW/ $^{\circ}C$
Total device dissipation, @ $T_C=25^{\circ}C$ Derate above $25^{\circ}C$	$P_D$	1500 12	mW mW/ $^{\circ}C$
Junction Temperature	$T_J$	-55 ~ +150	$^{\circ}C$
Storage Temperature	$T_{STG}$	-55 ~ +150	$^{\circ}C$

THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	MAX	UNIT
Thermal resistance, junction to ambient	$R_{\theta JA}$ (note)	200	$^{\circ}C/W$
Thermal resistance, junction to case	$R_{\theta JC}$	83.3	$^{\circ}C/W$

Note:  $R_{\theta JA}$  is measured with the device soldered into a typical printed circuit board.

ELECTRICAL CHARACTERISTICS ( $T_a=25^{\circ}C$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>OFF CHARACTERISTICS</b>						
Collector-emitter breakdown voltage (note 1)	$V_{(BR)CEO}$	$I_C=1.0mA, I_B=0$	80			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu A, I_C=0$	4			V
Collector cutoff current	$I_{CES}$	$V_{CE}=60V, I_B=0$			0.1	$\mu A$
Collector cutoff current	$I_{CBO}$	$V_{CB}=80V, I_E=0$			0.1	$\mu A$

# UTC MPSA06/56

# AMPLIFIER TRANSISTOR

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>ON CHARACTERISTICS</b>						
DC current gain	$h_{FE}$	$I_C=10\text{mA}, V_{CE}=1\text{V}$ $I_C=100\text{mA}, V_{CE}=1\text{V}$	100 100			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=100\text{mA}, I_B=10\text{mA}$			0.25	V
Base-emitter on voltage	$V_{BE(on)}$	$I_C=100\text{mA}, V_{CE}=1\text{V}$			1.2	V
<b>SMALL-SIGNAL CHARACTERISTICS</b>						
Current gain bandwidth product (note 2)	$f_T$	MPSA06: $I_C=10\text{mA}, V_{CE}=2\text{V}, f=100\text{MHz}$ MPSA56: $I_C=100\text{mA}, V_{CE}=1\text{V}, f=100\text{MHz}$	100 50			MHz MHz

Note 1: Pulse test:  $PW \leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$

Note 2:  $f_T$  is defined as the frequency at which  $|h_{fe}|$  extrapolates to unity.

## SWITCHING TIME TEST CIRCUITS

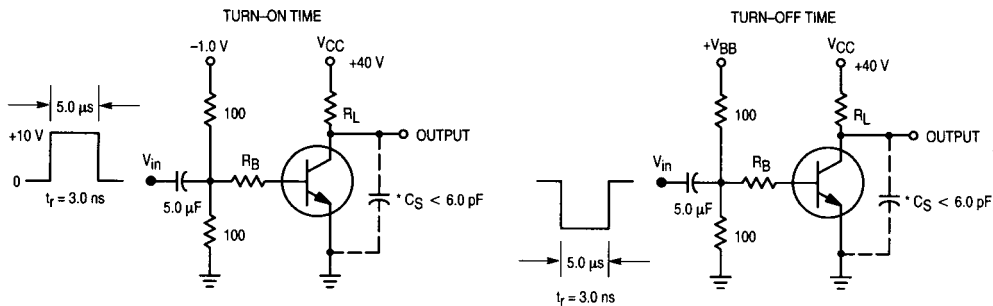


Figure 1

(Note: Total shunt capacitance of test jig and connectors for PNP test circuits, reverse all voltage polarities.)

## MPSA06

## MPSA56

## CURRENT-GAIN BANDWIDTH PRODUCT

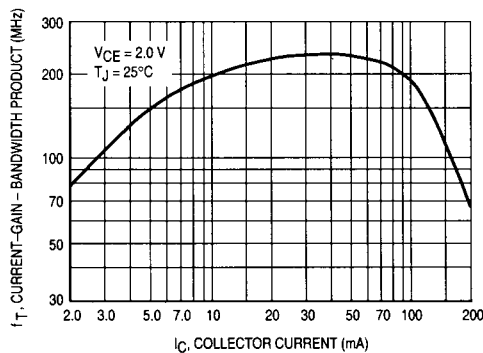


Figure 2

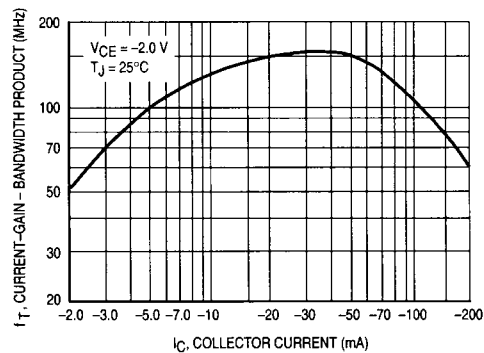


Figure 3

MPSA06

MPSA56

CAPACITANCE

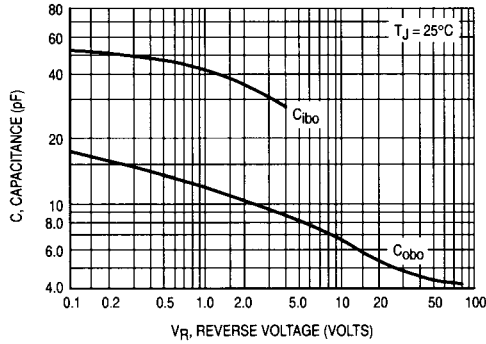


Figure 4

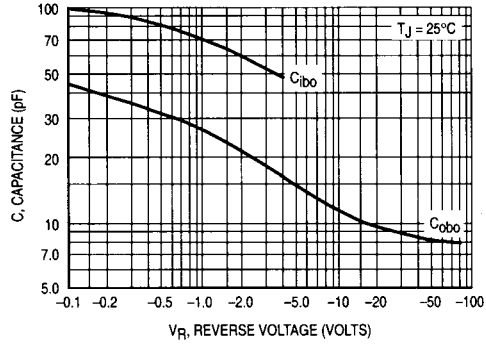


Figure 5

SWITCHING TIME

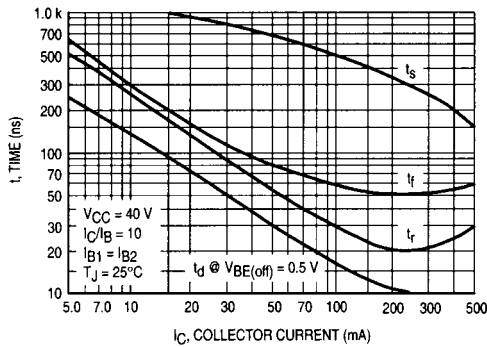


Figure 6

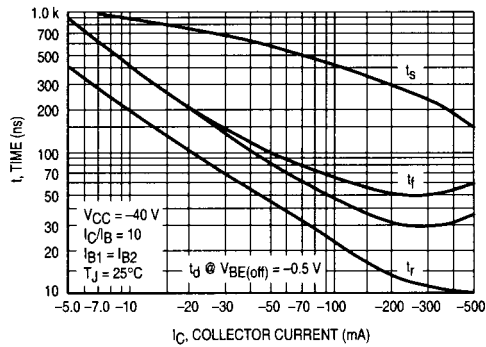


Figure 7

ACTIVE-REGION SAFE OPERATING AREA

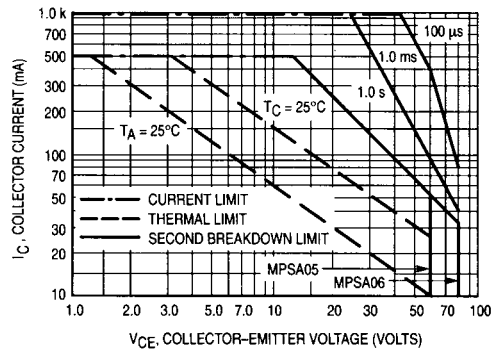


Figure 8

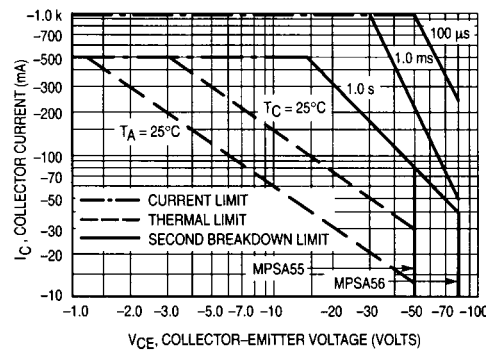


Figure 9

MPSA06

MPSA56

DC CURRENT GAIN

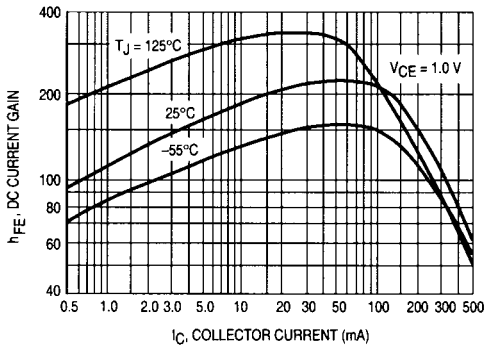


Figure 10

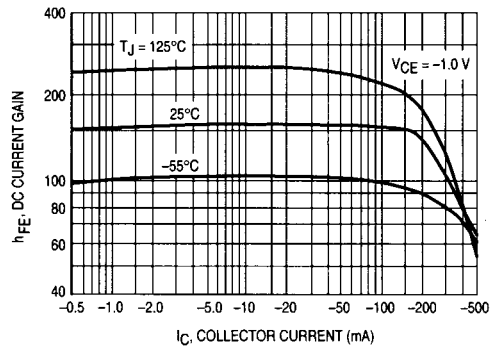


Figure 11

“ON” VOLTAGES

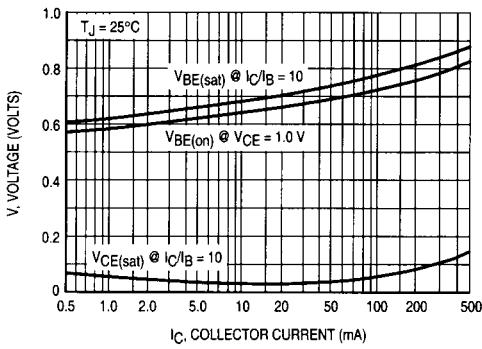


Figure 12

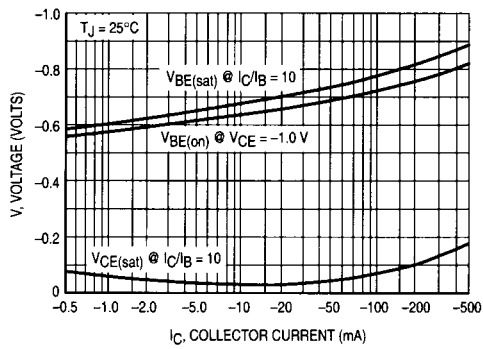


Figure 13

COLLECTOR SATURATION REGION

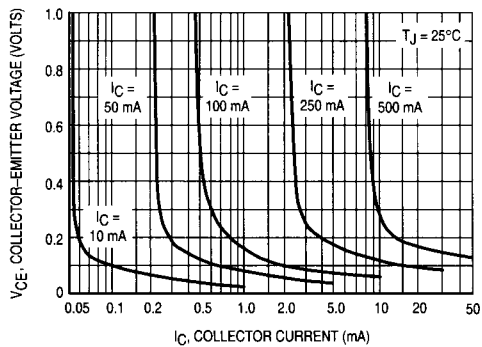


Figure 14

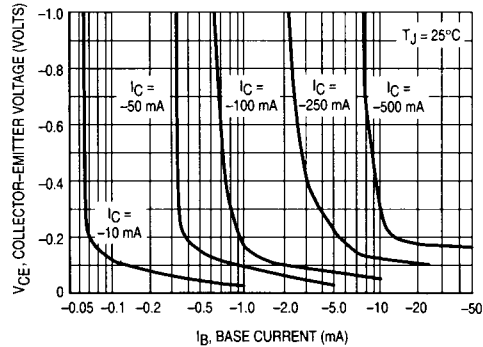


Figure 15

MPSA06

MPSA56

BASE-EMITTER TEMPERATURE COEFFICIENT

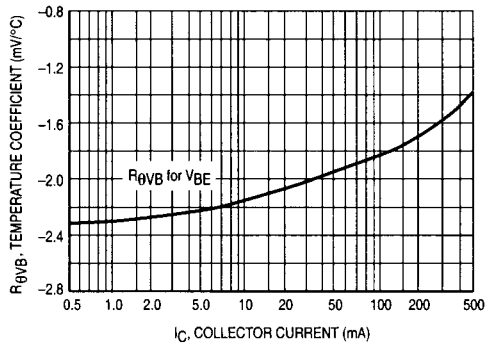


Figure 16

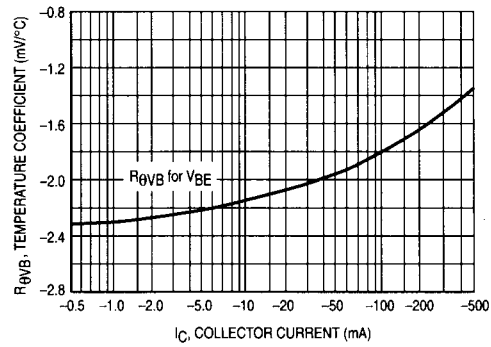


Figure 17

THERMAL RESPONSE

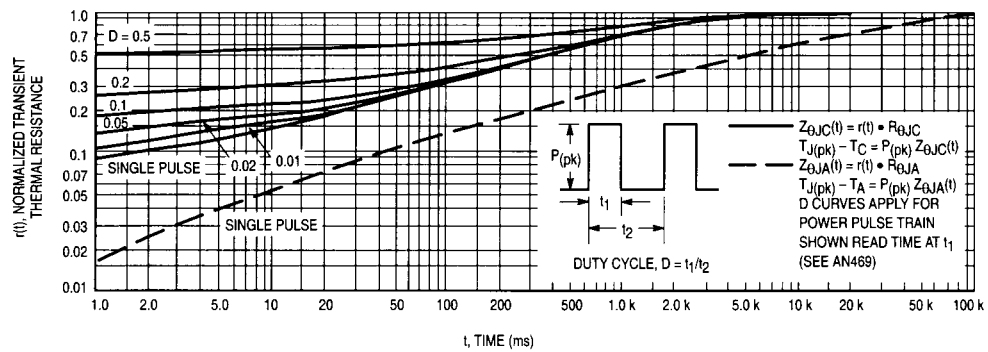


Figure 18

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.