



## Applications

- Guitar amplifiers
- Mixing consoles
- Amplifiers, CD players, karaoke volume controls
- Servo tracks

## PRM16 Series - 16 mm Motorized Potentiometer

**BOURNS®**

### How To Order

**P R M 1 6 2 - K 4 1 5 K - 1 0 3 B 3**

| MODEL DESIGNATOR |                               |
|------------------|-------------------------------|
| Code             | Description                   |
| PRM16            | 16 mm Motorized Potentiometer |

| NUMBER OF SECTIONS |              |
|--------------------|--------------|
| Code               | Description  |
| 2                  | Dual Section |

| TERMINAL CONFIG. (PIN LAYOUT) |                              |
|-------------------------------|------------------------------|
| Code                          | Description                  |
| K                             | PC Pins Vertical/Down Facing |

| DETENT OPTION |             |
|---------------|-------------|
| Code          | Description |
| 4             | No Detents  |




| STANDARD SHAFT LENGTH |             |
|-----------------------|-------------|
| Code                  | Description |
| 15                    | 15 mm       |
| 20                    | 20 mm       |
| 25                    | 25 mm       |
| 30                    | 30 mm       |

| SHAFT STYLE |                             |
|-------------|-----------------------------|
| Code        | Description                 |
| K           | Knurled (18 Tooth Serrated) |

| RESISTANCE TAPER (SEE TAPER CHARTS)   |  |
|---------------------------------------|--|
| Taper Series followed by Curve Number |  |

| RESISTANCE CODE |               |
|-----------------|---------------|
| Code            | Value in Ohms |
| 102             | 1,000         |
| 202             | 2,000         |
| 502             | 5,000         |
| 103             | 10,000        |
| 203             | 20,000        |
| 503             | 50,000        |
| 104             | 100,000       |
| 204             | 200,000       |
| 504             | 500,000       |
| 105             | 1,000,000     |

### Tapers

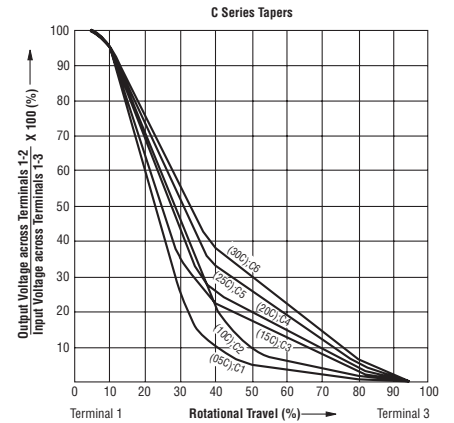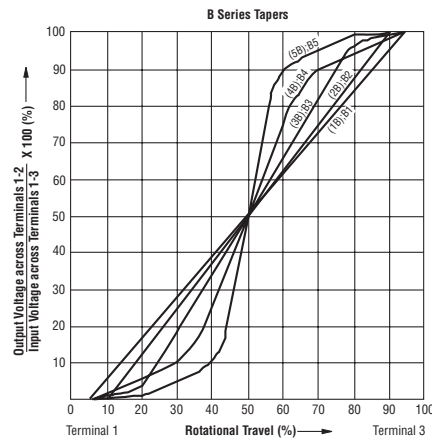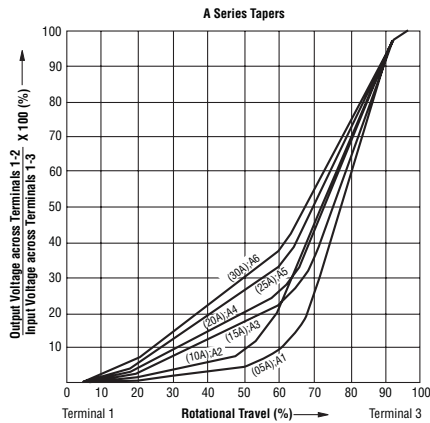

REV. 02/10

Specifications are subject to change without notice. Customers should verify actual device performance in their specific applications.