

# Technical Data Sheet High Power LED – 3W

#### **EHP-A18LS/CT01C-P03**

#### **Features**


- Feature of the device: small package with high efficiency
- Typical color temperature: 6500 K.
- Typical view angle: 120°.
- Typical light flux output:110 lm @ 700mA.
- ESD protection.
- Soldering methods: SMT.
- Grouping parameter: total luminous flux, color temperature.
- Typical optical efficiency: 46 lm/W.
- Thermal resistance (junction to lead): 9 K/W.
- The product itself will remain within RoHS compliant version



- TFT LCD display backlight
- Decorative and entertainment illumination
- Signal and symbol luminaries for orientation marker lights (e.g. steps, exit ways, etc.)
- Exterior and interior automotive illumination

#### **Materials**

Items	Description	
Housing black body	Heat resistant polymer	
Encapsulating Resin	Silicone resin	
Lens	Silicone	
Electrodes	Ag plating copper alloy	
Die attach	Eutetic film	
Chip	InGaN	




Page: 1 of 10

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1

### EHP-A18LS/CT01C-P03

#### **Dimensions**

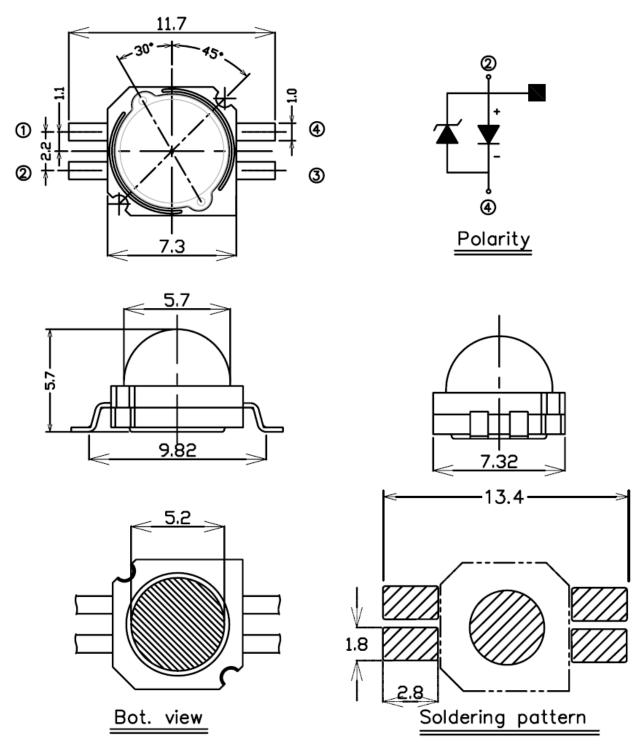

Notes: 1. Dimensions are in millimeters.

2. Tolerances unless dimensions ±0.25mm.

Rev. 1



### EHP-A18LS/CT01C-P03

Maximum Ratings (T Ambient=25°C)

Parameter	Symbol	Rating	Unit
Operating Temperature	T <sub>opr</sub>	-40 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +110	°C
Junction temperature	$T_j$	125	°C
Pulse Forward Current	I <sub>F</sub>	1000	mA
Power Dissipation	P <sub>d</sub>	4.0	w
Junction to heat-sink thermal resistance	R <sub>th</sub>	9	K/W

Electro-Optical Characteristics (T<sub>Ambient</sub>=25°C)

Parameter	Bin	Symbol	Min	Тур.	Max	Unit	Condition
Luminous Flux <sub>(1)</sub>	K4	$oldsymbol{\phi}_{v}$	85		100	lm	I <sub>F</sub> =700mA
	K5		100		130		
	N1		130		160		
	N2		160		200		
	V2		3.25		3.55	v	
Forward Voltage <sub>(2)</sub>	V3		3.55		3.85		
	V4		3.85		4.15		
	V5		4.15		4.45		
Viewing Angle <sub>(3)</sub>		2θ <sub>1/2</sub>		120		deg	
Color Temperature		ССТ	4500	6500	10000	K	

Note. 1. Luminous Flux measurement tolerance: ±10%

2. Forward Voltage measurement tolerance: ±0.1V


3.  $2\theta_{1/2}$  is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 3 of 10



### EHP-A18LS/CT01C-P03

#### **Cool-White Bin Structure**

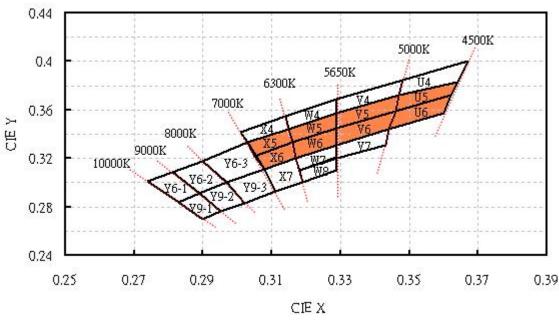

**Standard Specification** 

part number	CCT range(K)	Color bins	Brightness range(Im)	
EHP-A18LS/CT01C-P03/4556/Y/K4K5	4500-5650	V5 · V6 · U5 · U6	85-130	
EHP-A18LS/CT01C-P03/5670/Y/K4K5	5650-7000	X5 · X6 · W5 · W6	85-130	
EHP-A18LS/CT01C-P03/4556/Y/N1N2	4500-5650	V5 · V6 · U5 · U6	130-200	
EHP-A18LS/CT01C-P03/5670/Y/N1N2	5650-7000	X5 · X6 · W5 · W6	130-200	

Everlight Electronics Co., Ltd.

http://www.everlight.com Prepared date: Oct. 15, 2008 Rev. 1

Page: 4 of 10


Prepared by: Brady Chou




### EHP-A18LS/CT01C-P03

#### **Typical Electro-Optical Characteristics Curves**


Relative Spectral Distribution, I<sub>F</sub>=700mA, T<sub>Ambient</sub>=25°C

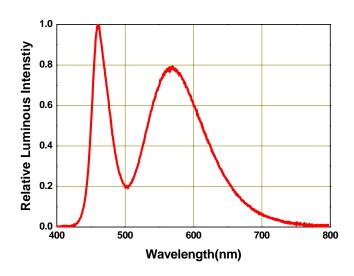


Forward Voltage vs Forward Current, *T*<sub>Ambient</sub>=25°C

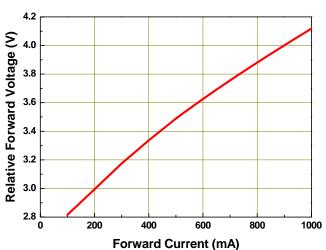

Relative Luminous Intensity vs Forward Current,  $T_{Ambient}$ =25°C

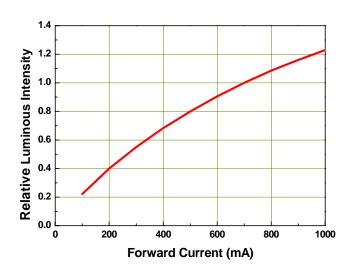


Forward Current Derating Curve, Derating based on T<sub>imax</sub>=125°C

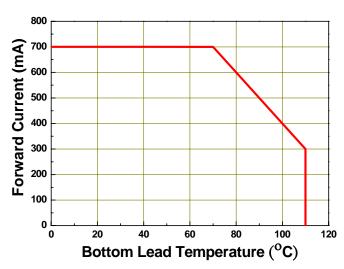



### **EHP-A18LS/CT01C-P03**

#### **Typical Representative Spatial Radiation Pattern**

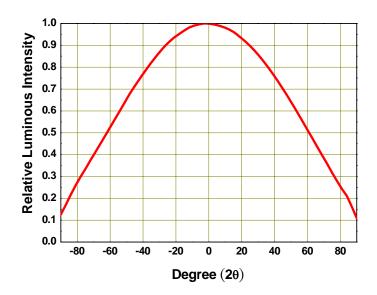

Prepared date: Oct. 15, 2008

Rev. 1

Page: 6 of 10

Prepared by: Brady Chou



#### EHP-A18LS/CT01C-P03

#### Label explanation

**CPN: Customer's Production Number** 

P/N: Production Number QTY: Packing Quantity CAT: Luminous Ranks

**HUE: Dominant Wavelength** 

**REF: Reference** 


**LOT No: Lot Number** 


**MADE IN TAIWAN: Production Place** 




#### **Tube Packing Specifications**

#### 1. Tube





#### 3. Outside Carton

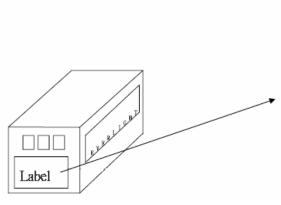



2. Inner Carton

- Packing Quantity
  - 1. 65 Pcs / Per Tube
  - 2. 20 Tubes / Inner Carton
  - 3. 12 Inner Cartons / Outside Carton

Everlight Electronics Co., Ltd.

http://www.everlight.com

Prepared date: Oct. 15, 2008

Rev. 1

Page: 7 of 10

Prepared by: Brady Chou



### EHP-A18LS/CT01C-P03

**Reliability Test Items and Results** 

Stress Test	Stress Condition	Stress Duration	
Solderability	Tsol=230°C, 5sec	1 times	
Reflow	Tsol=260°C, 10sec, 6min	3 times	
Thermal Shock	$H:+110^{\mathbb{C}}$ 20min. ' $J$ 10sec. ' $L:-$ 40 $^{\mathbb{C}}$ 20min.	500 Cycles	
Temperature Cycle	$H: +100 ^\circ \!$	1000 Cycles	
High Temperature/Humidity Reverse Bias	Ta=85℃ , RH=85%	1000hours	
High Temperature/Humidity Operation	Ta=85℃ , RH=60%, IF=320mA	1000hours	
High Temperature Storage	Ta=110°C	1000hours	
Low Temperature Storage	Ta=-40°C	1000hours	
Intermittent operational Life	Ta=25°C , IF=1000mA 30mS on/ 2500mS off	1000hours	
High Temperature Operation Life #1	Ta=55℃, IF=600mA	1000hours	
High Temperature Operation Life #2	Ta=85℃, IF=320mA	1000hours	
High Temperature Operation Life #3	Ta=100℃, IF=225mA	1000hours	
Low Temperature Operation Life	Ta=-40°ℂ , IF=700mA	1000hours	
Power Temperature Cycle	$H: +85^\circ\mathbb{C}$ 15min. ' $J$ 5min. ' $L: -40^\circ\mathbb{C}$ 15min. IF=320mA,2min on/off	1000cycles	
ESD Human Body Model	2000V, Interval:0.5sec	3 times	
ESD Machine Model	200V, Interval:0.5sec	3 times	

\*Im: BRIGHTNESS ATTENUATE DIFFERENCE(1000hrs) < 50%

\*VF: FORWARD VOLTAGE DIFFERENCE < 20%

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 8 of 10



#### EHP-A18LS/CT01C-P03

#### **Precautions For Use**

#### 1. Over-current-proof

Though EHP-A18 has conducted ESD protection mechanism, customer must not use the device in reverse and should apply resistors for extra protection. Otherwise slight voltage shift may cause enormous current change and burn out failure would happen.


#### 2. Storage

- i. Do not open moisture proof bag before the products are ready to use.
- ii. Before opening the package, the LEDs should be kept at 30℃ or less and 90%RH or less.
- iii. The LEDs should be used within a year.
- iv. After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.
- v. The LEDs should be used within 168 hours (7 days) after opening the package.
- vi. If the moisture absorbent material (silicone gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
- vii. Pre-curing treatment : 60±5°C for 24 hours.

#### 3. Thermal Management

i. For maintaining the high flux output and achieving reliability, EHP-A18 series LED package should be mounted on a metal core printed circuit board (MCPCB) with proper thermal connection to dissipate approximately 3W of thermal energy under 700mA operation.

### MCPCB structure

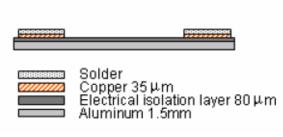

#### Recommend:

$$Max T_{Slug} = 70^{\circ}C$$

- ii. Special thermal designs are also recommended to take in outer heat sink design, such as FR4
   PCB on Aluminum with thermal vias or FPC on Aluminum with thermal conductive adhesive, etc.
- iii. Sufficient thermal management must be conducted, or the die junction temperature will be over the limit under large electronic driving and LED lifetime will decrease critically.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 9 of 10



#### EHP-A18LS/CT01C-P03

#### 4. Soldering Condition

i. Lead reflow soldering temperature profile

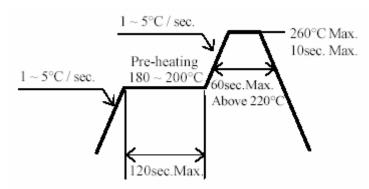

- ii. Reflow soldering should not be done more than two times.
- iii. While soldering, do not put stress on the LEDs during heating.
- iv. After soldering, do not warp the circuit board

#### 5. Soldering Iron

- i. For prototype builds or small series production runs it is possible to place and solder the LED by hand.
- ii. Dispensing thermal conductive glue or grease on the substrates and follow its curing spec. Press LED housing to closely connect LED and substrate.
- iii. It is recommended to hand solder the leads with a solder tip temperature of 280°C for less than 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal.
- iv. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 10 of 10