

## S.Q. TUBE

Special quality double triode designed for

Cascode circuits

H. F. or I. F. amplifiers

Mixer or phase inverter stages

Multivibrator and cathode follower in computers


### QUICK REFERENCE DATA

Life	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect	
	A. C. or D. C. ; parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	300 mA
Anode current	$I_a$	15 mA
Mutual conductance	$S$	12.5 mA/V
Equivalent noise resistance	$R_{eq}$	300 $\Omega$
Noise factor ( $f = 200$ MHz)	$F$	4.6 dB

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

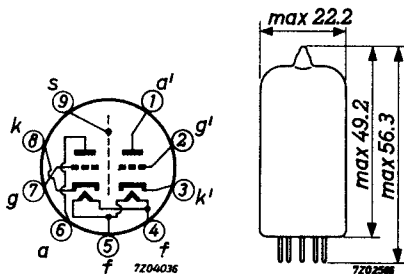

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	300	285 - 315		mA
Anode supply voltage	$V_{ba}$	100			V
Grid supply voltage	$+V_{bg}$	9			V
Cathode resistor	$R_k$	680			$\Omega$
Anode current	$I_a$	15	14.2 - 15.8	min. 13.5	mA
Mutual conductance	S	12.5	10.5 - 15	min. 9	mA/V
Amplification factor	$\mu$	33			
<u>Equivalent noise resistance</u>	$R_{eq}$	300			$\Omega$
Frequency = 45 MHz					
<u>Noise figure</u>	F	4.6			dB
Frequency = 200 MHz					
In cascode circuit adapted to minimum noise					
<u>Input resistance</u>	$r_g$	3			$k\Omega$
Frequency = 100 MHz					
<u>Start of grid current</u>	$V_g$	0.75			$V_{RMS}$
<u>Negative grid current</u>	$-I_g$		max. 0.1	max. 1	$\mu A$
Anode voltage	$V_a$	90			V
Anode current	$I_a$	15			mA
Anode supply voltage	$V_{ba}$	90			V
Cathode resistor	$R_k$	120			$\Omega$
Anode current	$I_a$	12			mA
Mutual conductance	S	11.5			mA/V

## CHARACTERISTICS (continued)

		I	II	III	
<u>Cut-off voltage</u>	$-V_g$	6.5	5 - 8.5		V
Anode voltage	$V_a$	150			V
Anode current	$I_a$	0.1			mA
<u>Difference in grid voltage</u> of two sections	$ V_g - V_g' $		max. 2	max. 2	V
Anode voltage	$V_a = V_a'$	150			V
Anode current	$I_a = I_a'$	0.1			mA
Anode supply voltage	$V_{ba}$	150			V
Negative grid voltage	$-V_g$	15			V
Anode current	$I_a$		max. 5		$\mu A$
<u>In circuit fig.1 "pag.7"</u>					
Anode supply voltage	$V_{ba}$	150			V
Anode current (not permitted continuously)	$I_a$	33	28 - 38		mA
Anode supply voltage	$V_{ba}$	60			V
Anode current	$I_a$		max. 9		mA
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 6	max. 12	$\mu A$
Voltage between cathode and heater = 90 V, cath.neg. Voltage between cathode and heater = 120 V, cath.pos.					
<u>Insulation resistance between two electrodes</u>	$R_{ins}$		min.100	min. 20	$M\Omega$
Voltage between electrodes = 200 V					
<u>Hum voltage</u>	$V_g$		max. 50		$\mu V_{RMS}$
Centre heater transformer earthed					
Grid resistor $R_g = 0.5 M\Omega$					

**CAPACITANCES** Both sections if applicable

		I	II	
Anode to cathode, heater and screen	$C_{a/kfs}$	1.75	1.55 - 1.95	pF
	$C_{a'/k'fs}$	1.65	1.45 - 1.85	pF
Anode to cathode and heater	$C_{a/kf}$	0.5	0.4 - 0.6	pF
	$C_{a'/k'f}$	0.4	0.3 - 0.5	pF
Grid to cathode, heater and screen	$C_{g/kfs}$	3.3	2.7 - 3.9	pF
Grid to cathode and heater	$C_{g/kf}$	3.3	2.7 - 3.9	pF
Anode to grid	$C_{ag}$	1.4	1.2 - 1.6	pF
Anode to cathode	$C_{ak}$	0.18	0.14 - 0.22	pF
Cathode to heater	$C_{kf}$	2.6		pF
	$C_{k'f}$	2.7		pF
Anode to screen	$C_{as}$	1.3	1.1 - 1.5	pF
Anode to grid, heater and screen	$C_{a/gfs}$	3.0	2.7 - 3.3	pF
	$C_{a'/g'fs}$	2.9	2.6 - 3.2	pF
Cathode to grid, heater and screen	$C_{k/gfs}$	6.0	5.1 - 6.9	pF
Anode to anode other section	$C_{aa'}$		max. 0.045	pF
Grid to grid other section	$C_{gg'}$		max. 0.005	pF
Anode to grid other section	$C_{ag'}, C_{a'g}$		max. 0.005	pF
Grid to cathode other section	$C_{gk'}, C_{g'k}$		max. 0.005	pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) during 10 000 hours under the following conditions:

Anode supply voltage	$V_{ba}$	100 V
Grid supply voltage	$+V_{bg}$	9 V
Cathode resistor	$R_k$	680 $\Omega$
Grid resistor	$R_g$	47 $k\Omega$
Voltage between cathode and heater (cath.neg.)	$V_{kf}$	60 V
Anode current	$I_a$	15 mA

**LIMITING VALUES** Design centre rating system

Anode voltage	$V_{a0}$	max.	550 V
Anode voltage (Zero cathode current)	$V_a$	max.	400 V
Anode voltage	$V_a$	max.	220 V
Anode voltage (Max. anode dissipation 0.8 W)	$V_a$	max.	250 V
Anode dissipation	$W_a$	max.	1.5 W
Anode dissipation (Max. anode dissipation of section 1 plus section 2 = 2 W)	$W_a$	max.	1.8 W
Grid dissipation	$W_g$	max.	30 mW
Grid voltage	$-V_g$	max.	100 V
Grid peak voltage Max. pulse duration 200 $\mu$ sec Max. duty factor 0.1	$-V_{gp}$	max.	200 V
Cathode current	$I_k$	max.	20 mA
Cathode peak current Max. pulse duration 200 $\mu$ sec Max. duty factor 0.1	$I_{kp}$	max.	100 mA

**LIMITING VALUES** (continued)

Voltage between cathode and heater

Cathode positive	$V_{kf}$	max.	150	V
Cathode negative	$V_{kf}$	max.	100	V
Bulb temperature (Absolute max.)	$t_{bulb}$	max.	170	°C
Grid resistor (Anode current < 5 mA)	$R_g$	max.	1	MΩ

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

**OPERATING CHARACTERISTICS**

Output tube class A

Anode voltage	$V_a$	220	V
Load resistance	$R_{a\sim}$	20	kΩ
Grid voltage	$-V_g$	6.5	V
Input voltage	$V_i$	0 1.5 4.5	V <sub>RMS</sub>
Anode current	$I_a$	6.5 9.2	mA
Output power	$W_o$	0.05 0.5	W
Total distortion	$d_{tot}$	7	%

Output tube class B (two tubes)

Continuous single tone input signal

Anode voltage	$V_a$	200	V
Load resistance	$R_{aa\sim}$	22	kΩ
Grid voltage	$-V_g$	6	V
Input voltage	$V_i$	0 0.9 4.0	V <sub>RMS</sub>
Anode current	$I_a$	2x5 2x9	mA
Output power	$W_o$	0.05 1.2	W
Total distortion	$d_{tot}$	3	%

**OPERATING CHARACTERISTICS** (continued)

Output tube class B (two tubes)

Speech and music inputsignal

Anode voltage	$V_a$	200	V
Load resistance	$R_{a-a\sim}$	10	$k\Omega$
Grid voltage	$-V_{g1}$	6	V
Input voltage	$V_i$	0 0.9 4.0	$V_{RMS}$
Anode current	$I_a$	2x5 2x13.5	mA
Output power	$W_o$	0.05 1.5	W
Total distortion	$d_{tot}$		4 %

Mixer

Anode supply voltage	$V_{ba}$	60 90 150	V
Anode resistor	$R_a$	0 1 3.9	$k\Omega$
Grid resistor	$R_g$	1 1 1	$M\Omega$
Oscillator voltage	$V_{osc}$	2 2.5 3	$V_{RMS}$
Anode current	$I_a$	4.7 7.7 11	mA
Conversion conductance	$S_c$	2.9 3.5 4.1	mA/V
Internal resistance	$R_i$	8.3 7 6.1	$k\Omega$










Fig.1

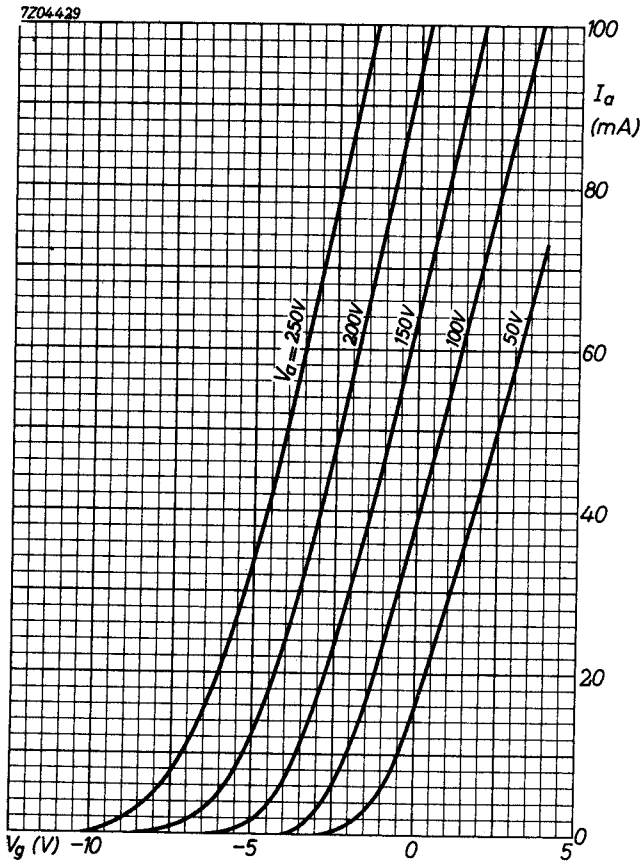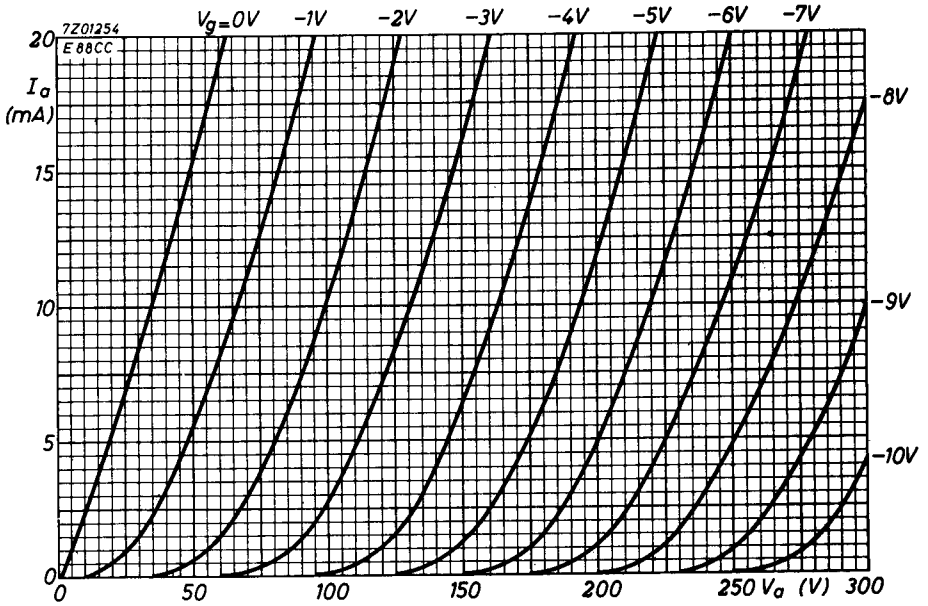

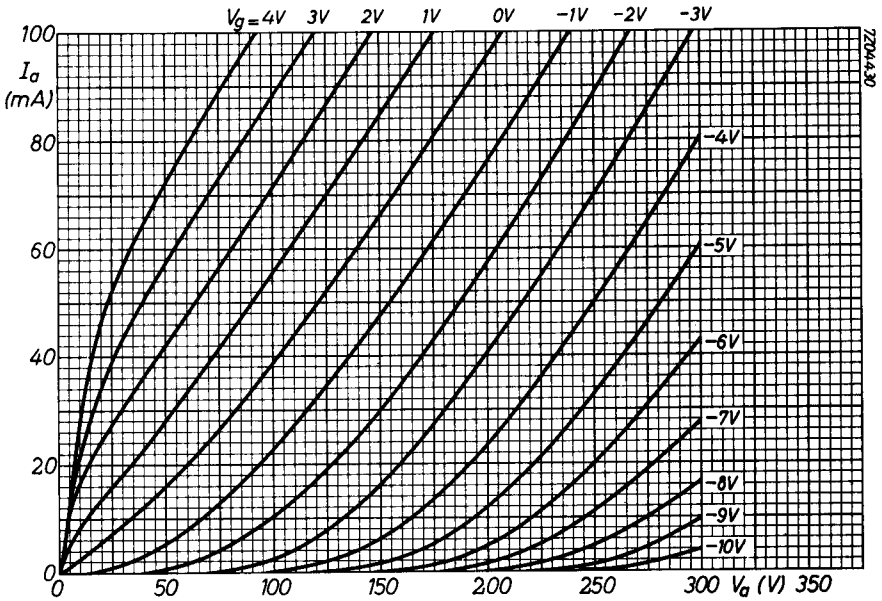


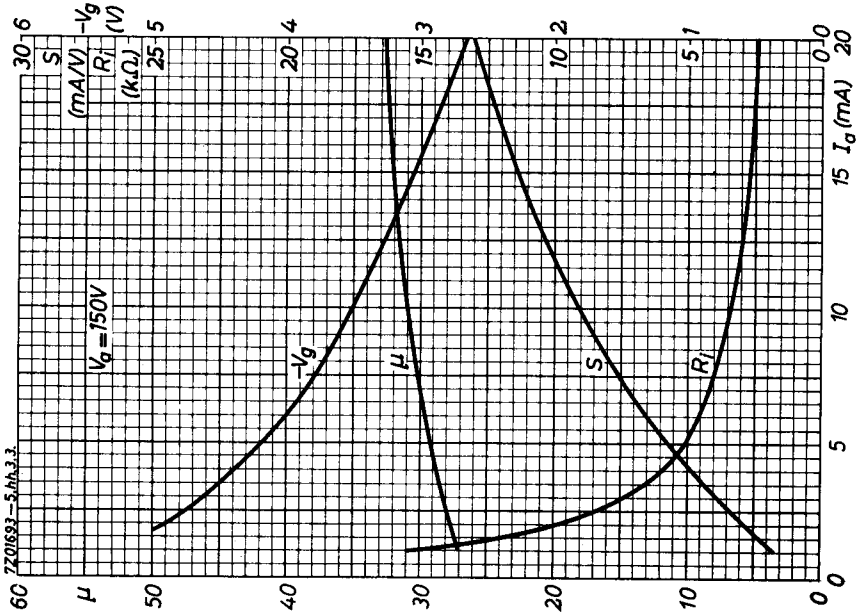

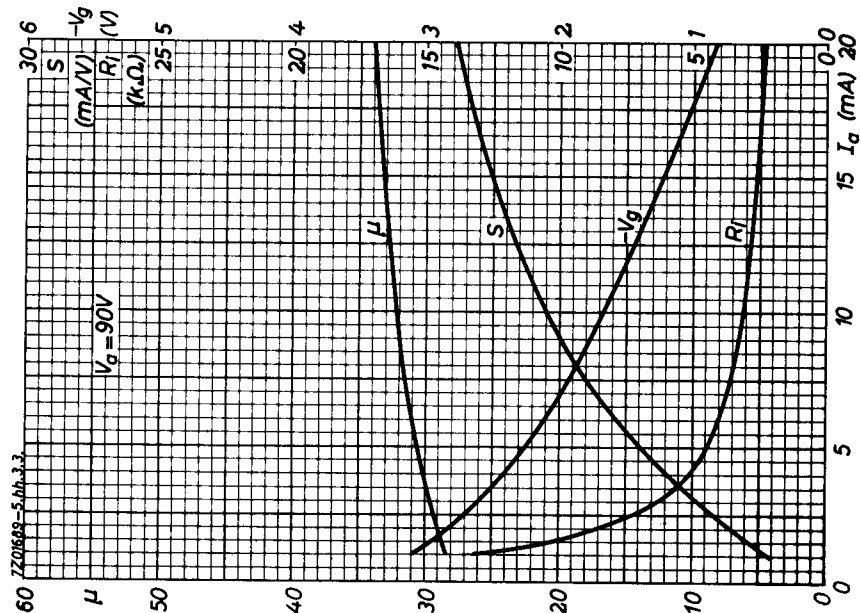

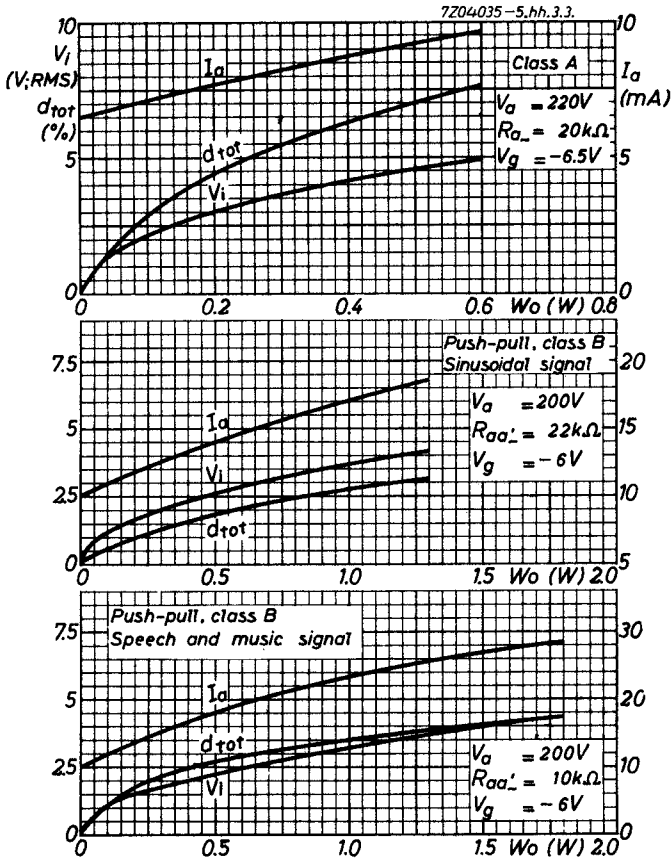

7204-034-5.hh.3.3

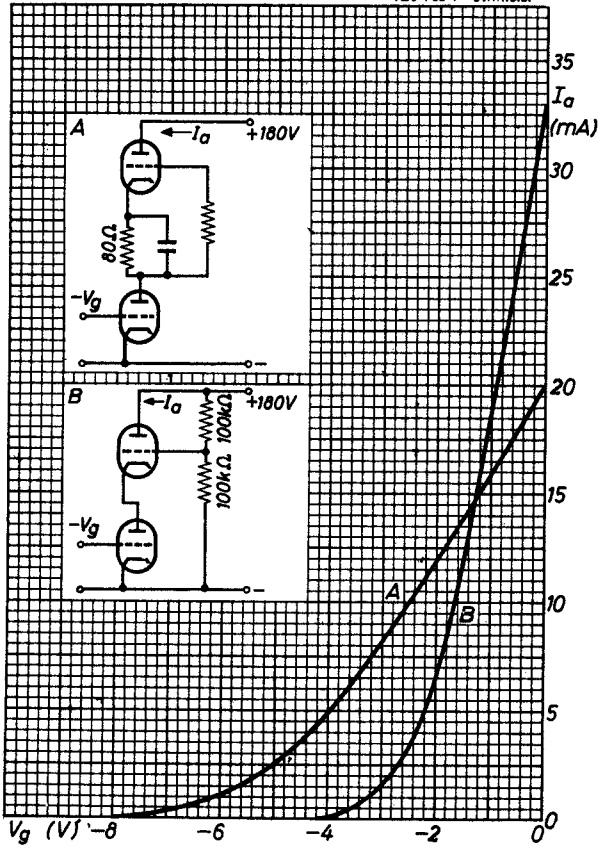

# PHILIPS

Data handbook



Electronic  
components  
and materials

## E88CC

<b>page</b>	<b>sheet</b>	<b>date</b>
1	1	1968.12
2	2	1968.12
3	3	1968.12
4	4	1968.12
5	5	1968.12
6	6	1968.12
7	7	1968.12
8	8	1968.12
9	9	1968.12
10	10	1968.12
11	11	1968.12
12	12	1968.12
13	FP	2000.11.24