





SMT POWER INDUCTORS

Power Beads - PA2202.XXXNL Series



-  **Current Rating:** Over 75Apk
-  **Inductance Range:** 120nH to 360nH
-  **Height:** 6.0mm Max
-  **Footprint:** 12.1mm x 10.0mm Max

Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C⁷

Part Number	Inductance @0Abc (nH ±15%)	Inductance @Irated (nH TYP)	Irated ¹ (Abc)	DCR ² (mΩ)	Saturation Current ³ (A TYP)		Heating Current ⁴ (A TYP)
					25°C	100°C	
PA2202.121NL	120	120	36	0.48 ± 6.5%	84	75	36
PA2202.181NL	180	180	36		64	52	
PA2202.211NL	215	215	36		53	47	
PA2202.231NL	230	230	36		47	44	
PA2202.321NL	325	282	31		34	31	
PA2202.361NL	365	315	27		30	27	

NOTES:



- The rated current as listed is either the saturation current or the heating current depending on which value is lower.
- The nominal DCR is measured from point (a) to point (b), as shown below on the mechanical drawing.
- The saturation current is the typical current which causes the inductance to drop by 20% at the stated ambient temperatures (25°C and 100°C). This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- The heating current is the DC current which causes the part temperature to increase by approximately 40°C. This current is determined by solder-

ing the component on a typical application PCB, and then applying the current to the device for 30 minutes.



- In high volt*time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. To determine the approximate total losses (or temperature rise) for a given application, the coreloss and temperature rise curves can be used.
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA2202.121NL becomes PA2202.121NLT). Pulse complies to industry standard tape and reel specification EIA481.
- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.

Mechanical

Schematic

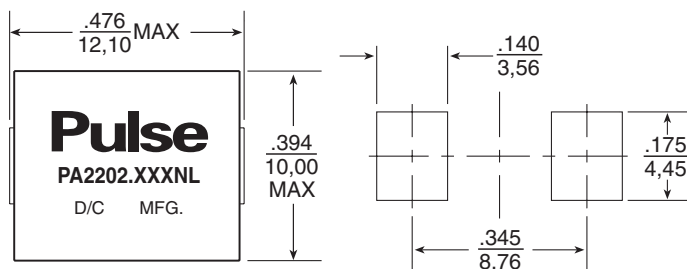

SUGGESTED PAD LAYOUT

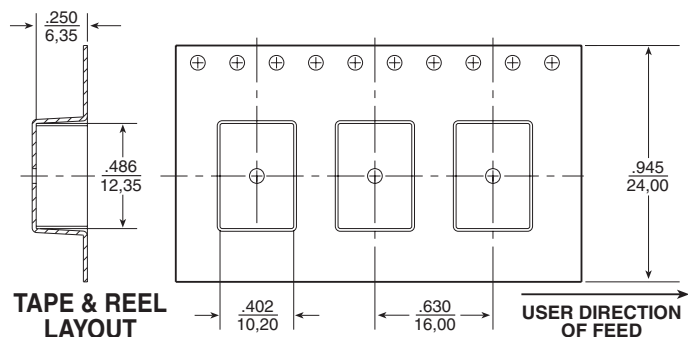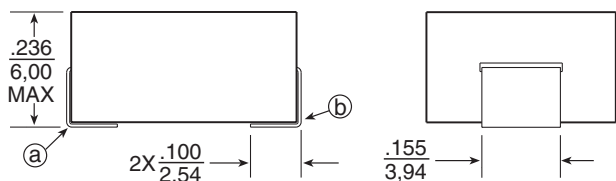

Weight27 grams
Tape & Reel600/reel


Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are ± .010
0,25

SMT POWER INDUCTORS


Power Beads - PA2202.XXXNL Series




Typical Inducance vs DC Bias @ 25°C

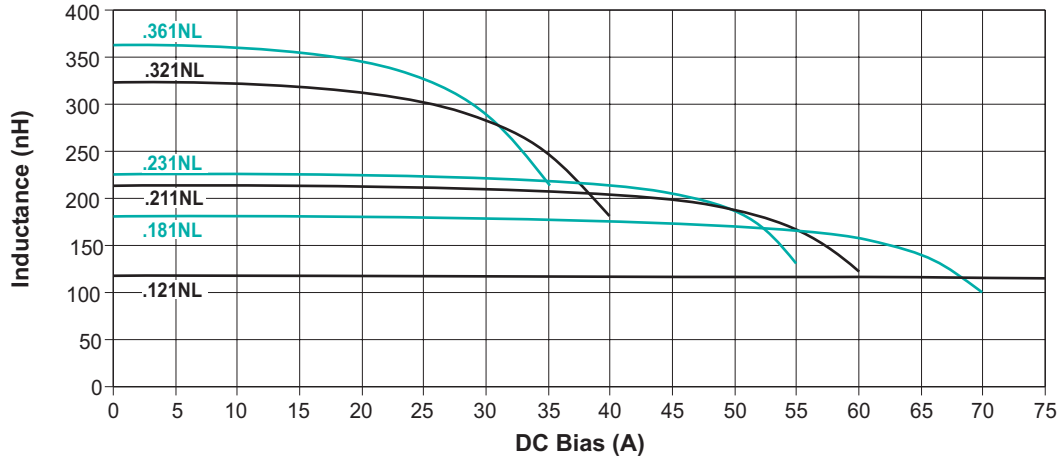


Typical Inducance vs DC Bias @ 100°C

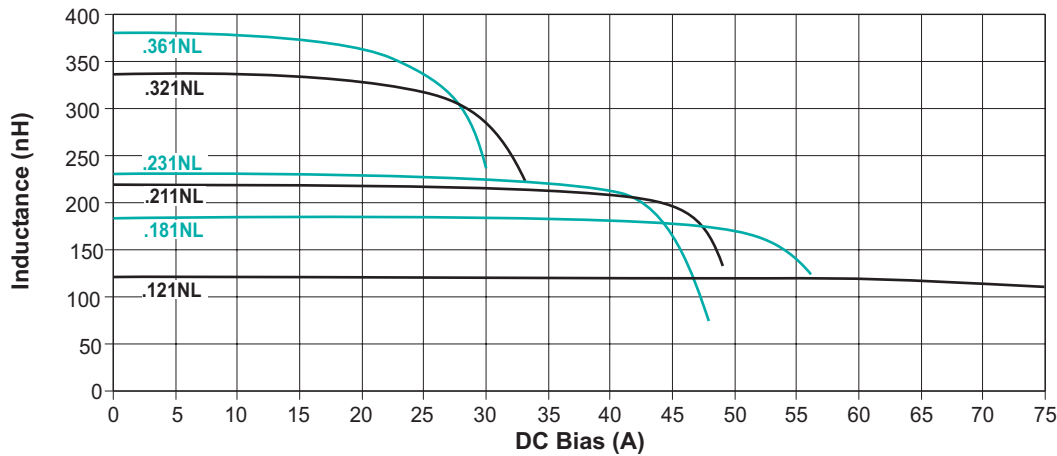

CoreLoss (W)

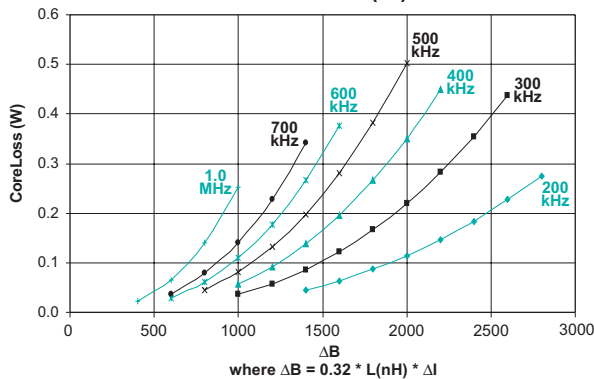

Temp Rise vs Power Dissipation

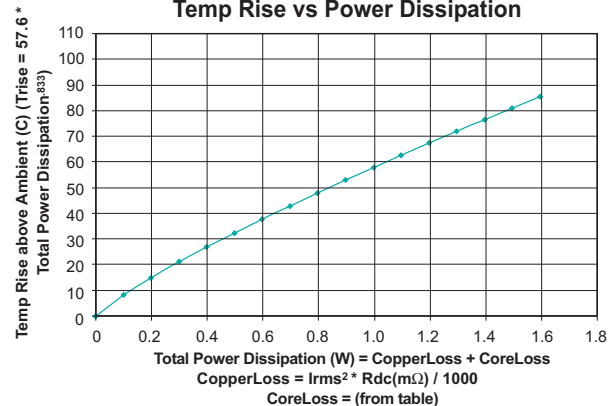

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

www.pulseeng.com

Tel: 858 674 8100

Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 7806 0

Fax: 49 7032 7806 12

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Building
10th Kejinan Rd.
High-Tech Zone
Nanshan District, Shenzhen
P.R. China 518057

Tel: 86 755 33966678

Fax: 86 755 33966700

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

Tel: 86 21 32181071

Fax: 86 21 32181396

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324

Tel: 65 6287 8998

Fax: 65 6280 0080

Pulse North Asia

No. 26
Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.
32667

Tel: 886 3 4643715

Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2008. Pulse Engineering, Inc. All rights reserved.