

AN8064SP

Low Drop-out Voltage Regulator


Overview

The AN8064SP is a voltage regulator IC with strobe pin capable of switching the output ON/OFF.

Its rated load current is 150mA and output voltage is 4V fixed.


Features

- 150mA rated load current and 4V fixed output voltage
- Capable of turning off output by setting the strobe pin to the "L" level
- Minimum input/output voltage difference : typ. 0.25V
- Built-in overcurrent protective circuit
- Surface-mount type 5-pin SIL plastic package

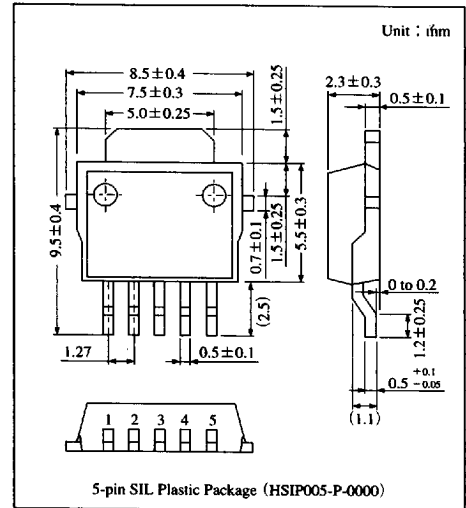

Voltage
Regu-
lators

Block Diagram

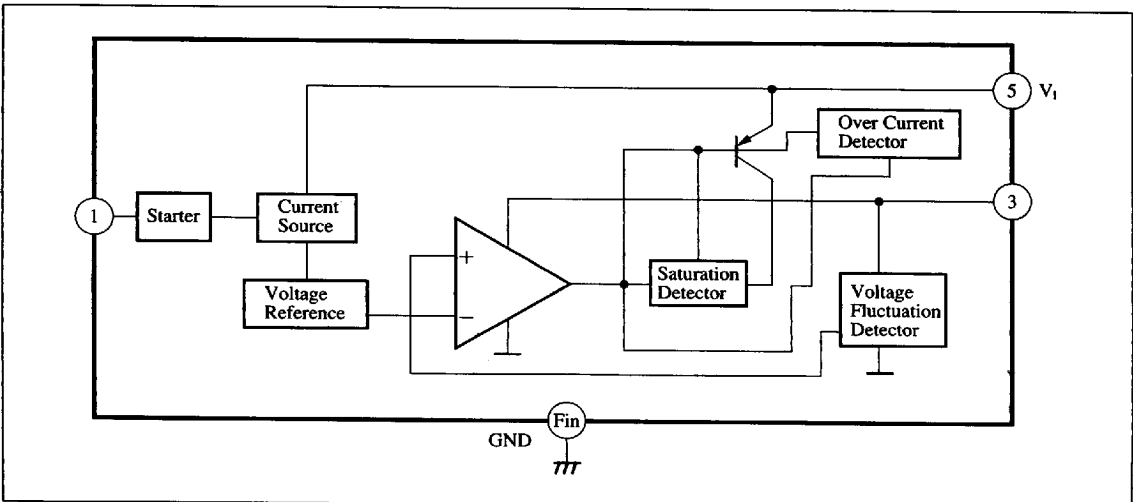

■ 6932852 0012760 45T ■

Panasonic

465


■ Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Rating	Unit
Supply voltage	V_I	14.4	V
Power dissipation	P_D	500	mW
Operating ambient temperature	T_{opr}	-20 to +75	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +125	$^\circ\text{C}$

■ Electrical Characteristics ($T_a=25^\circ\text{C}$)


Parameter	Symbol	Condition	min	typ	max	Unit
Output voltage	V_O	$V_I=12\text{V}, I_O=150\text{mA}$	3.84	4	4.16	V
Output voltage range	V_I	$V_I=5$ to $14.4\text{V}, I_O=0$ to 150mA	3.76	4	4.24	V
Bias current at no load	I_{bias}	$V_I=11\text{V}, I_O=0\text{mA}$	—	2.9	4	mA
Load regulation	REG_L	$V_I=11\text{V}, I_O=0$ to 150mA	—	—	100	mV
Line regulation	REG_{IN}	$V_I=5$ to $13\text{V}, I_O=150\text{mA}$	—	—	100	mV
Minimum input/output voltage difference	$V_{DIF(min)}$	$V_I=3.5\text{V}, I_O=150\text{mA}$	—	—	0.6	V
Rush current	I_{rush}	$V_I=3.5\text{V}, I_O=0\text{mA}$	—	2.5	—	mA
Output short-circuit current	$I_{O(short)}$	$V_I=11\text{V}$	350	—	550	mA
Load bias current fluctuation	ΔI_{bias}	$V_I=11\text{V}, I_O=0$ to 150mA	—	—	10	mA
Off-state bias current	I_{OFF}	$V_I=11\text{V}, V_S=0\text{V}$	—	—	2	μA
Strobe pin input current	I_S	$V_I=11\text{V}, V_S=2.5\text{V}$	—	—	200	μA
Strobe pin threshold voltage	$V_{S(TH)}$	$V_I=11\text{V}$	0.8	2	2.4	V
Ripple rejection ratio	RR	$V_I=9$ to $13\text{V}, I_O=150\text{mA}, f=120\text{kHz}$	—	55	—	dB

■ Application Circuit

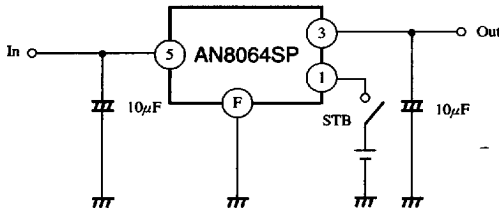

- When using at a low temperature, it is recommended to use capacitors with a low internal impedance (for example, tantalum capacitors) for output capacitors.

■ Characteristics Curve

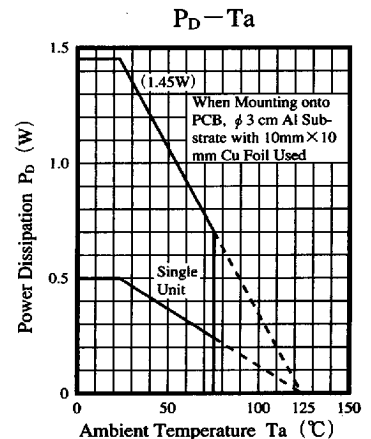

■ 6932852 0012761 396 ■

Panasonic