# PNP Silicon General Purpose Amplifier Transistor

This PNP transistor is designed for general purpose amplifier applications. This device is housed in the SOT-723 package which is designed for low power surface mount applications, where board space is at a premium.

#### Features

- Reduces Board Space
- High h<sub>FE</sub>, 210-460 (Typical)
- Low V<sub>CE(sat)</sub>, < 0.5 V
- ESD Performance: Human Body Model; > 2000 V, Machine Model; > 200 V
- Available in 4 mm, 8000 / Tape & Reel
- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These are Pb–Free Devices

#### **MAXIMUM RATINGS** ( $T_A = 25^{\circ}C$ )

Rating	Symbol	Value	Unit
Collector-Base Voltage	V <sub>(BR)CBO</sub>	-60	Vdc
Collector-Emitter Voltage	V <sub>(BR)CEO</sub>	-50	Vdc
Emitter-Base Voltage	V <sub>(BR)EBO</sub>	-6.0	Vdc
Collector Current – Continuous	Ι <sub>C</sub>	-100	mAdc

**THERMAL CHARACTERISTICS** 

Rating	Symbol	Max	Unit
Power Dissipation (Note 1)	PD	265	mW
Junction Temperature	TJ	150	°C
Storage Temperature Range	T <sub>stg</sub>	-55 ~ +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


1. Device mounted on a FR-4 glass epoxy printed circuit board using the minimum recommended footprint.




# **ON Semiconductor®**

http://onsemi.com

## PNP GENERAL PURPOSE AMPLIFIER TRANSISTORS SURFACE MOUNT







F9 = Specific Device Code M = Date Code

#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
2SA2029M3T5G	SOT-723 (Pb-Free)	8000 / Tape & Reel
NSV2SA2029M3T5G	SOT-723 (Pb-Free)	8000 / Tape & Reel


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

# **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = $25^{\circ}$ C)


Characteristic	Symbol	Min	Тур	Мах	Unit
Collector–Base Breakdown Voltage (I <sub>C</sub> = $-50 \ \mu Adc$ , I <sub>E</sub> = 0)	V <sub>(BR)CBO</sub>	-60	-	-	Vdc
Collector-Emitter Breakdown Voltage (I <sub>C</sub> = $-1.0$ mAdc, I <sub>B</sub> = 0)	V <sub>(BR)CEO</sub>	-50	-	-	Vdc
Emitter-Base Breakdown Voltage ( $I_E = -50 \mu Adc$ , $I_E = 0$ )	V <sub>(BR)EBO</sub>	-6.0	-	-	Vdc
Collector-Base Cutoff Current (V <sub>CB</sub> = $-30$ Vdc, I <sub>E</sub> = 0)	I <sub>CBO</sub>	-	-	-0.5	nA
Emitter-Base Cutoff Current ( $V_{EB}$ = -7.0 Vdc, $I_B$ = 0)	I <sub>EBO</sub>	-	-	-0.1	μΑ
Collector–Emitter Saturation Voltage (Note 2) ( $I_C = -50$ mAdc, $I_B = -5.0$ mAdc)	V <sub>CE(sat)</sub>	_	_	-0.5	Vdc
DC Current Gain (Note 2) (V <sub>CE</sub> = -6.0 Vdc, I <sub>C</sub> = -1.0 mAdc)	h <sub>FE</sub>	120	_	560	_
Transition Frequency ( $V_{CE} = -12$ Vdc, $I_{C} = -2.0$ mAdc, f = 30 MHz)	f <sub>T</sub>	_	140	_	MHz
Output Capacitance ( $V_{CB} = -12$ Vdc, $I_E = 0$ Adc, $f = 1.0$ MHz)	C <sub>OB</sub>	-	3.5	-	pF

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 2. Pulse Test: Pulse Width  $\leq$  300 µs, Duty Cycle  $\leq$  2%.

### **TYPICAL ELECTRICAL CHARACTERISTICS**

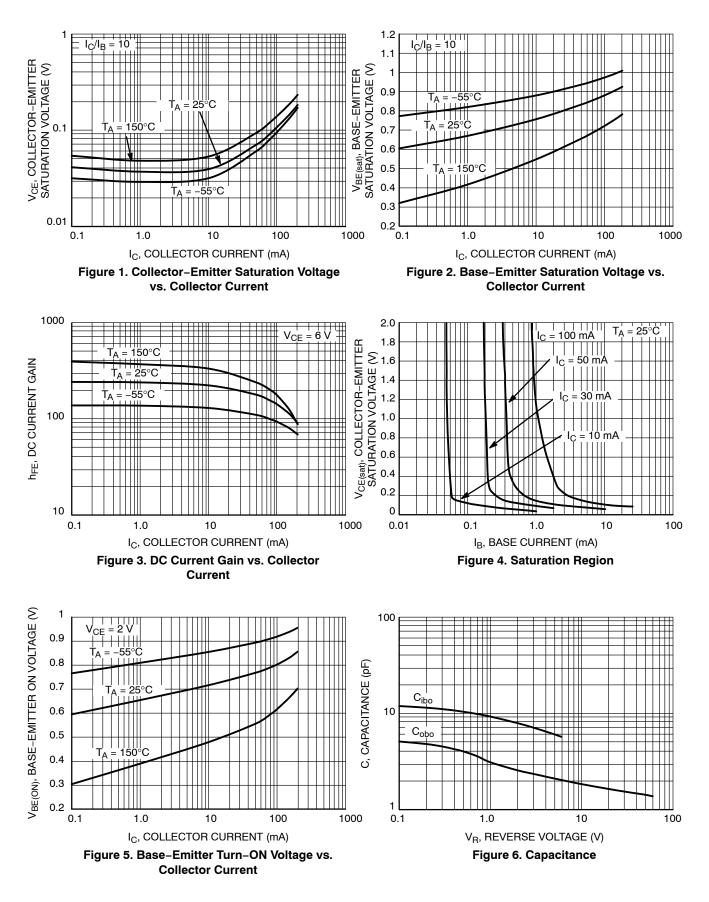


### **TYPICAL ELECTRICAL CHARACTERISTICS**

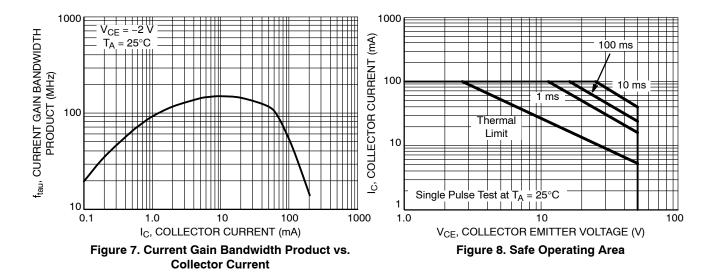

#### PACKAGE DIMENSIONS

SOT-723 CASE 631AA ISSUE D

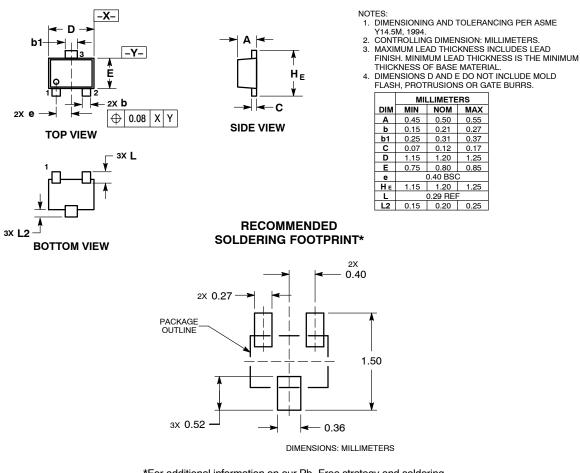

\*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and the intervent and the intervent of the pathology of t

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support:

Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative