



NOV. 10, 1995

DESCRIPTION

The WT8046 is a silicon monolithic circuit designed for synchronous signal processing and power saving detection of multi-sync display monitors, which can cope with many kinds of PC's and workstations.

It can be applied to display monitors supporting standard IBM VGA, VESA super VGA and IBM 8514/A video modes. It can also be used in other high-end display monitors supporting non-standard video modes with user-defined horizontal/vertical frequency ranges.

The WT8046 incorporates many functional circuits, including horizontal/vertical frequency discrimination, display mode selection, synchronous pulse polarity power saving detection, and test pattern into this single chip IC.

WT8046 is more convenient for you to shrink the PC board size and to reduce the material and labor cost with fewer components.

FEATURES

- 31K (640 x 480) Test pattern output.
- Accepting two separated H&V synchronous signals with positive/ negative polarity.
- Support VESA VGA (640X480, 640X400, 640X350), VESA SVGA (800X600), European SVGA (800X600), and VESA new SVGA (800X600) .
- Capable of processing horizontal frequency between 25KHZ to 80KHZ.
- Standard IBM video mode control outputs (1024X768, 640X480, 640X400, 640X350).
- Five non-standard horizontal frequency control outputs in predefined frequency range.
- Power saving mode - It can detect the conditions of monitor to decide which one will be selected as following: ON/STANDBY/SUSPEND/OFF mode.
- Fixed polarity outputs on both horizontal and vertical synchronous signals.
- Power supply voltage: DC 5 volts; but for those pins with open-drain structure, such like the mode select control output and frequency discrimination control output pins, can be connected to 12 volts through pull-high resistor.

APPLICATION

- Auto size control for Multi-Sync Display Monitors

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419



WT8046

Synchronous Signal Discriminator with Power Saving
Detector and Test Pattern for Green Monitor

ORDERING INFORMATION

Part No.	Package	Note
WT8046N24P1	P-DIP 24L	V * 128
WT8046N24P3	P-DIP 24L	Without Mute
WT8046N24P4	P-DIP 24L	Without Mute
WT8046N24P5	P-DIP 24L	V * 1
WT8046N24P6	P-DIP 24L	With Mute
WT8046N24P7	P-DIP 24L	Without Mute
WT8046N24P8	P-DIP 24L	With Mute
WT8046N28P1	P-DIP 28L (skinny)	V * 128 Without Mute
WT8046N28P2	P-DIP 28L (skinny)	V * 128 Without Mute
WT8046N28P3	P-DIP 28L (skinny)	V * 1 Without Mute
WT8046N28P4	P-DIP 28L (skinny)	V * 128 With Mute
WT8046N28P5	P-DIP 28L (skinny)	V * 1 With Mute
WT8046N28P6	P-DIP 28L (skinny)	V * 1 Without Mute
WT8046N28P7	P-DIP 28L (skinny)	V * 128 With Mute
WT8046N28P8	P-DIP 28L (skinny)	V * 1 With Mute

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419




WT8046


Synchronous Signal Discriminator with Power Saving
Detector and Test Pattern for Green Monitor

PIN CONFIGURATION


WT8046N24P1

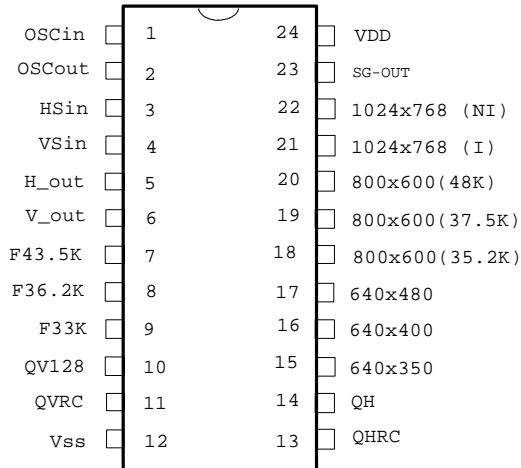


WT8046N24P3

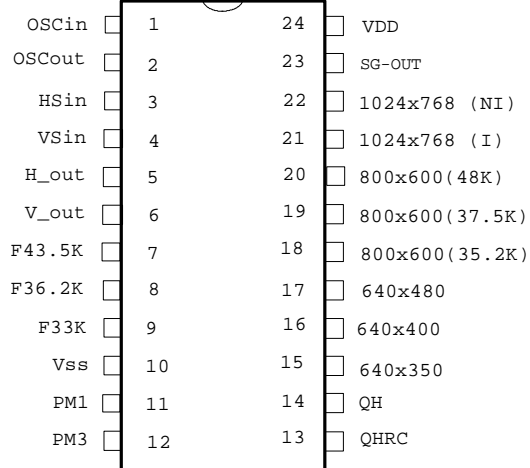

WT8046N24P4

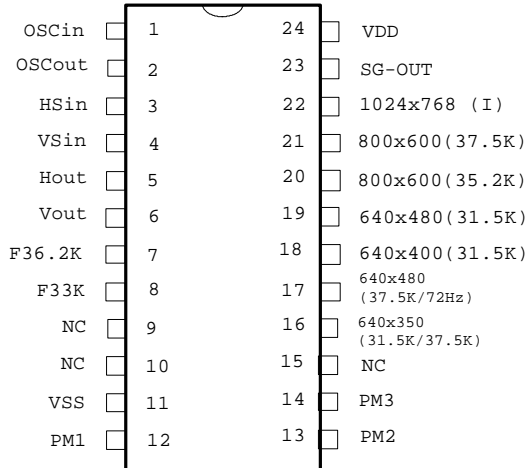

WT8046N24P5

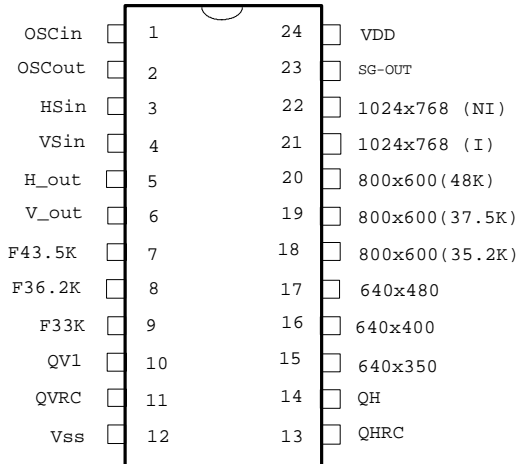

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241


Fax: 886-35-770419




WT8046

Synchronous Signal Discriminator with Power Saving
Detector and Test Pattern for Green Monitor


WT8046N24P6

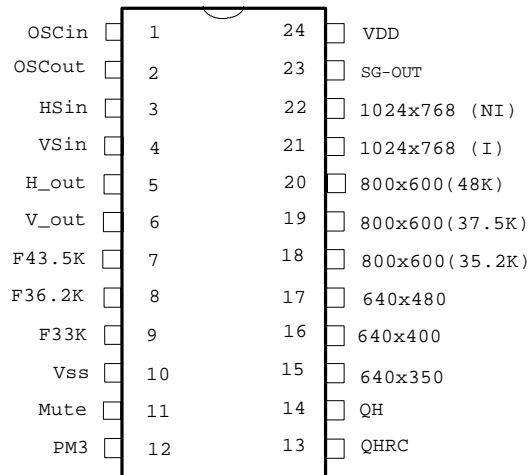

WT8046N24P7

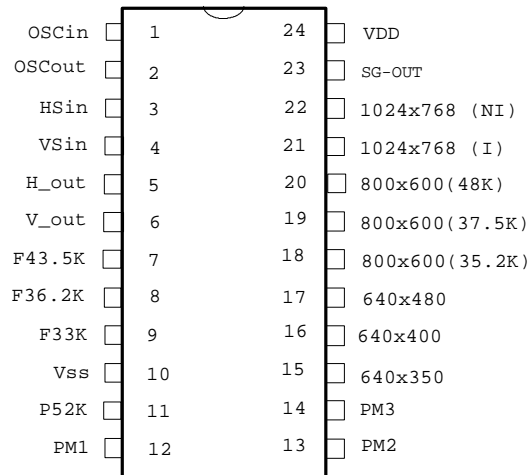

WT8046N24P8

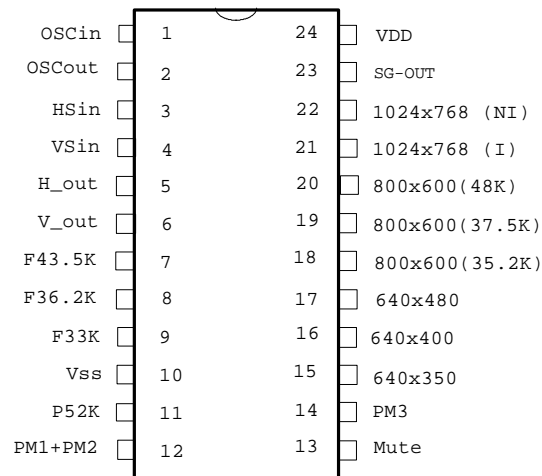

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419



WT8046

Synchronous Signal Discriminator with Power Saving
Detector and Test Pattern for Green Monitor

WT8046N28P1

OSCin	1	28	VDD
OSCout	2	27	SG-OUT
HSin	3	26	1024x768 (NI)
VSin	4	25	1024x768 (I)
H_out	5	24	800x600(48K)
V_out	6	23	800x600(37.5K)
F43.5K	7	22	800x600(35.2K)
F36.2K	8	21	640x480
F33K	9	20	640x400
QV128	10	19	640x350
QVRC	11	18	QH
Vss	12	17	QHRC
F52K	13	16	PM3
PM1	14	15	PM2

WT8046N28P3

OSCin	1	28	VDD
OSCout	2	27	SG-OUT
HSin	3	26	1024x768 (NI)
VSin	4	25	1024x768 (I)
H_out	5	24	800x600(48K)
V_out	6	23	800x600(37.5K)
F43.5K	7	22	800x600(35.2K)
F36.2K	8	21	640x480
F33K	9	20	640x400
QV1	10	19	640x350
QVRC	11	18	QH
Vss	12	17	QHRC
F52K	13	16	PM3
PM1	14	15	PM2

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419



WT8046

Synchronous Signal Discriminator with Power Saving
Detector and Test Pattern for Green Monitor

WT8046N28P4

OSCin	1	28	VDD
OSCOut	2	27	SG-OUT
HSin	3	26	1024x768 (NI)
VSin	4	25	1024x768 (I)
H_out	5	24	800x600(48K)
V_out	6	23	800x600(37.5K)
F43.5K	7	22	800x600(35.2K)
F36.2K	8	21	640x480
F33K	9	20	640x400
QV128	10	19	640x350
QVRC	11	18	QH
Vss	12	17	QHRC
F52K	13	16	PM3
PM1 +PM2	14	15	Mute

WT8046N28P5

OSCin	1	28	VDD
OSCOut	2	27	SG-OUT
HSin	3	26	1024x768 (NI)
VSin	4	25	1024x768 (I)
H_out	5	24	800x600(48K)
V_out	6	23	800x600(37.5K)
F43.5K	7	22	800x600(35.2K)
F36.2K	8	21	640x480
F33K	9	20	640x400
QV1	10	19	640x350
QVRC	11	18	QH
Vss	12	17	QHRC
F52K	13	16	PM3
PM1 +PM2	14	15	Mute

Note: The Hout and Vout pin of N28P1, N28P3, N28P4 and N28P5 are negative pulse.

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419

**ABSOLUTE MAXIMUM RATINGS**

ITEM	SYMBOL	VALUE	UNIT
Digital Supply Voltage	V_{DD}	5.5	V
Horizontal Sync. Input Voltage	V_{HS}	$V_{DD(5)+0.3}$	V_{PP}
Vertical Sync. Input Voltage	V_{VS}	$V_{DD(5)+0.3}$	V_{PP}
Power Dissipation	P_D	300	mW
Operating Temperature Range	T_{OPT}	0 to 70	°C
Storage Temperature Range	T_{STG}	-40 to 125	°C

RECOMMENDED OPERATING CONDITIONS

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Digital Supply Voltage	$V_{DD(5)}$	4.5	5	5.5	V
Supply Current (Standby)	I_P			13	mA
Synchronous Input Voltage Low	V_{IL}			0.8	V_{PP}
Synchronous Input Voltage High	V_{IH}	2.4	4	5.5	V_{PP}
Horizontal Synchronous Frequency Range	F_H	25	100	80 (for N32)	KHz
Vertical Synchronous Frequency Range	F_V	50	100	120	Hz
Crystal Clock Frequency	F_{CLK}	3.5764	3.58	3.5836	MHz
Open Drain Pull High Voltage	V_{OH}			12	V
Resistance of Monostable for Hsin	R_H	10		100	kΩ
Capacitance of Monostable for Hsin	C_H	100	100	100	pF
Resistance of Monostable for Vsin	R_V	10		500	kΩ
Capacitance of Monostable for Vsin	C_V	100	100	100	pF

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419



ELECTRICAL CHARACTERISTICS

(V_{DD}=5V, T_{OPT}=25°C, Crystal=3.58MHz)

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Discrimination of H. Synchronous Frequency	F33K	32.9	i D	33.1	KHz
	F36.2K	36.1	i D	36.3	KHz
	F43.5K	43.4		43.6	KHz
	F52K	51.9	i D	52.1	KHz
Output Low (H-out, V-out), when I _{OL} = 4mA	V _{OL1}			0.4	V _{PP}
Output High (H-out, V-out), when I _{OH} = -400µA	V _{OH1}	2.4			V _{PP}
Open Drain Output Low when I _{OL} = 6mA	V _{OL2}			0.4	V _{PP}
Output Sink Current (H-out, V-out) when V _{OL1} = 0.4V	I _{OL1}			4	mA
Output Drive Current (H-out, V-out) when V _{OH1} = 2.4V	i W _{OH1} i W			400	µA
Open Drain Sink Current when V _{OL2} = 0.4V	I _{OL2}		10		mA
Open Drain Sink Current when V _{OL2} = 5V	I _{OL2}		40		mA

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419



MONO_STABLE DYNAMIC ELECTRICAL CHARACTERISTICS

(Ta=25°C; Input tr,tf=20ns, CL=50PF)

ITEM	MIN.	TYP.	MAX.	UNITS
Input H_SYNC Pulse Width	0.558	i D	4	f g
Input V_SYNC Pulse Width	0.0384	i D	0.125	ms
Output Pulse Transition Time	i D	100	200	ns
Output Pulse Propagation Delay	i D	300	600	ns
Output Pulse Width Adjust Range	10	i D	90	c M
H_MONO_STB:				
31KHz; 7.5KHz			26.66	f g
31KHz; 8KHz			20.83	f g
31KHz; 7KHz			17.54	f g
V_MONO_STB:				
(50Hz; 20Hz)*128			65.10	f g
6.4KHz; 5.36KHz			97.66	f g
(50Hz; 0Hz)*128				
6.4KHz; 0.2KHz		10		ms
(50Hz; 20Hz)*1				
Typical Pulse width Variation as a function of Temperature at 75°C Jto 24 °C J	i D	i D	i D	c M
Typical Pulse Width Variation as a function of Supply Voltage at 4.75V to 5.25V	i D	i D	i D	c M
Output Low (Sink) Current	1	i D	6	mA
Output Voltage Low-Level	i D	0	0.05	V
Output Voltage High-Level	4.95		i D	V
Output Jitter (Hout & Vout)			5	ns
Hin & Vin Rise time and Fall time = 200ns				

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419



APPLICATION INFORMATION

Name	Function	Structure of Terminal
OSCCin	A clock generating circuit is built into the chip. So if a resonator is connected to OSCin/OSCCout, a clock signal can be obtained	I
OSCCout	Refer to OSCin pin	O
Hsin	Input terminal of horizontal synchronous signal	I, TTL compatible
Vsin	Input terminal of vertical synchronous signal	I, TTL compatible
H_OUT	Output pin, fixed negative polarity of original H_SYNC signal with same pulse width (but, positive for N28P2, N28P6,N28P7 and N28P8)	I, TTL compatible
V_OUT	Output pin, fixed negative polarity of original V_SYNC signal with same pulse width (but, positive for N28P2, N28P6,N28P7 and N28P8)	O, TTL compatible
F43.5k	>43.5k then active low, <43.5k then high	O, open drain
F36.2k	>36.2k then active low, <36.2k then high	O, open drain
F33k	>33k then active low, <33k then high	O, open drain
QV	Output pin, fixed positive polarity of vertical signal; pulse width depend upon RV & CV.	O, open drain
QVRC	Input pin, connected to Vdd through RV & to ground through CV	I
Vss	Ground	
F52k	>52k then active low, <52k then high	O, open drain
PM1	Indicate in STAND-BY mode	O, open drain

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.
Science-Based Industrial Park
Hsin-Chu, Taiwan, R.O.C.
Tel: 886-35-780241
Fax: 886-35-770419



Name	Function	Structure of Terminal
PM2	Indicate in SUSPEND mode	O, open drain
PM3	Indicate in OFF mode	O, open drain
QHRC	Input pin, connected to Vdd through RH & to ground through CH.	I
QH	Output pin, fixed positive polarity of horizontal signal; pulse width depend upon RH & CH	O, open drain
640 _i ̃50	Mode select control output, if IBM VGA 640 _i ̃50 mode, or VESA VGA 640 _i ̃50 mode. Then active "low", else open state output	O, open drain
640 _i ̃80	VESA VGA mode 640 _i ̃80 (37.5k/72Hz)	O, open drain
640 _i ̃00	If IBM VGA 640 _i ̃00 mode, or VESA VGA 640 _i ̃00 mode then active "low" (640 _i ̃00, 31.5k, for N24P4)	O, open drain
640 _i ̃80	If IBM VGA 640 _i ̃80 mode, or VESA VGA 640 _i ̃80 mode then active "low" (640 _i ̃80, 31.5k, for N24P4)	O, open drain
800 _i ̃00	VESA super VGA mode (H_SYNC = 35.2k, V_SYNC = 56Hz)	O, open drain
800 _i ̃00	European super VGA mode (H_SYNC = 37.5k, V_SYNC = 60Hz)	O, open drain
800 _i ̃00	VESA new super VGA mode (H_SYNC = 48k, V_SYNC = 72Hz)	O, open drain
1024 _i ̃768(I)	IBM 8512/A interlace mode (H_SYNC = 35.5k, V_SYNC = 86Hz)	O, open drain
1024 _i ̃768(NI)	IBM 8514/A non-interlace mode (H_SYNC = 48.5k, V_SYNC = 60Hz)	O, open drain
SG-OUT	Test Pattern Output	O, Buffer output
Vdd	5 Volts power supply	

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419



APPLICATION DESCRIPTION

DPMS (Display Power Management Signaling) Detection

As per DPMS proposal version 1.0P, revision 0.54P, WT8046 provides Monitor Power Management Detection Circuit for the convenience of monitor designers in designing power saving monitors, or the so called "Green Monitors". Please refer to the table 1 as below for power states defined in the DPMS.

DPMS requires at least 5 seconds delay before transition from ON state to any power saving state, to avoid unintentionally entering a power saving state during display resolution changes and timing mode changes. And it can be done instantaneously, for the transition between any power saving state.

Table 1 Display Power Management Summary

State	Signals			DPMS Compliance Requirement	Power Savings	Recovery Time
	Horizontal	Vertical	Video			
On	Pulses	Pulses	Active	Mandatory	None	Not Applicable
Stand-by	No Pulses	Pulses	Blanked	Optional	Minimal	Short
Suspend	Pulses	No Pulses	Blanked	Mandatory	Substantial	Longer
Off	No Pulses	No Pulses	Blanked	Mandatory	Maximum	System Dependent

* "No-Pulse" represents the frequency of Hsin or Vsin less than or equal to 10Hz, but "Pulses" represents that frequency of Hsin greater than or equal to 10KHz and Vsin greater than or equal to 40Hz



The way WT8046 implements VESA DPMS

As shown on Table 2, WT8046 use PM1 to represent Stand-by State, PM2 as Suspend State and PM3 as OFF State. When H_SYNC / V_SYNC signals transition from ON State to any one of the three power saving states, WT8046 will delay 5.9 seconds to meet the VESA DPMS requirement: the minimum 5 seconds delay to avoid unintentionally entering a power saving state during display resolution and timing mode changes. If during this delay time period, H_SYNC and V_SYNC signals return to ON State, then all three power management pins (PM1, PM2 and PM3) will remain ON state. If power management state of H_SYNC and V_SYNC prolong for more than 5.9 seconds, then these three power management pins will change to the corresponding states. While changing from any power saving state back to ON State will take about 0.368 second for H_SYNC / VSYNC pulse checking. And transition between any power saving state will be done immediately.

Table 2: The truth table of Power Saving Detector

MODE	Hsin	Vsin	PM1	PM2	PM3
ON	Pulses	Pulses	1	1	1
STAND_BY	No Pulses	Pulses	0	1	1
SUSPEND	Pulses	No Pulses	0	0	1
OFF	No Pulses	No Pulses	0	0	0
OVERRIDE	No Pulses	No Pulses	1	1	1
	Manually	PWR ON			



OVERRIDE mode:

To initial override, both horizontal and vertical sync signals shall be in the no pulses condition when the display is maintained during the entire time override is required. As soon as pulses are detected on horizontal and vertical sync signal. The display shall enter DPMS operation.

In override mode WT8046 has a 31k (640x480) test pattern output as shown in following.

Test pattern has two CROSS BAR Graphic, which can auto changing by 6 sec Timer counter.

Three power management pins are open drain structure and active low. If you do not need all those three power saving states in your design. You can just short two or three pins of the pins PM1/PM2/PM3. for example, by shorting pin PM1 and pin PM2, you will have only two power saving states, that is OFF and Suspend states, so you have three states total, including ON State. Please refer to Application Circuit 1.

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.


Tel: 886-35-780241

Fax: 886-35-770419

Mono_Stable Circuit

WT8046 includes two sets of Mono_Stable Circuits, one uses H_SYNC as trigger signal, the other uses either H_SYNC or V_SYNC as trigger signal (this for 24 pin and 28 pin packages the trigger signal is fixed to H_SYNC); for N24p4 package, there is no mono-stable circuit.

The Mono_Stable Circuit is triggered by positive edge, no matter H_SYNC or V_SYNC is used as trigger signal. Please refer to the timing chart as below:

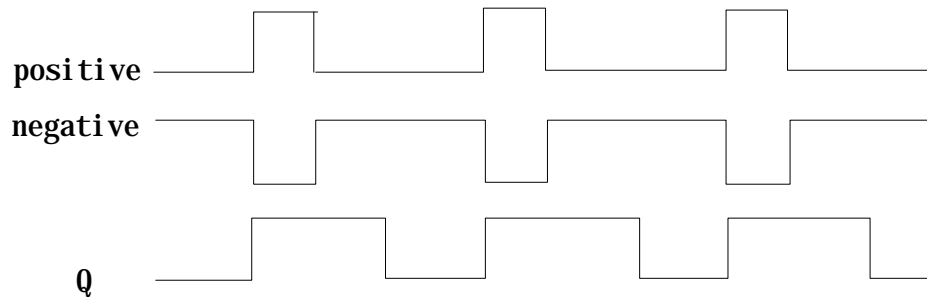Trigger Pulse

The output of Mono_Stable Circuit is open drain structure, and can be pulled up to +12V maximum.



In case of using output pulse of V_MONO_STABLE as voltage source, in order to prevent the problem of slow response time, causing from the low frequency on vertical synchronous signal, WT8046 internally increases the vertical signal frequency to 128 times the original frequency, that is from 50Hz - 120 Hz to 6.4KHz - 15.36KHz. Then WT8046 uses this increased frequency as the input signal of MONO_STABLE, so the leading edge of the signal of the increased frequency will trigger the MONO_STABLE circuit.

An external resistor (Rx) and an external capacitor (Cx) control the timing and accuracy of the circuit. Adjustment of Rx and Cx provides a wide range of output pulse widths from the Q and Q-bar terminals. The delay time from trigger input to output transition is independent of Rx and Cx.

The minimum value of external resistor Rx is 10k ohms. The typical value of external capacitor Cx is 100 pF. The time period (T) for this multi-vibrator can be calculated with the formula: $T \approx 1.1 R_x \bullet C_x$.

H/V Frequency Divisions and Video Modes

Figure 1 illustrates the typical frequency ranges of H and V sync signals for display monitors. The operating video modes are determined by the H and V frequencies, and occasionally, by their polarities. The typical video modes of display monitors include the IBM VGA, VESA VGA, European VGA/super VGA, VESA super VGA, IBM 8514/A, and XGA.

WT8046 can determine 13 standard video modes (refer to Table 3) according to H and V frequencies and polarities. These standard video modes include the IBM VGA, VESA VGA, VESA super VGA and IBM 8514/A. This provides the users with the capability to adjust the screen size for different modes.

WT8046 pre-sets the discriminating points both on H and V frequencies. The discriminating points for H sync are 33KHz, 36.2KHz, 43.5KHz, 52KHz and 60KHz (for 32 pin). These discriminating points will be able to identify various video modes as shown in Fig. 1. WT8046 also provides the flexibility for users to define these discriminating points through mask option.



The tolerance for H sync frequency discrimination is $\pm 0.1\text{KHz}$. For instance, the 33KHz discriminating point will be able to distinguish the H sync frequency that is either "less than or equal to" 32.9KHz, or "greater than or equal to" 33.1KHz. There is an ambiguous region between 32.9KHz and 33.1KHz.

WT8046 has two discriminating points, 64Hz and 78Hz, for the V sync signal as shown in Fig.1. The tolerance is $\pm 0.4\text{Hz}$. The discrimination results of V sync frequency are used internally for mode selection.

Base on the package consideration, IBM VGA mode and VESA VGA mode (both have same resolution: 640x480, 640x400, 640x350) are decoded on same open Drain structure output pins. In case of these whole six modes decoding is needed, the horizontal frequency discrimination pin F33k or F36.2k must take into consideration. The horizontal frequency of IBM VGA mode is 31.5kHz, and VESA IBM VGA mode is 37.5kHz. Using F33k or F36.2k pin can clearly identify these two standard modes. The decoding circuit is attached on application section for reference.

Graphic Standard	Resolution	Horizontal	Vertical	Polarities
IBM VGA	640X350	31.5kHz	70Hz	+,-
	640X400	31.5kHz	70Hz	-,+
	640X480	31.5kHz	60Hz	-,-
VESA Super VGA	800X600	35.2kHz	56Hz	
IBM 8512/A Interlaced	1024X768	35.5kHz	86Hz	
VESA VGA	640X350	37.5kHz	83Hz	+,-
	640X400	37.5kHz	83Hz	-,+
	640X480	37.5kHz	72Hz	-, -
European Super VGA	800X600	37.5kHz	60Hz	
VESA New Super VGA	800X600	48.0kHz	72Hz	
IBM 8514/A Non-Interlaced	1024X768	48.5kHz	60Hz	

Table 3: Graphic Standard and Frequencies

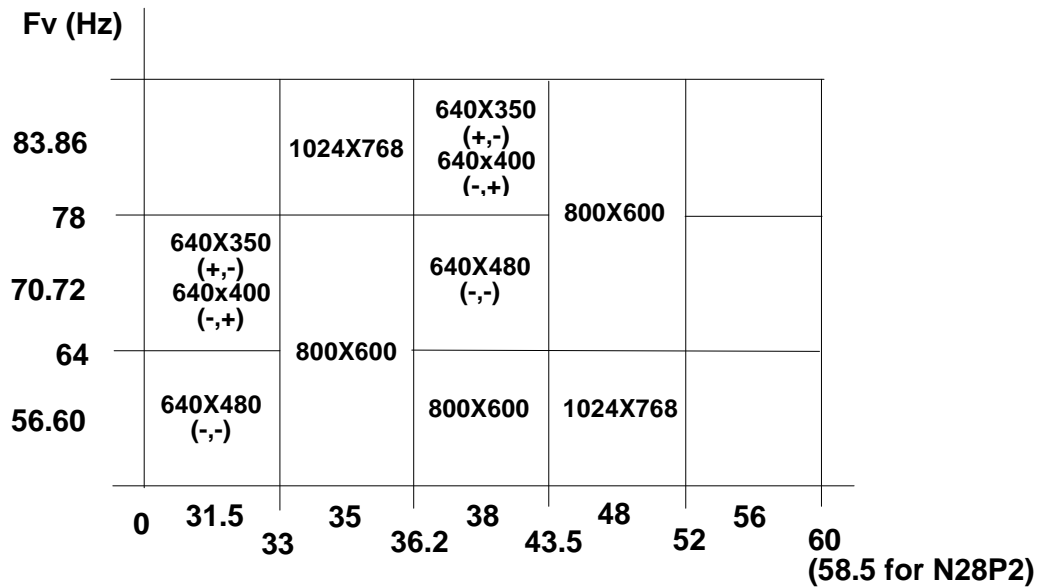


Figure 1: H/V Frequency Division and Video Mode

PIN		640X480	640X400	640X350
IBM	640X480	0	1	1
	640X400	1	0	1
VGA	640X350	1	1	0
VESA	640X480	0	1	1
	640X400	1	0	1
VGA	640X350	1	1	0

Table 4: IBM VGA/ VESA VGA Decoding Table



Horizontal Frequency Discriminator

There are horizontal frequency discriminator pins on different type package: 33k, 36.2k (for N24P4 package); 33k, 36.2k, 43.5k (for 24 pin); 33k, 36.2k, 43.5k, 52k (for 28 pin); please refer to table 5 for the logical truth table of these pins. These frequency discriminator pins output can be used for C_S Capacitor Control directly as well as other application.

Signal	F33k	F36k	F43.5k	F52k	F60k
Hsync					
Hs<33k	1	1	1	1	1
36k>Hs>33k	0	1	1	1	1
43.5k>Hs>36k	0	0	1	1	1
52k>Hs>43.5k	0	0	0	1	1
60k>Hs>52k	0	0	0	0	1

Table 5: Truth table of Frequency discriminator

Mute function Timing Diagram

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park


Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419



APPLICATION CIRCUIT I

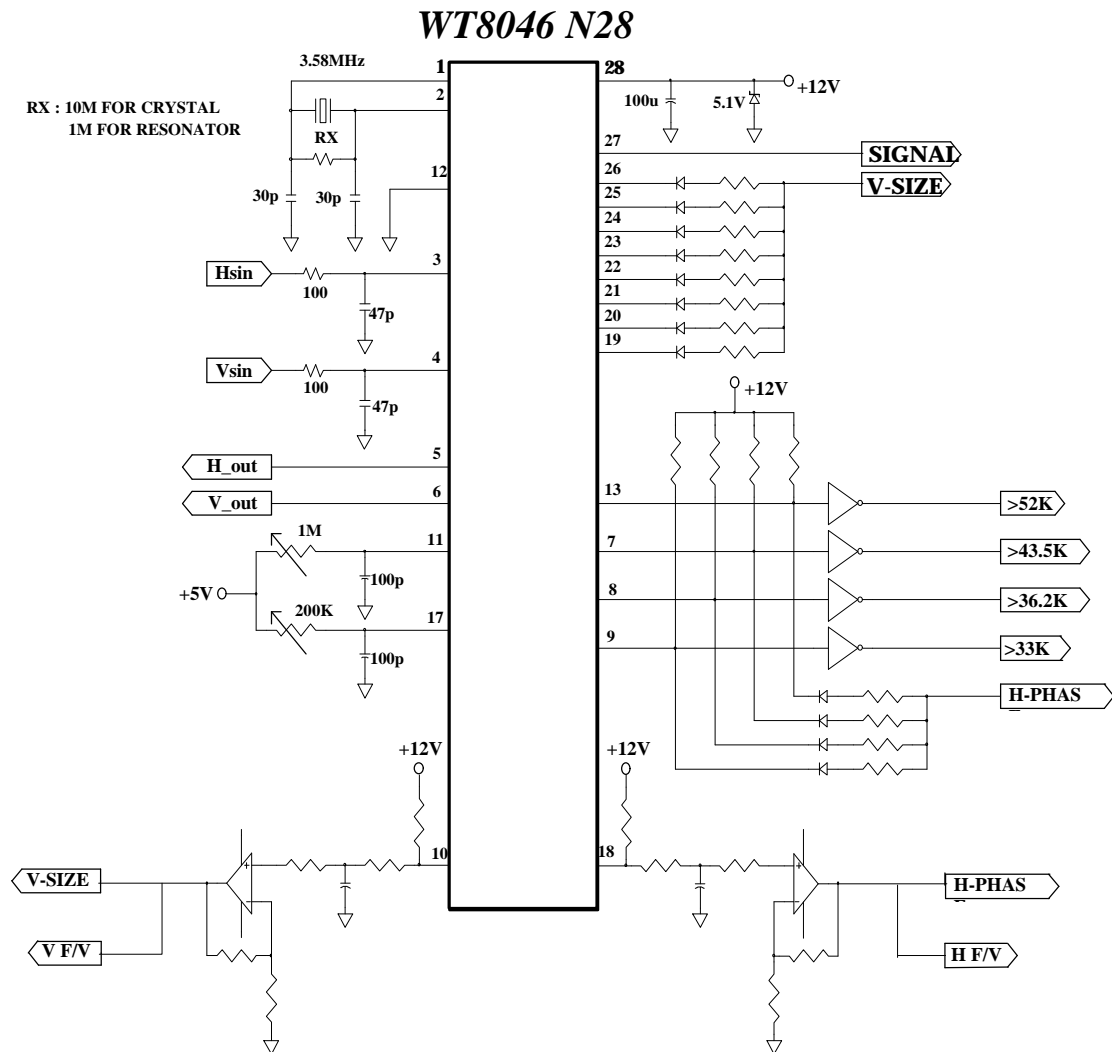

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park


Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419

APPLICATION CIRCUIT II

WT8046 Power Saving Circuit

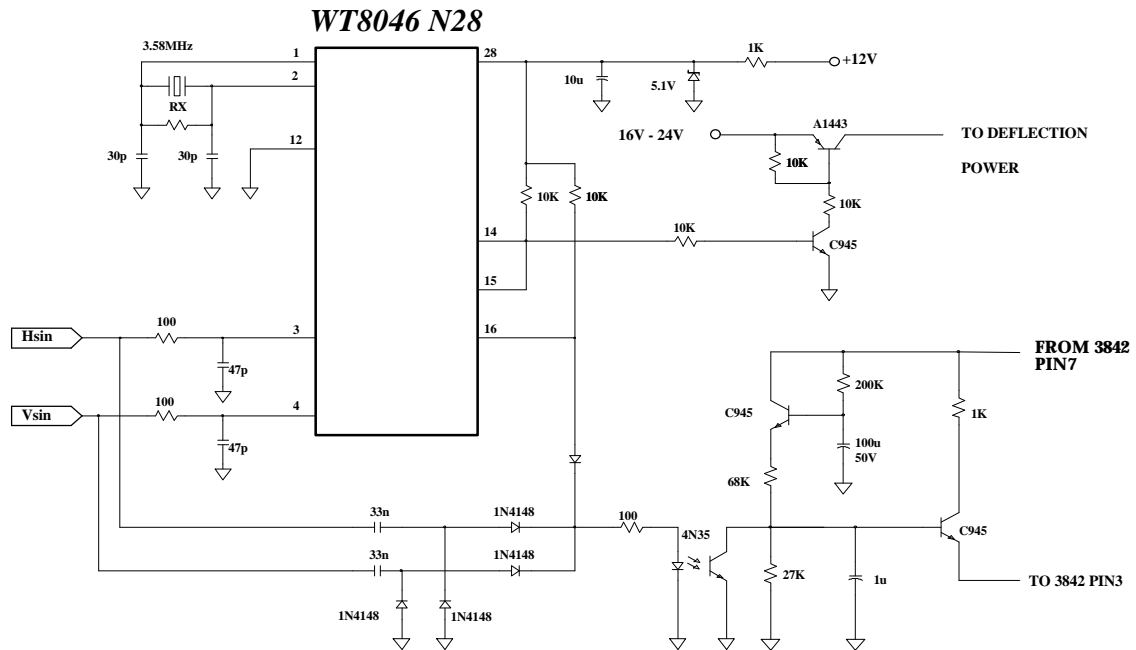

	Hsin	Vsin	PM1	PM2	PM3	DEFLECTION	HEATER	SWITCH PW R
NORMAL	PULSE	PULSE	H	H	H	ON	ON	ON
STANDBY	NO PULSE	PULSE	L	H	H	OFF	ON	ON
SUSPEND	PULSE	NO PULSE	L	L	H	OFF	ON	ON
OFF	NO PULSE	NO PULSE	L	L	L	OFF	OFF	OFF

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419




WT8046

Synchronous Signal Discriminator with Power Saving
Detector and Test Pattern for Green Monitor

APPLICATION CIRCUIT III

WT8046 IBM/VESA VGA DECODER

WT8046 N28

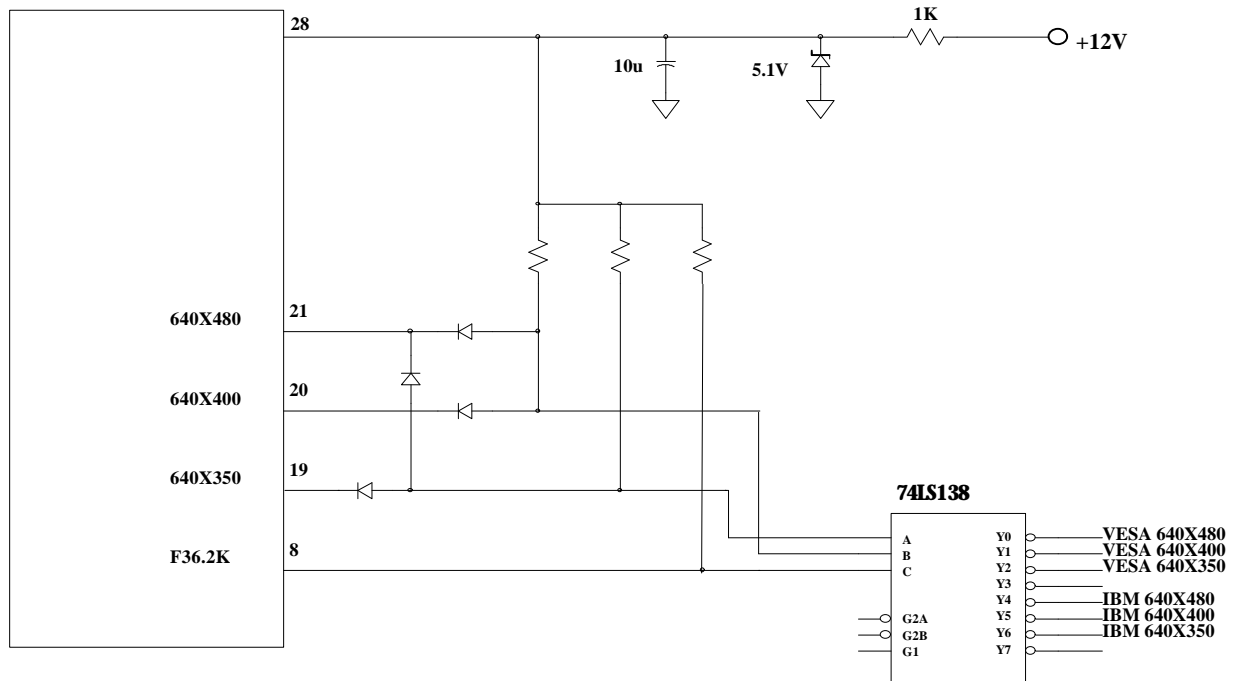

640X480	640X400	640X350	B	A
0	1	1	0	0
1	0	1	0	1
1	1	0	1	0
1	1	1	1	1

F36.2K	B	A	OUT	
1	1	1	Y7	
1	1	0	Y6	IBM640X350
1	0	1	Y5	IBM640X400
1	0	0	Y4	IBM640X480
0	1	1	Y3	
0	1	0	Y2	VESA640X350
0	0	1	Y1	VESA640X400
0	0	0	Y0	VESA640X480

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park


Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241


Fax: 886-35-770419

APPLICATION CIRCUIT IV

WT8046 N28

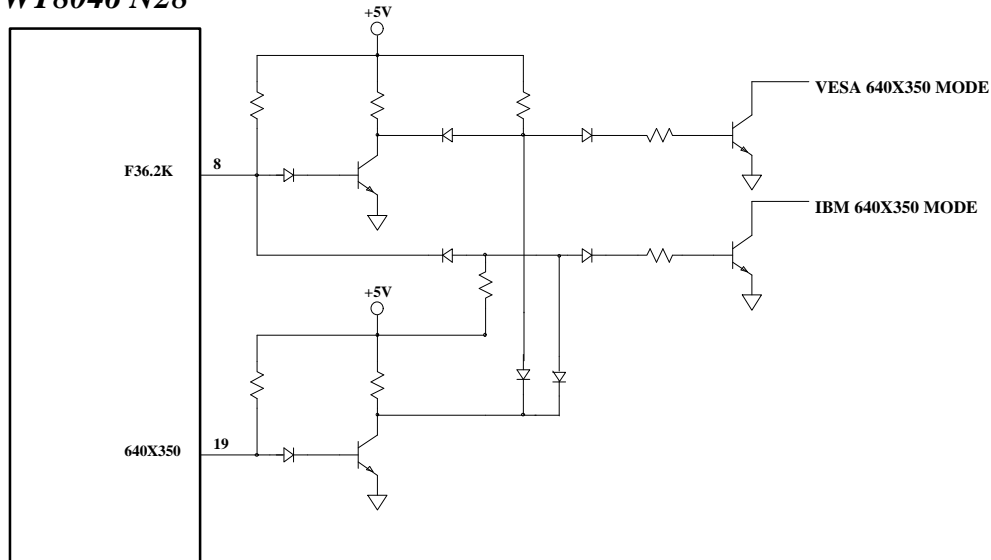

WT8046 N28

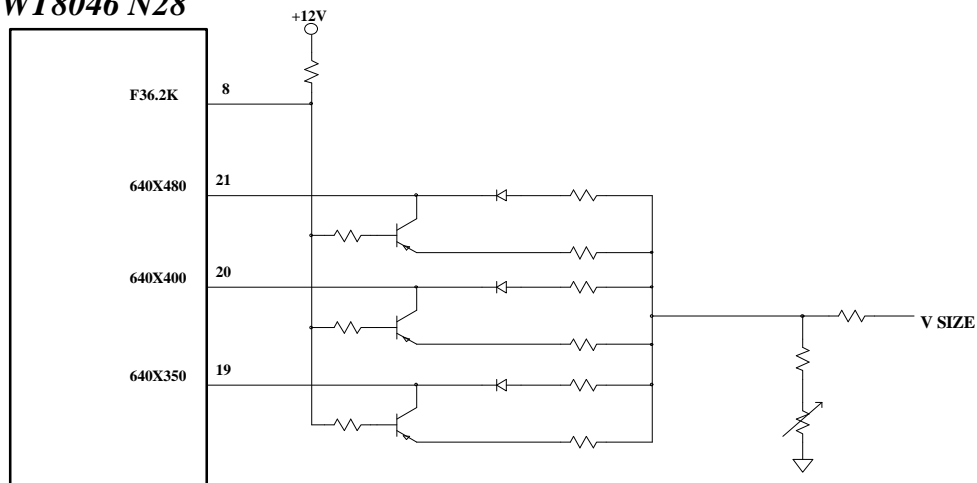

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419



DIP OUTLINE DIMENSIONS

	A	B	C	D	E	F	G
N24	1250	542	152	100	130	650	600
N28 SKINNY	1385	288	130	100	130	355	310

⌋ Dimension in mil
⌋ 1mm = 39.37 mil

Weltrend reserves the right to make changes to its products at any time without notice in order to improve design and supply the best possible product. We assume no responsibility for any errors which may appear in this publication.



WT8046

Synchronous Signal Discriminator with Power Saving
Detector and Test Pattern for Green Monitor

WT8046N28P2

OSCin	1	28	VDD
OSCout	2	27	SG-OUT
HSin	3	26	1024x768 (NI)
VSin	4	25	1024x768 (I)
H_out	5	24	800x600(48K)
V_out	6	23	800x600(37.5K)
F43.5K	7	22	800x600(35.2K)
F36.2K	8	21	640x480(31.5K)
F33K	9	20	640x400 (31.5K/37.5K)
QV128	10	19	640x480(37.5K)
QVRC	11	18	QH
Vss	12	17	QHRC
F52K	13	16	PM3
PM1	14	15	PM2

WT8046N28P6

OSCin	1	28	VDD
OSCout	2	27	SG-OUT
HSin	3	26	1024x768 (NI)
VSin	4	25	1024x768 (I)
H_out	5	24	800x600(48K)
V_out	6	23	800x600(37.5K)
F43.5K	7	22	800x600(35.2K)
F36.2K	8	21	640x480(31.5K)
F33K	9	20	640x400 (31.5K/37.5K)
QV1	10	19	640x480(37.5K)
QVRC	11	18	QH
Vss	12	17	QHRC
F52K	13	16	PM3
PM1	14	15	PM2

WT8046N28P7

OSCin	1	28	VDD
OSCout	2	27	SG-OUT
HSin	3	26	1024x768 (NI)
VSin	4	25	1024x768 (I)
H_out	5	24	800x600(48K)
V_out	6	23	800x600(37.5K)
F43.5K	7	22	800x600(35.2K)
F36.2K	8	21	640x480(31.5K)
F33K	9	20	640x400 (31.5K/37.5K)
QV128	10	19	640x480(37.5K)
QVRC	11	18	QH
Vss	12	17	QHRC
F52K	13	16	PM3
PM1 +PM2	14	15	Mute

WT8046N28P8

OSCin	1	28	VDD
OSCout	2	27	SG-OUT
HSin	3	26	1024x768 (NI)
VSin	4	25	1024x768 (I)
H_out	5	24	800x600(48K)
V_out	6	23	800x600(37.5K)
F43.5K	7	22	800x600(35.2K)
F36.2K	8	21	640x480(31.5K)
F33K	9	20	640x400 (31.5K/37.5K)
QV1	10	19	640x480(37.5K)
QVRC	11	18	QH
Vss	12	17	QHRC
F52K	13	16	PM3
PM1 +PM2	14	15	Mute

Note: The Hout and Vout pin of N28P2, N28P6, N28P7 and N28P8 are positive pulse.

Weltrend Semiconductor, Inc.

2F., No. 24, Industry E. 9th Rd.

Science-Based Industrial Park

Hsin-Chu, Taiwan, R.O.C.

Tel: 886-35-780241

Fax: 886-35-770419