



Biased Detector With 50 Ohm SMA Male to SMA Female
 Video Out Operating From 500 MHz to 1,000 MHz

TECHNICAL DATA SHEET

PE8001-P

Biased Detector With 50 Ohm SMA Male to SMA Female Video Out Operating From 500 MHz to 1,000 MHz

Configuration

Bias Type	Biased
Detector Polarity	Positive
Body Style	Straight
RF Input Connector	SMA Male
RF Input Impedance	50 Ohms
Video Output Connector	SMA Female

Electrical Specifications

Frequency Range, MHz	500 to 1,000
Voltage Sensitivity, mV/mW	1,800
Tangential Signal Sensitivity	-54
Flatness, dB	0.5
Maximum Input Power, Watts	23
Video Capacitance, pF	100

Mechanical Specifications

Temperature

Operating Range, deg C	-55 to +125
Storage Range, deg C	-65 to +150

RF Input

Type	SMA Male
Hex Size, Inch	5/16

Video Output

Type	SMA Female
------	------------

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Biased Detector With 50 Ohm SMA Male to SMA Female Video Out Operating From 500 MHz to 1,000 MHz PE8001-P](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



Biased Detector With 50 Ohm SMA Male to SMA Female
Video Out Operating From 500 MHz to 1,000 MHz



TECHNICAL DATA SHEET

PE8001-P

Biased Detector With 50 Ohm SMA Male to SMA Female Video Out Operating From 500 MHz to 1,000 MHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Biased Detector With 50 Ohm SMA Male to SMA Female Video Out Operating From 500 MHz to 1,000 MHz PE8001-P](http://www.pasternack.com/positive-biased-schottky-diode-detector-05-10-ghz-pe8001-p-p.aspx)


URL: <http://www.pasternack.com/positive-biased-schottky-diode-detector-05-10-ghz-pe8001-p-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE8001-P CAD Drawing

Biased Detector With 50 Ohm SMA Male to SMA Female

Video Out Operating From 500 MHz to 1,000 MHz

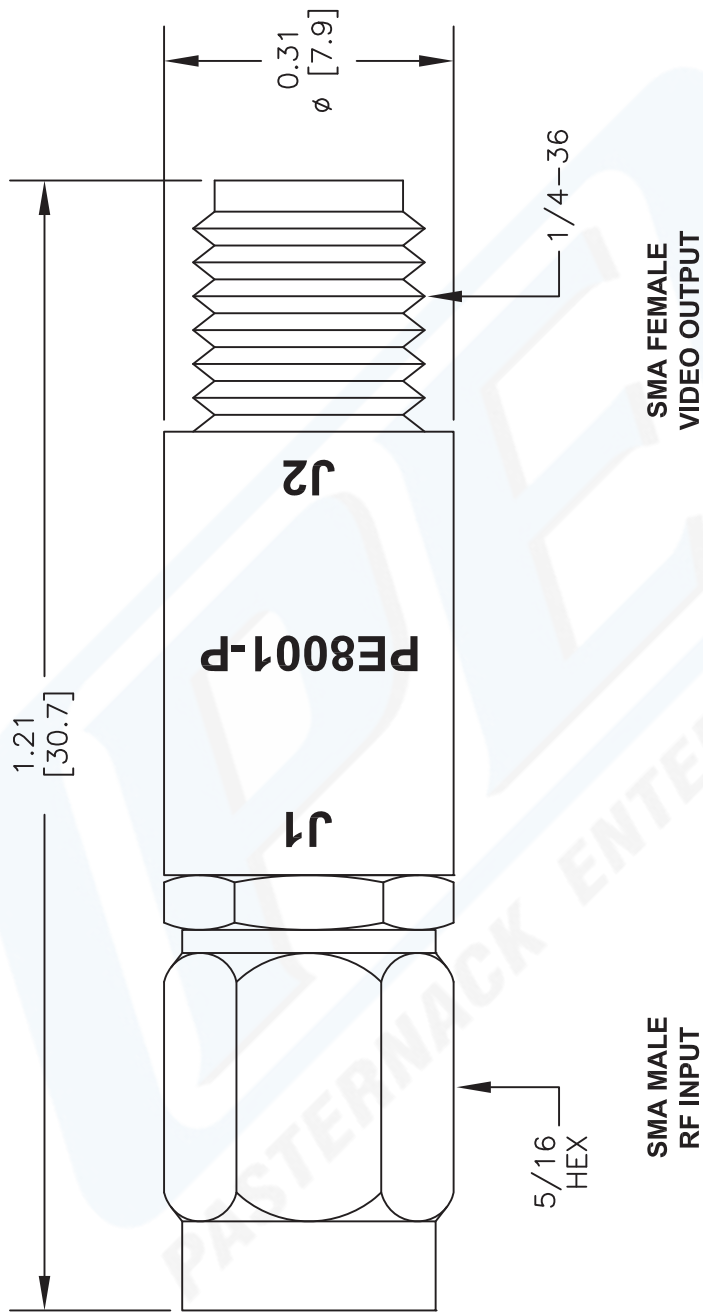

DWG TITLE

PE8001-P

FSCM NO. 53919

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE 020413

SCALE N/A

SIZE A

2233



PASTERNAK

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com