REVERSIBLE MOTOR DRIVER BA6208/BA6208F

• **DESCRIPTION**

The BA6208/BA6208BF are monolithic ICs used for driving reversible motors. They allow control of reversible motors in cassette players and other electrical equipment by using TTL-level logic signals.


The ICs contain a logic section, which controls forward and reverse rotations as well as forced stop, and an output power section, which can supply an output current of up to

100mA (typical) according to the logic control.


FEATURE

- Motor driving power transistors are built in (100mA typically)
- Brake is applied when stopping the motor (when in-puts A and B are both HIGH level).
- Built-in diode to absorb surge currents.
- Very low standby circuit current when inputs A and Bare both LOW level.
- Wide range of operating supply voltage (4.5~15.0V).
- Direct control with the TTL logic.

Outline Drawing

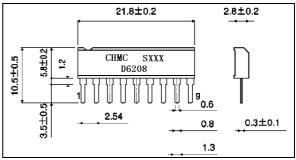


SIP9

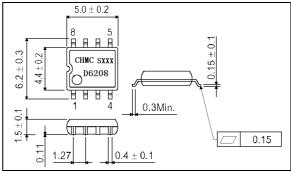


SOP8


BLOCK DIAGRAM

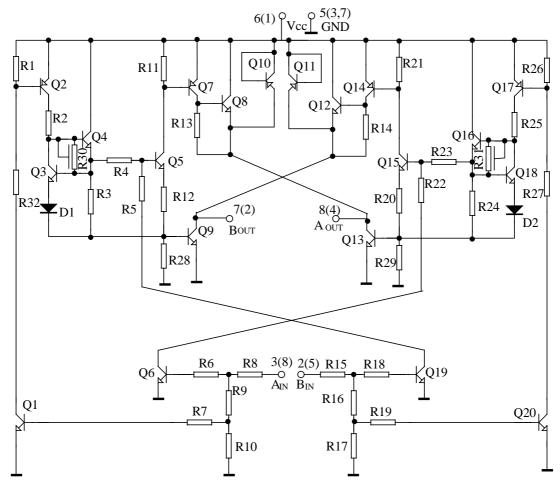

Note: Figures in parentheses are for the SOP8

PIN CONNECTION

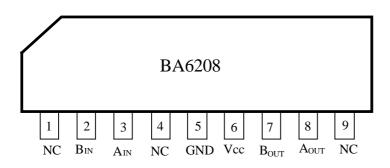



ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Characteristic	Symbol	Value	Unit
Power Supply Voltage	Vcc	18	V
Maximum Output Current	Io	500	mA
Power Dissipation	PD	700	mW
Operating Temperature	Topr	-20~60	°C
Storage Temperature	Tstg	-55~125	°C

Note: Reduced by 7 mW for each increase in Ta of 1°C over 25°C

ELECTRICAL CHARACTERISTICS

(unless otherwise specified: Ta=25°C, Vcc=9V)

Characteristics	Test conditions	Symbol	Min.	Тур.	Max.	Unit
Output Current		Io	200			mA
Output saturation voltage	Io=100mA	VCE		1.0	1.6	V
Input high level voltage		VIH	2.0			V
Input low level voltage		VIL			0.8	V
Standby supply current	When input A and B both LOW level	Ist			0.4	mA
Input high level current	VIH=4.5V	Ітн		250	400	μΑ

A diode that absorbs at least 500 mA is built in to give protection against surge currents with a pulse width of 10 ms and a duty ratio of 10% or less.

RECOMMENDED OPERATING CONDITIONS (Ta=25°C)


Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	Vcc	4.5		15	V

INPUT TRUTH TABLE

3pin (Ain)	2pin (Bin)	8pin (Aout)	7pin (Aout)
Н	L	Н	L
L	Н	L	Н
Н	Н	L	L
L	L	OPEN	OPEN

APPLICATION CIRCUIT

SIP9 Package

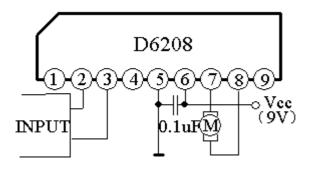

SOP8 Package

