
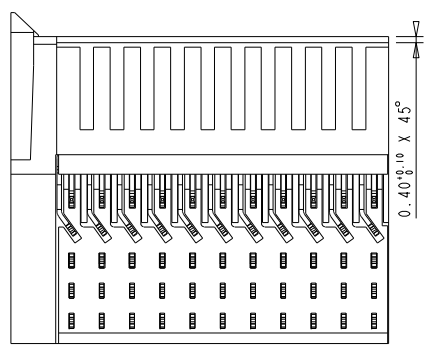




Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de FCI. Droits de reproduction FCI.

FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

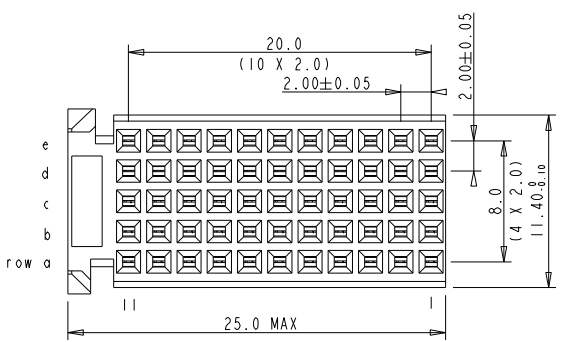

LAY-OUT
P.C.B. -HOLE

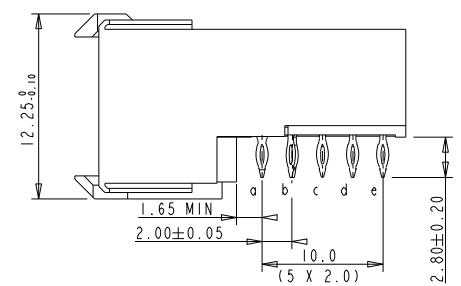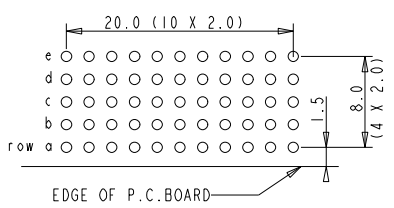

PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES 1. " " LEAD FREE INDICATOR : LF=LEAD FREE
" " PERFORMANCE LEVEL INDICATOR (REF DWG NO. BSC 201844.003)

2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 04	KN	14-09-01
B	105-0093	MINI	11-06-05
C	DG05-0278	Kason	02-08-05
-	-	-	-
-	-	-	-
-	-	-	-

Material		Spec ref	
Mat code		tolerance	projection
Heatreat		1DEC ± 0.2 1DEC 20°C ± 0.1 20°C ANGLES ± 1° HOEKEN	
Plating/Finish		size A4	Scale 2.000
Dr W.Panis	07/04/92	Product family MILLIPACS	ECN DG05-0278
Eng		Model Name	REL Level
Chr		Model Revision	
Appr			
FCI	title MPACS 5R RA RCP CONN TYPE A	dwg no BSC201418021	Rev. C
Pro/E file	catalog	customer drawing	sheet 1 of 1