



SAW Components

Data Sheet B 801





SAW Components

B 801

Satellite Receiver Filter

479,50 MHz

Data Sheet


Ceramic package **QCC8C**

Features

- Two-channel satellite receiver filter
- IF filter for DSB receivers
- Constant group delay
- Ceramic package for **Surface Mounted Technology (SMT)**

Terminals


- Ni, gold plated

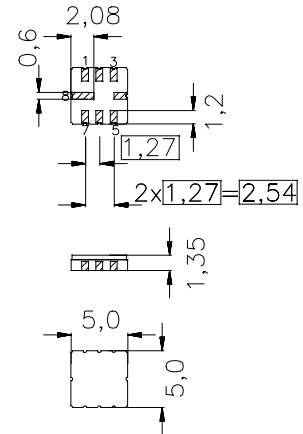

Dimensions in mm, approx. weight 0,1 g

Pin configuration

- 1 Input channel 2
- 2 Input ground
- 3 Input channel 1
- 5 Output ground channel 2
- 6 Output
- 7 Ground, output ground channel 1
- 4,8 Case ground

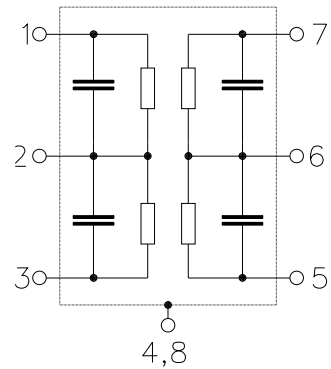

Type	Ordering code	Marking and Package according to	Packing according to
B 801	B39481-B801-U310	C61157-A7-A56	F61074-V8169-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_A	-25/+85	°C	between any terminals between any terminals
Storage temperature range	T_{stg}	-40/+85	°C	
DC voltage	V_{DC}	0	V	
AC voltages	V_{pp}	5	V	


SAW Components
B 801
Satellite Receiver Filter
479,50 MHz
Data Sheet
Characteristics of channel 1

Reference temperature:	$T_A = 25\text{ °C}$
Terminating source impedance:	$Z_S = 50\ \Omega$
Terminating load impedance:	$Z_L = 50\ \Omega$
Group delay aperture	0,25MHz

			min.	typ.	max.	
Insertion attenuation	479,50 MHz	α	—	22,3	25	dB
Reference level for the following data						
Center frequency		f_c	478,50	479,50	480,50	MHz
Pass bandwidth		$\alpha_{rel} \leq 3\text{ dB}$ B_{3dB}	—	27,0	—	MHz
Relative attenuation		α_{rel}				
	466,00 MHz		—	2,8	4,5	dB
	493,00 MHz		—	3,0	4,5	dB
Lower sidelobe	430,00 ... 452,00 MHz		36,0	41,0	—	dB
Upper sidelobe	507,00 ... 530,00 MHz		34,0	39,0	—	dB
Reflected wave signal suppression						
0,14 μs ... 2,0 μs after main pulse			40,0	49,0	—	dB
Amplitude ripple (p-p)		$\Delta\alpha$				
	471,00 ... 488,00 MHz		—	0,3	0,6	dB
Group delay ripple (p-p)		$\Delta\tau$				
	466,00 ... 493,00 MHz		—	11	18	ns
Impedance at 479,50 MHz						
	Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	0,67 3,2	—	k Ω pF
	Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	0,06 5,6	—	k Ω pF
Temperature coefficient of frequency		TC_f	—	- 86	—	ppm/K


SAW Components
B 801
Satellite Receiver Filter
479,50 MHz
Data Sheet
Characteristics of channel 2



Reference temperature:	$T_A = 25\text{ °C}$
Terminating source impedance:	$Z_S = 50\ \Omega$
Terminating load impedance:	$Z_L = 50\ \Omega$
Group delay aperture	0,25MHz

			min.	typ.	max.	
Insertion attenuation	479,50 MHz	α	—	22,3	25	dB
Reference level for the following data						
Center frequency		f_c	478,50	479,50	480,50	MHz
Pass bandwidth		$\alpha_{rel} \leq 3\text{ dB}$		18,0	—	MHz
Relative attenuation		α_{rel}				
	470,50 MHz		—	2,9	4,7	dB
	488,50 MHz		—	2,9	4,4	dB
Lower sidelobe	430,00 ... 457,50 MHz		36,0	43,0	—	dB
Upper sidelobe	500,50 ... 530,00 MHz		34,0	41,0	—	dB
Reflected wave signal suppression						
	0,13 μ s ... 2,0 μ s after main pulse		40,0	45,0	—	dB
Amplitude ripple (p-p)		$\Delta\alpha$				
	476,00 ... 483,00 MHz		—	0,2	0,6	dB
Group delay ripple (p-p)		$\Delta\tau$				
	470,50 ... 488,50 MHz		—	11	18	ns
Impedance at 479,50 MHz						
	Input: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	0,59 3,5	—	k Ω pF
	Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	0,06 5,6	—	k Ω pF
Temperature coefficient of frequency		TC_f	—	- 86	—	ppm/K



Data Sheet


Frequency response of channel 1

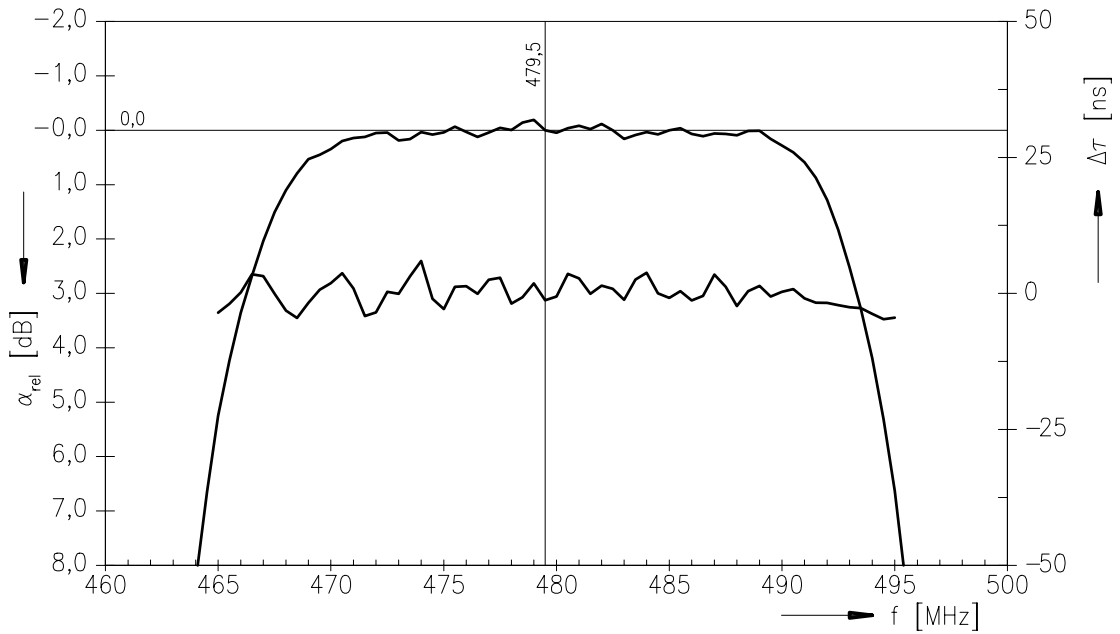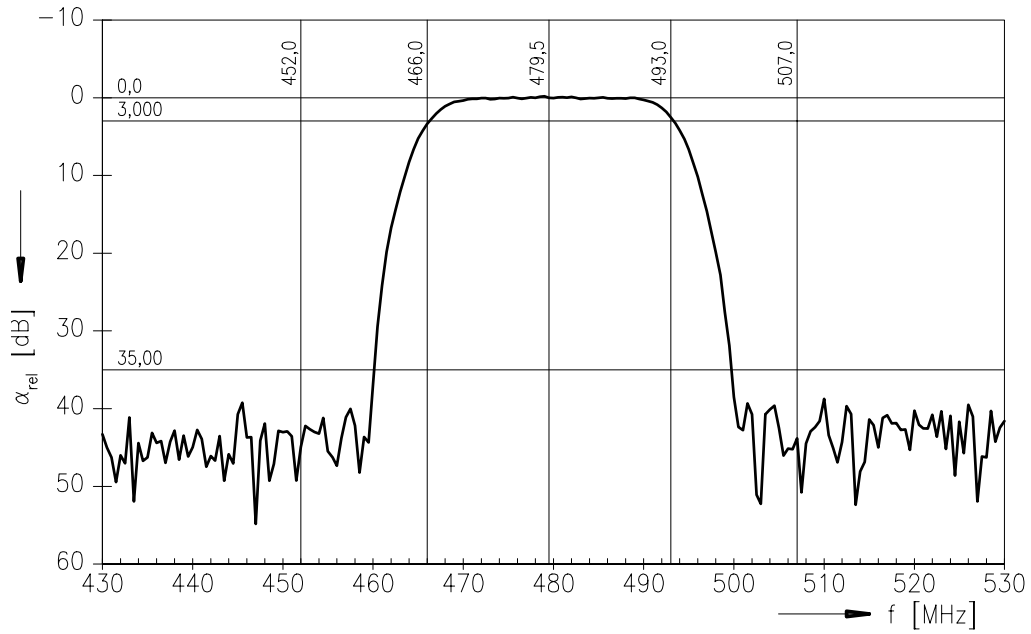




Data Sheet

Frequency response of channel 1

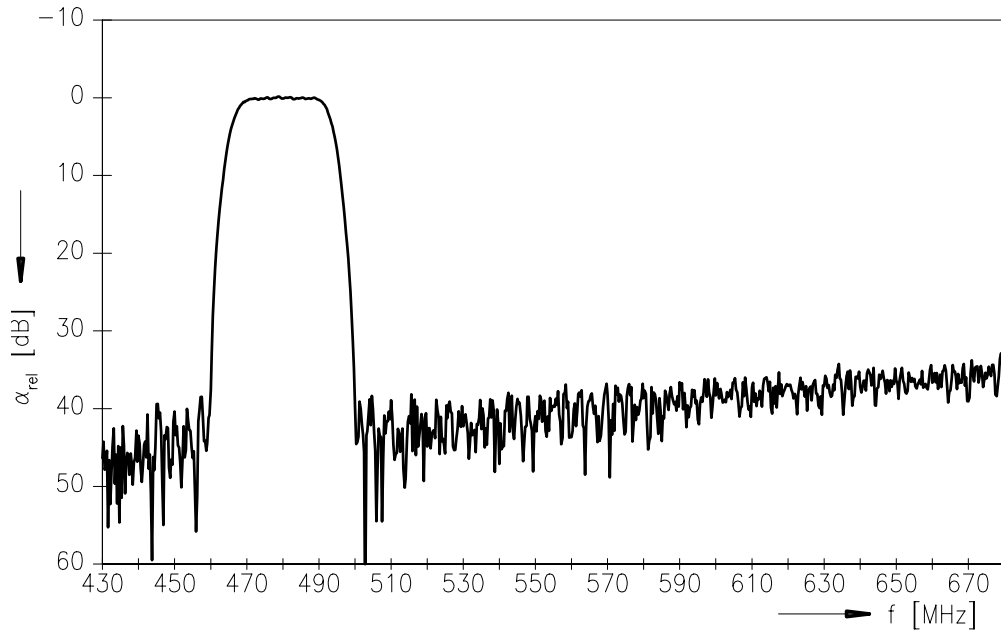



Time domain response of channel 1

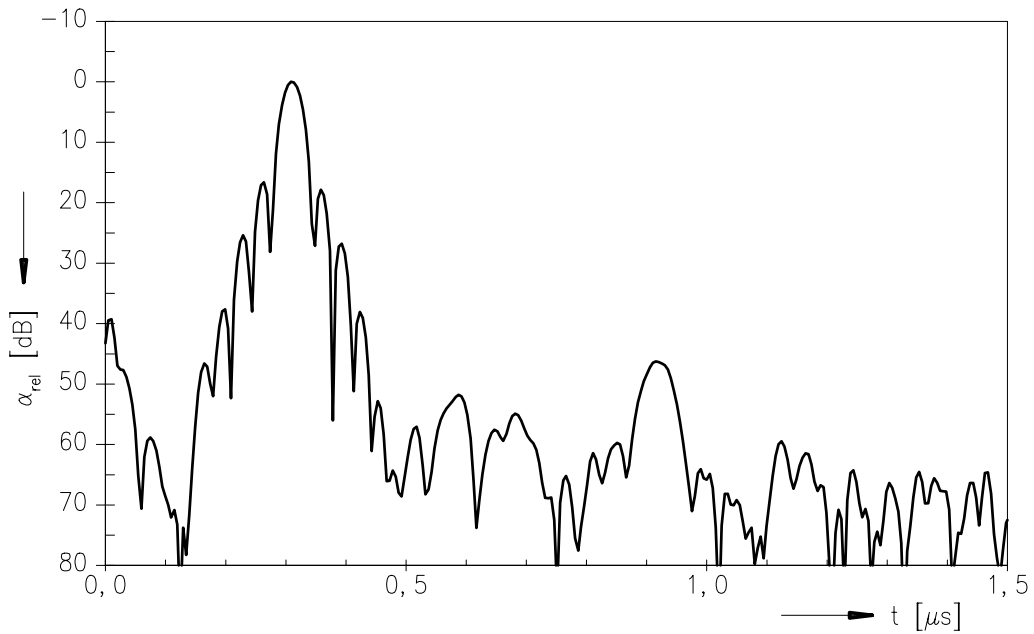



Data Sheet


Frequency response of channel 2

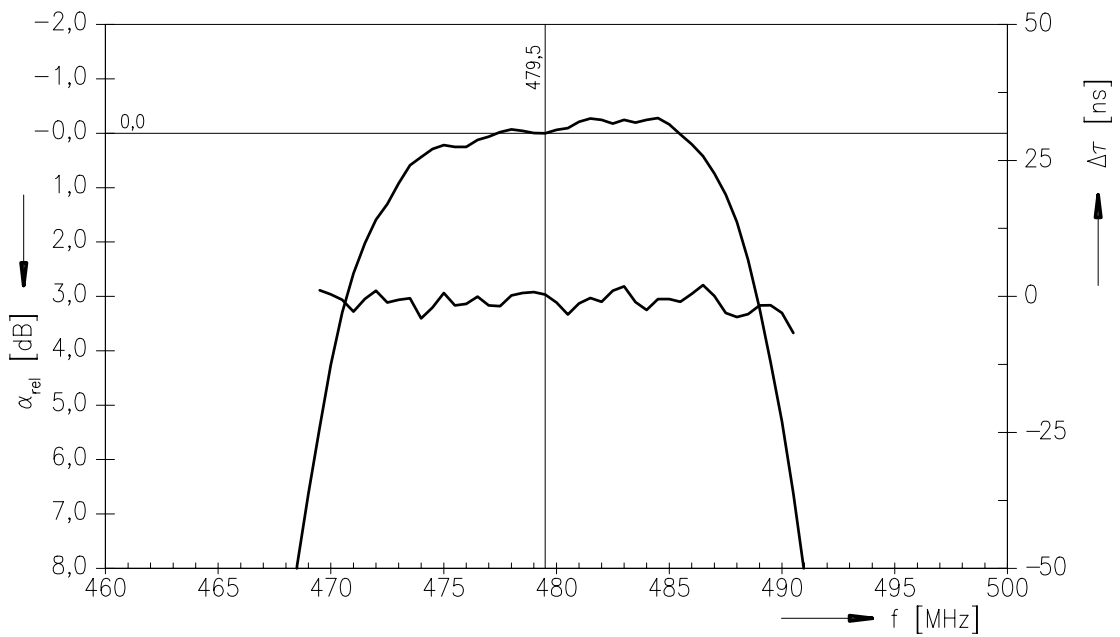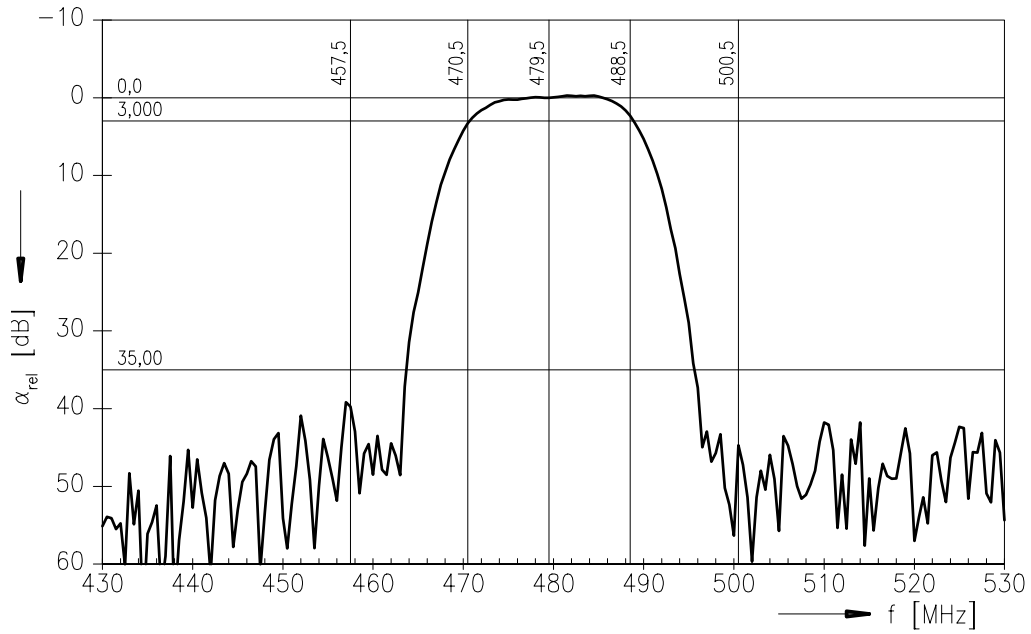




Data Sheet

Frequency response of channel 2

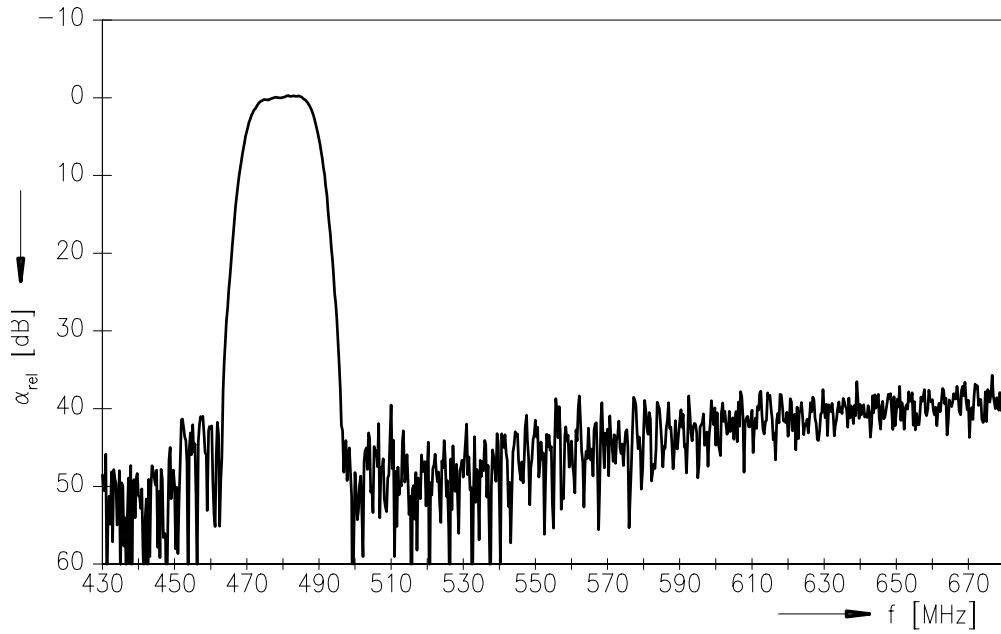

Time domain response of channel 2

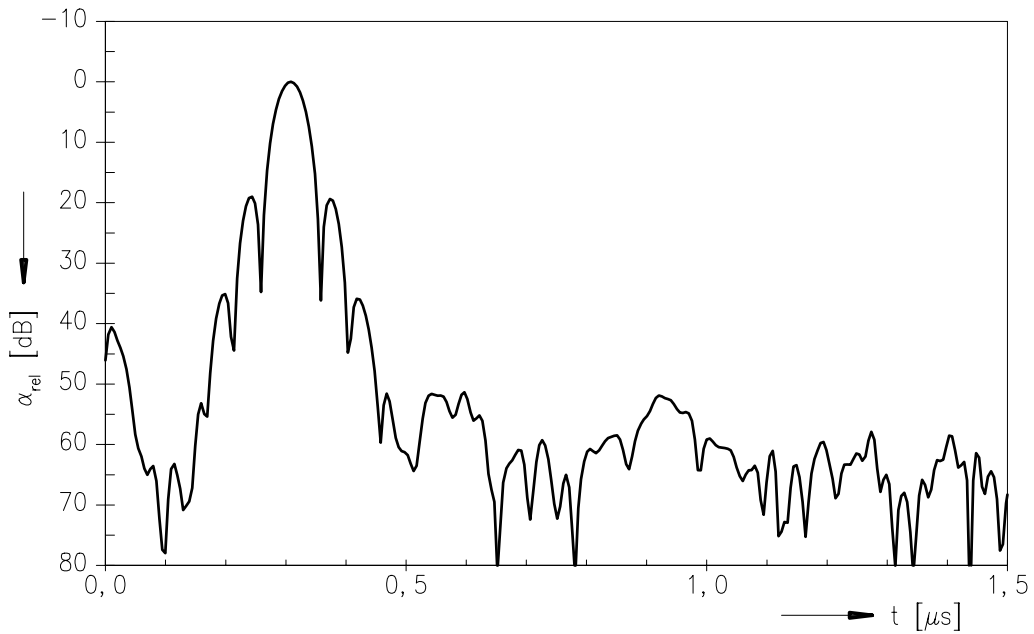



SAW Components

B 801

Satellite Receiver Filter

479,50 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW CE MM PD

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.