


| PIN | COM |
|-----|-----|
| 1 | F |
| 2 | A |
| 3 | B |
| 4 | G |
| 5 | C |
| 6 | E |
| 7 | D |
| 8 | DP |
| 9 | COM |
| 10 | COM |

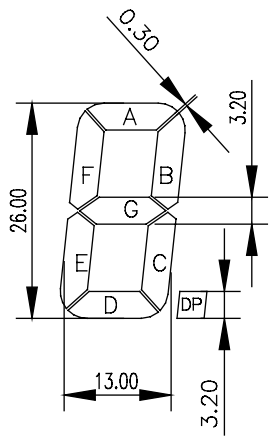

- NOTES:
- 1.TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.20
 - 2.VIEWING ANGLE: 6:00 O'CLOCK
 - 3.DISPLAY MODE: POSITIVE/TRANSFLECTIVE/TN TYPE
 - 4.DUTY CYCLE: STATIC
 - 5.DRIVING VOLTAGE: 5.0V
 - 6.OPERATING TEMP.: -30°C TO 80°C
 - 7.STORAGE TEMP.: -40°C TO 90°C

| | |
|--|--|
| AZ Displays, Inc. | |
| DESIGN BY: D.X.W | SAMPLE: NO <input type="checkbox"/> YES <input type="checkbox"/> |
| CHECKED BY: | CUSTOMER TITLE: |
| APP BY: | GD-1990P UNIT: mm |
| DATE: SEP 07 2001 | |
| SHEET 1 OF 1 | |
| COMPOSE TYPE: MONO <input type="checkbox"/> ALONG <input type="checkbox"/> | |
| X-STEP: * # mm | |
| Y-STEP: * # mm | |