


ROCKER SWITCHES

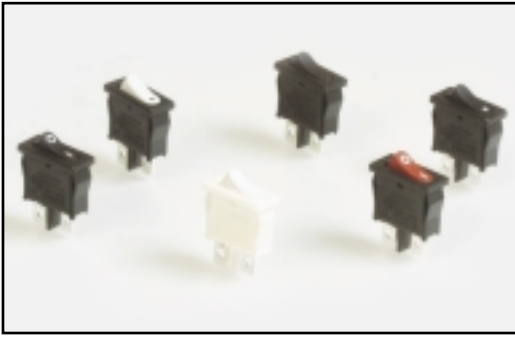

SPECIFICATIONS


Rating:	10A@125 VAC, 6A@250 VAC (UL, CUL) 4(1)A @250 VAC (D, S, N, Fi, VDE)
Mechanical Life:	≥50,000 cycles
Electrical Life:	≥10,000 cycles
Contact Resistance:	<20 mΩ (Initial)
Insulation Resistance:	>1,000MΩ @ 500V DC
Dielectric Strength:	>1,500V AC 1 minute (Initial) >3,000V between poles
Safety Std. Approval:	UL, CSA, VDE, Semko, Nemko, Demko, Fimko

MATERIALS

Body:	Nylon 66 (UL94 V-2)
Rocker:	Nylon 66 (UL94 V-2)
Contact Surface:	Coin Silver
Terminal:	Silver plated copper alloy



HOW TO ORDER

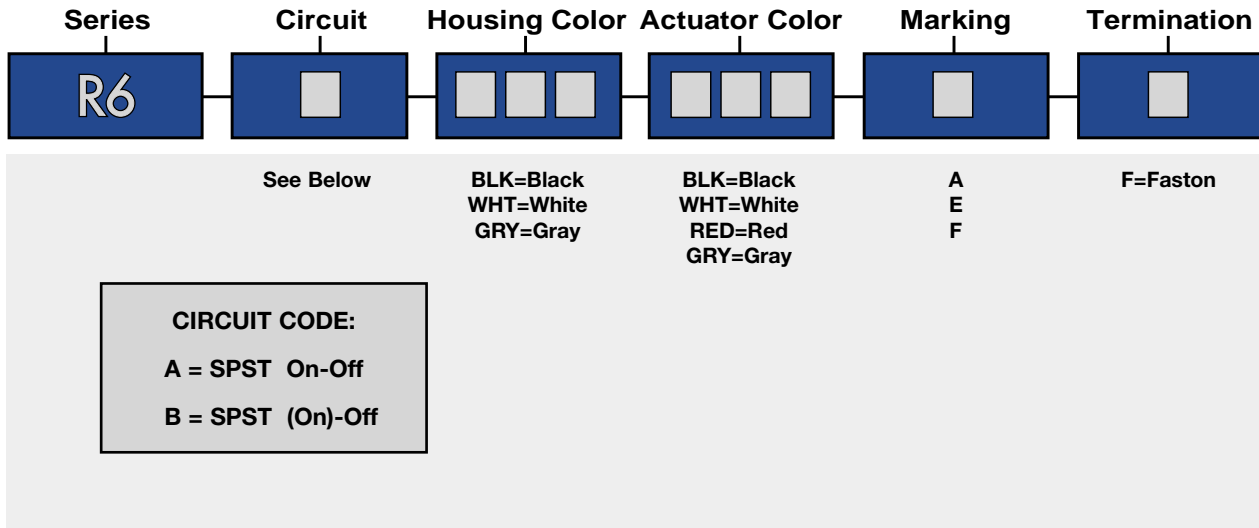

EXAMPLE



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

