

SHINDENGEN

Super Fast Recovery Rectifiers

Single

S3L40

400V 3A

FEATURES

- Low noise
- trr50ns
- Applicable to Automatic Insertion


APPLICATION

- Switching power supply
- Free Wheel
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

Case : AX14

(Unit : mm)

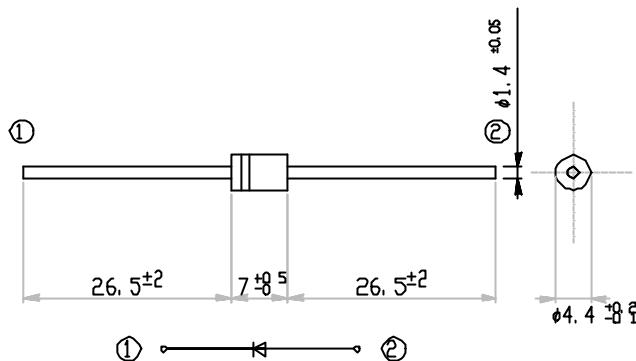

RATINGS

Absolute Maximum Ratings (If not specified TI=25)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-40 ~ 150	
Operating Junction Temperature	Tj		150	
Maximum Reverse Voltage	V _{RM}		400	V
Average Rectified Forward Current	I _o	50Hz sine wave, R-load, Without heatsink Ta=25	1.8	A
		50Hz sine wave, R-load, TI=123	3.0	
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25	60	A

Electrical Characteristics (If not specified TI=25)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =3.0A, Pulse measurement	Max.1.3	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement	Max.10	μA
Reverse Recovery Time	trr	I _F =0.5A, I _R =1A	Max.50	ns
Thermal Resistance	j _L	junction to lead	Max.6.5	/W
	j _A	junction to ambient	Max.60	


S3L40

Forward Voltage

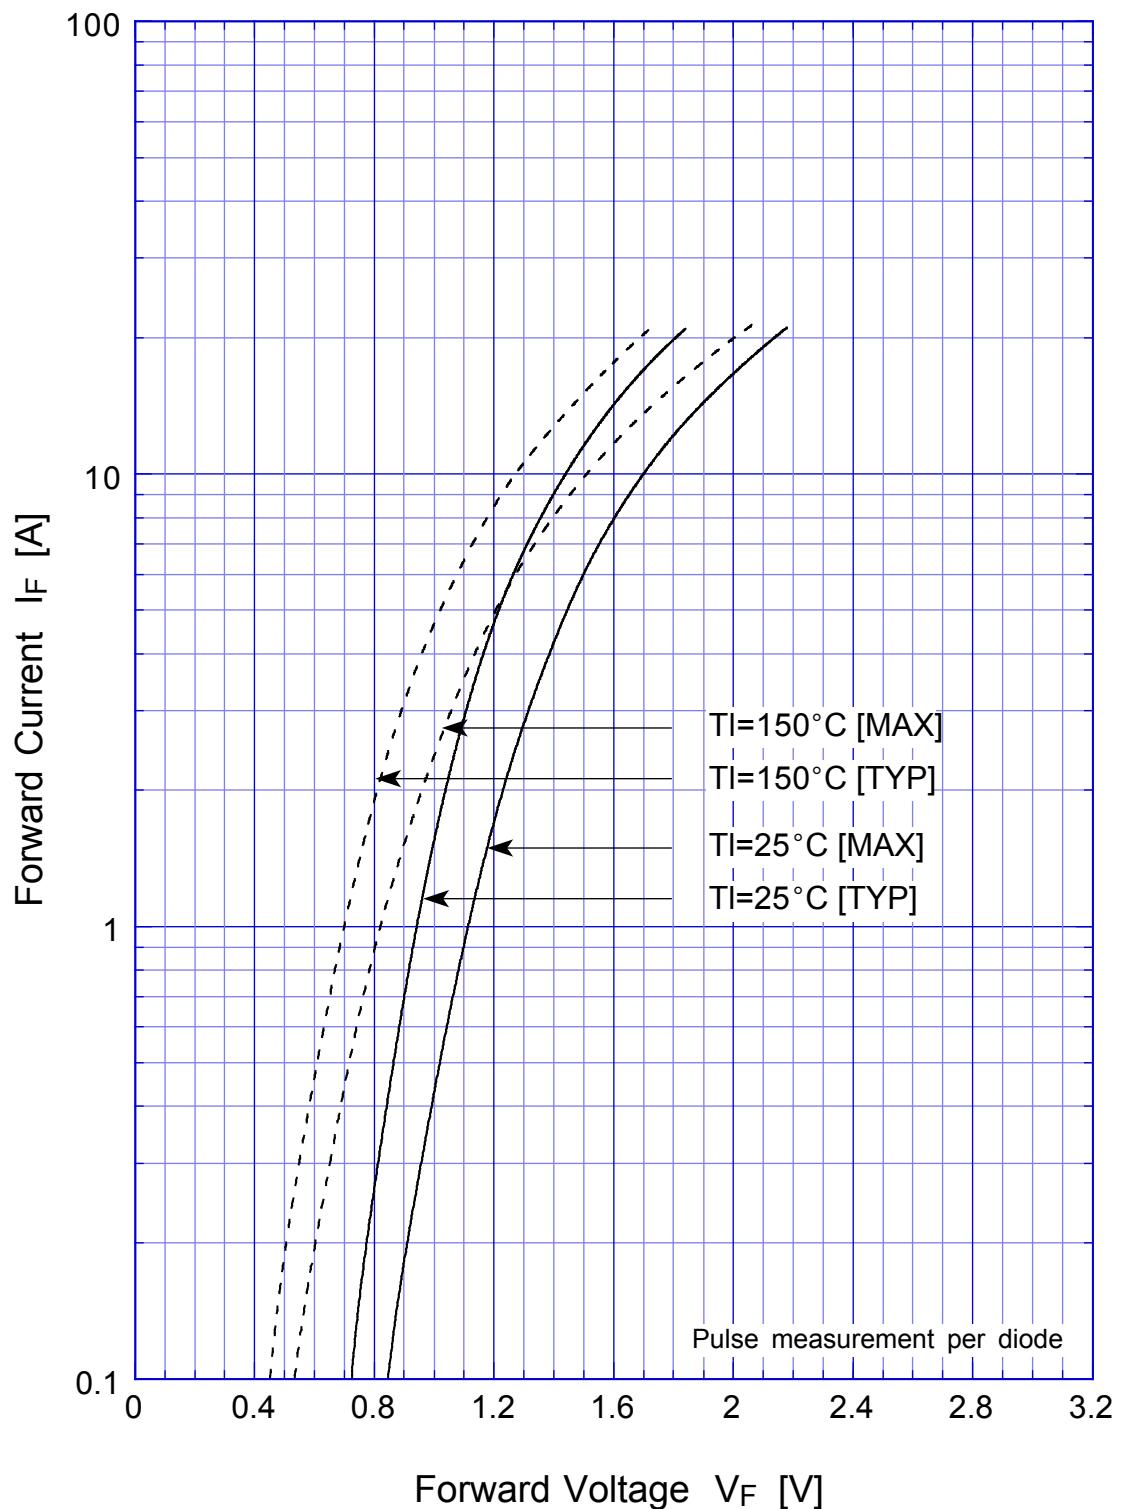




S3L40



Forward Power Dissipation

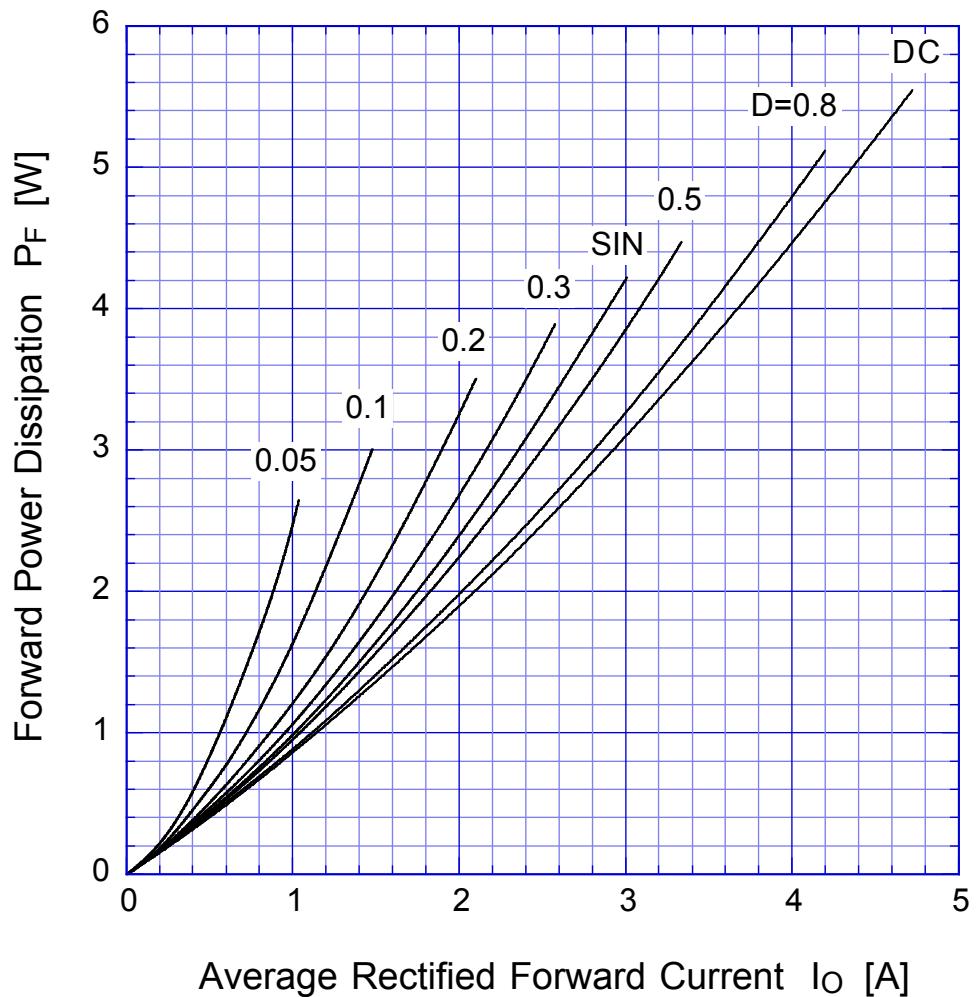

$T_j = T_{jmax}$

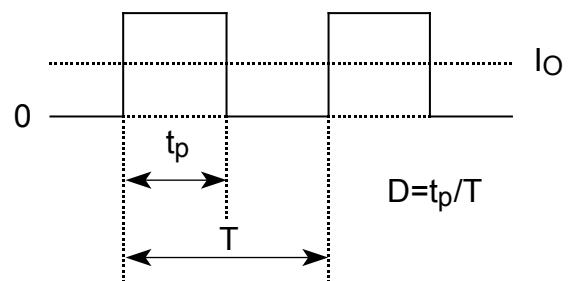

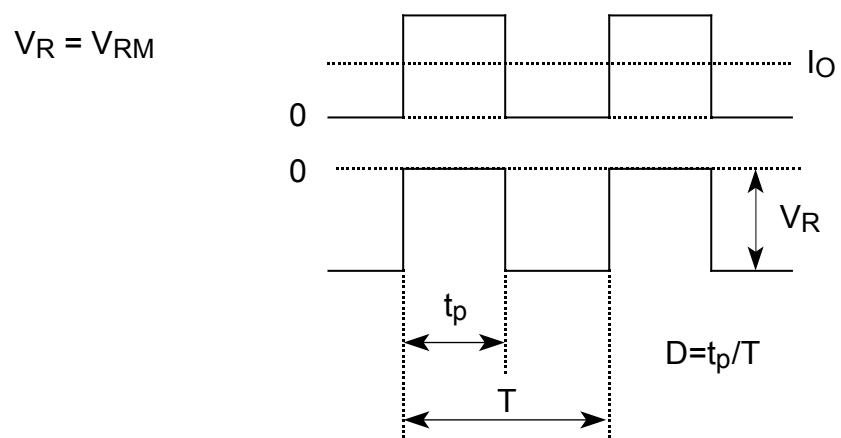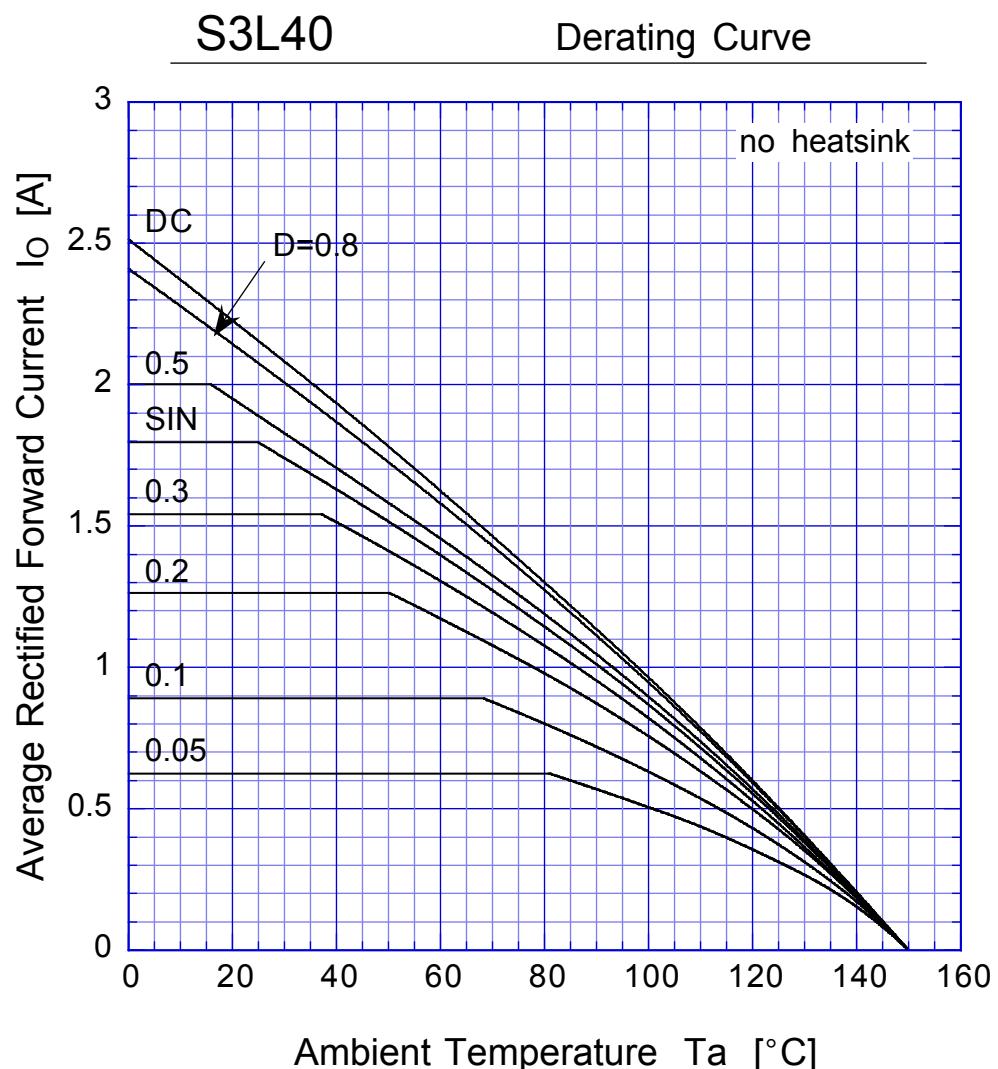

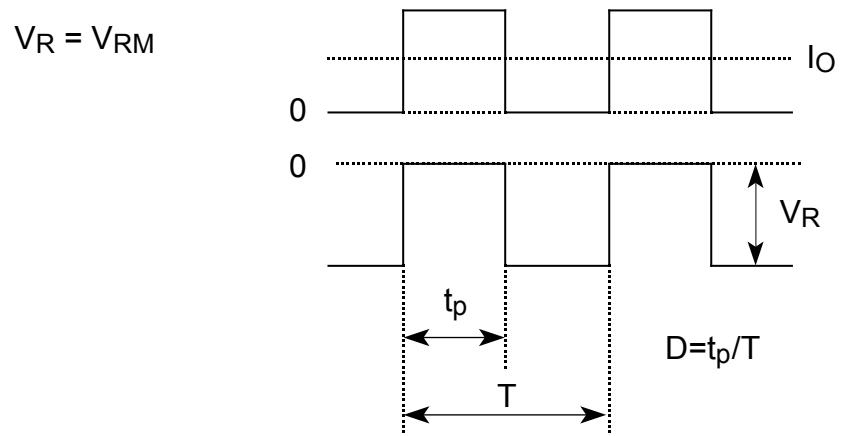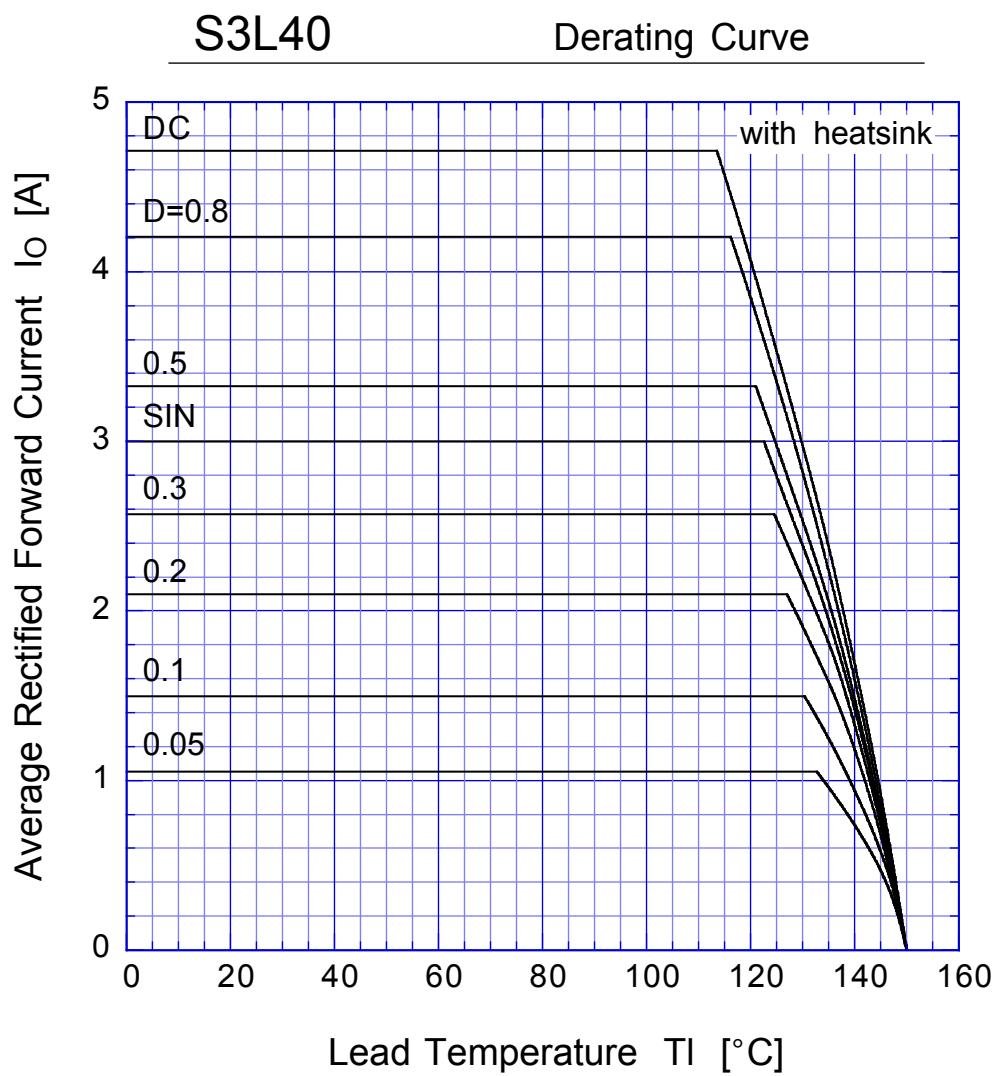

S3L40

Peak Surge Forward Capability

