

## Descriptions

The S78xx series are three-terminal positive regulators providing over 1A output current with internal current limiting, thermal shutdown and safe area protection. These regulators are useful in a wide range of applications. Although they are just fixed voltage regulators, the S78xx series can be used with external components to obtain adjustable voltages and currents.

## Features

- Internal Short Circuit Current Limiting
- Maximum Output Current (1A Max.)
- Thermal Overload Protection
- Output Transistor Safe Area Protection


## Ordering Information

Type NO.	Marking	Package Code
S78xxP	S78□□P	TO-220AB

□□:Voltage Code (05:5V, 06:6V, 08:8V, 09:9V, 10:10V, 12:12V, 15:15V, 24:24V)

## Outline Dimensions

unit : mm

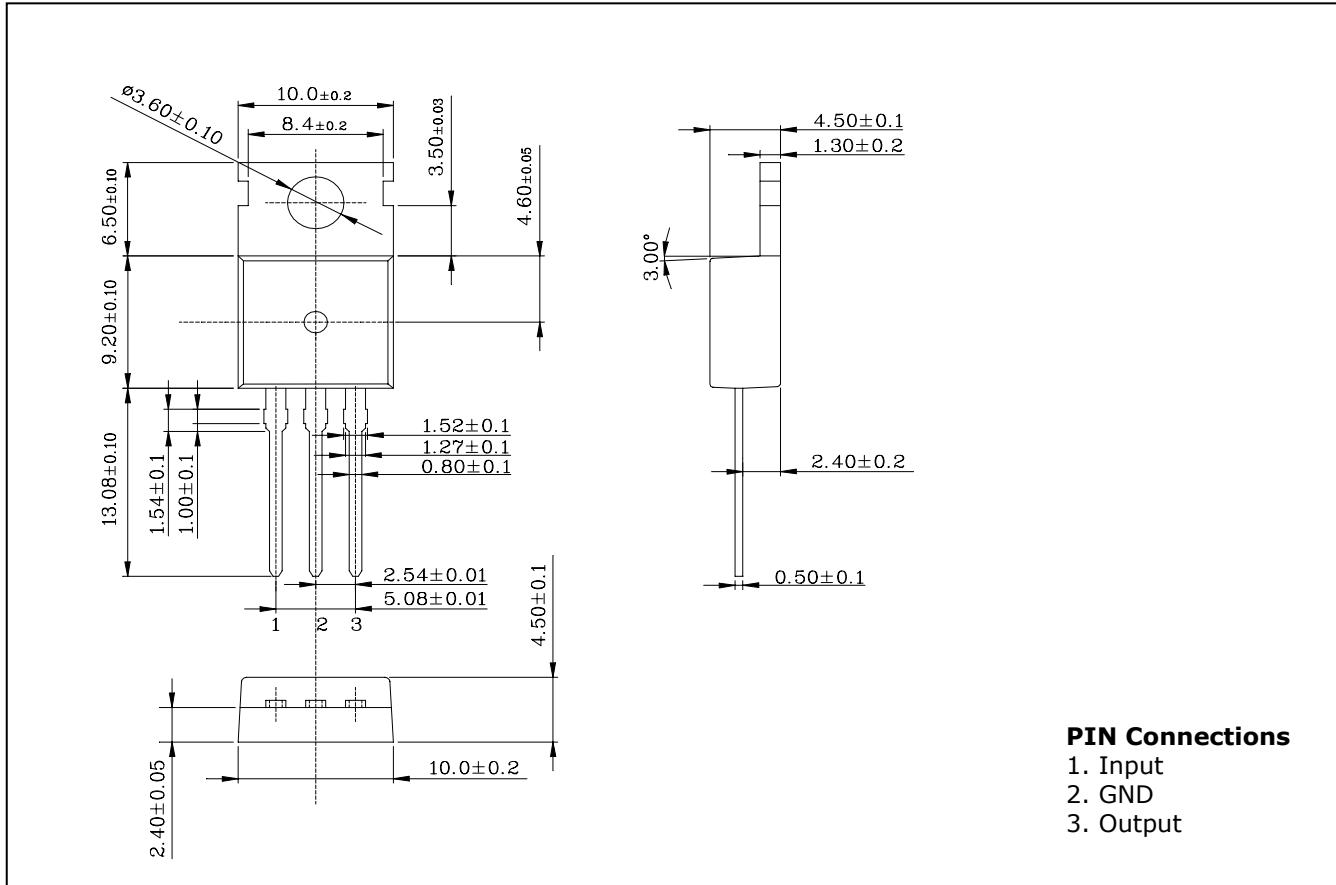

**Absolute Maximum Ratings**

Ta=25°C

Characteristic	Symbol	Ratings	Unit
Operating Input voltage	V <sub>IN</sub>	40 (S7824P)	V
		35 (ALL Others)	V
Power Dissipation (T <sub>C</sub> =25°C)	P <sub>D</sub>	20.8	W
Power Dissipation (without Heatsink)	P <sub>D</sub>	2.0	W
Operating Junction Temperature	T <sub>j</sub>	-30 ~ 125	°C
Storage Temperature	T <sub>stg</sub>	-55 ~ 150	°C

**Electrical Characteristics**(V<sub>IN</sub> = 10V, I<sub>OUT</sub> = 500mA, T<sub>j</sub> = 0°C ~ 125°C, Unless otherwise noted)

Characteristic	Symbol	Test Condition	S7805P			Unit
			Min.	Typ.	Max.	
Output Voltage	V <sub>OUT</sub>		T <sub>j</sub> = 25°C	4.8	5.0	5.2
		I <sub>OUT</sub> =5mA ~ 1A V <sub>IN</sub> =7.0V ~ 20V, P <sub>O</sub> ≤15W		4.75	5.0	5.25
Line Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =7.0V ~ 25V	T <sub>j</sub> = 25°C	-	3	100
		V <sub>IN</sub> =8.0V ~ 12V		-	1	50
Load Regulation	ΔV <sub>OUT</sub>	I <sub>OUT</sub> =5mA ~ 1.5A	T <sub>j</sub> = 25°C	-	15	100
		I <sub>OUT</sub> =250mA ~ 750mA		-	5	50
Quiescent Current	I <sub>B</sub>		T <sub>j</sub> = 25°C	-	4.2	8.0
Quiescent Current Change	ΔI <sub>B</sub>	V <sub>IN</sub> = 7.0V ~ 25V		-	-	1.3
		I <sub>OUT</sub> = 5mA ~ 1A		-	-	0.5
Output Noise Voltage	V <sub>N</sub>	f=10Hz ~ 100KHz	T <sub>j</sub> = 25°C	-	40	-
Ripple Rejection Ratio	RR	f=120Hz, V <sub>IN</sub> = 8.0V ~ 18V		62	78	-
Dropout Voltage	V <sub>D</sub>	I <sub>OUT</sub> =1A	T <sub>j</sub> = 25°C	-	2.0	-
Short Circuit Current Limit	I <sub>SC</sub>		T <sub>j</sub> = 25°C	-	0.75	-
Output Voltage Drift	TCvo	I <sub>OUT</sub> =5mA	T <sub>j</sub> = 25°C	-	-1.1	-
Peak Output Current	I <sub>PK</sub>		T <sub>j</sub> = 25°C	-	2.2	-

\* Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into separately.

## Electrical Characteristics

( $V_{IN} = 11V$ ,  $I_{OUT} = 500mA$ ,  $T_j = 0^\circ C \sim 125^\circ C$ , Unless otherwise noted)

Characteristic	Symbol	Test Condition	S7806P			Unit
			Min.	Typ.	Max.	
Output Voltage	$V_{OUT}$		$T_j = 25^\circ C$	5.75	6.0	6.25
		$I_{OUT}=5mA \sim 1A$ $V_{IN}=8.0V \sim 21V$ , $P_0 \leq 15W$		5.7	6.0	6.3
Line Regulation	$\Delta V_{OUT}$	$V_{IN}=8.0V \sim 25V$	$T_j = 25^\circ C$	-	5	120
		$V_{IN}=9.0V \sim 13V$		-	1.5	60
Load Regulation	$\Delta V_{OUT}$	$I_{OUT}=5mA \sim 1.5A$	$T_j = 25^\circ C$	-	14	120
		$I_{OUT}=250mA \sim 750mA$		-	4	60
Quiescent Current	$I_B$		$T_j = 25^\circ C$	-	4.3	8.0
Quiescent Current Change	$\Delta I_B$	$V_{IN} = 8.0V \sim 25V$		-	-	1.3
		$I_{OUT} = 5mA \sim 1A$		-	-	0.5
Output Noise Voltage	$V_N$	$f=10Hz \sim 100KHz$	$T_j = 25^\circ C$	-	45	-
Ripple Rejection Ratio	RR	$f=120Hz$ , $V_{IN} = 9.0V \sim 19V$		59	75	-
Dropout Voltage	$V_D$	$I_{OUT}=1A$	$T_j = 25^\circ C$	-	2.0	-
Short Circuit Current Limit	$I_{SC}$		$T_j = 25^\circ C$	-	0.55	-
Output Voltage Drift	TCvo	$I_{OUT}=5mA$	$T_j = 25^\circ C$	-	-0.8	-
Peak Output Current	$I_{PK}$		$T_j = 25^\circ C$	-	2.2	-

\* Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into separately.

## Electrical Characteristics

( $V_{IN} = 14V$ ,  $I_{OUT} = 500mA$ ,  $T_j = 0^\circ C \sim 125^\circ C$ , Unless otherwise noted)

Characteristic	Symbol	Test Condition		S7808P			Unit
				Min.	Typ.	Max.	
Output Voltage	$V_{OUT}$		$T_j = 25^\circ C$	7.7	8.0	8.3	V
			$I_{OUT}=5mA \sim 1A$ $V_{IN}=10.5V \sim 23V$ , $P_O \leq 15W$	7.6	8.0	8.4	
Line Regulation	$\Delta V_{OUT}$	$V_{IN}=10.5V \sim 25V$	$T_j = 25^\circ C$	-	6	160	mV
		$V_{IN}=11.0V \sim 17V$		-	2	80	
Load Regulation	$\Delta V_{OUT}$	$I_{OUT}=5mA \sim 1.5A$	$T_j = 25^\circ C$	-	12	160	mV
		$I_{OUT}=250mA \sim 750mA$		-	4	80	
Quiescent Current	$I_B$		$T_j = 25^\circ C$	-	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	$V_{IN} = 10.5V \sim 25V$		-	-	1.0	mA
		$I_{OUT} = 5mA \sim 1A$		-	-	0.5	
Output Noise Voltage	$V_N$	$f=10Hz \sim 100KHz$	$T_j = 25^\circ C$	-	52	-	$\mu V_{rms}$
Ripple Rejection Ratio	RR	$f=120Hz$ , $V_{IN} = 11.5V \sim 21.5V$		55	72	-	dB
Dropout Voltage	$V_D$	$I_{OUT}=1A$	$T_j = 25^\circ C$	-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$		$T_j = 25^\circ C$	-	0.45	-	A
Output Voltage Drift	TCvo	$I_{OUT}=5mA$	$T_j = 25^\circ C$	-	-0.8	-	$mV/^\circ C$
Peak Output Current	$I_{PK}$		$T_j = 25^\circ C$	-	2.2	-	A

\* Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into separately.

## Electrical Characteristics

( $V_{IN} = 16V$ ,  $I_{OUT} = 500mA$ ,  $T_j = 0^\circ C \sim 125^\circ C$ , Unless otherwise noted)

Characteristic	Symbol	Test Condition	S7809P			Unit	
			Min.	Typ.	Max.		
Output Voltage	$V_{OUT}$		$T_j = 25^\circ C$	8.65	9.0	9.35	V
		$I_{OUT} = 5mA \sim 1A$ $V_{IN} = 11.5V \sim 24V$ , $P_O \leq 15W$		8.55	9.0	9.45	
Line Regulation	$\Delta V_{OUT}$	$V_{IN} = 11.5V \sim 27V$	$T_j = 25^\circ C$	-	7	180	mV
		$V_{IN} = 13.0V \sim 19V$		-	2	90	
Load Regulation	$\Delta V_{OUT}$	$I_{OUT} = 5mA \sim 1.5A$	$T_j = 25^\circ C$	-	12	180	mV
		$I_{OUT} = 250mA \sim 750mA$		-	4	90	
Quiescent Current	$I_B$		$T_j = 25^\circ C$	-	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	$V_{IN} = 11.5V \sim 27V$		-	-	1.0	mA
		$I_{OUT} = 5mA \sim 1A$		-	-	0.5	
Output Noise Voltage	$V_N$	$f = 10Hz \sim 100KHz$	$T_j = 25^\circ C$	-	60	-	uV <sub>rms</sub>
Ripple Rejection Ratio	RR	$f = 120Hz$ , $V_{IN} = 12V \sim 22V$		55	70	-	dB
Dropout Voltage	$V_D$	$I_{OUT} = 1A$	$T_j = 25^\circ C$	-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$		$T_j = 25^\circ C$	-	0.4	-	A
Output Voltage Drift	TCvo	$I_{OUT} = 5mA$	$T_j = 25^\circ C$	-	-1.0	-	mV/°C
Peak Output Current	$I_{PK}$		$T_j = 25^\circ C$	-	2.2	-	A

\* Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into separately.

## Electrical Characteristics

( $V_{IN} = 17V$ ,  $I_{OUT} = 500mA$ ,  $T_j = 0^\circ C \sim 125^\circ C$ , Unless otherwise noted)

Characteristic	Symbol	Test Condition		S7810P			Unit
				Min.	Typ.	Max.	
Output Voltage	$V_{OUT}$		$T_j = 25^\circ C$	9.6	10.0	10.4	V
			$I_{OUT} = 5mA \sim 1A$ $V_{IN} = 12.5V \sim 25V$ , $P_O \leq 15W$	9.5	10.0	10.5	
Line Regulation	$\Delta V_{OUT}$	$V_{IN} = 12.5V \sim 28V$	$T_j = 25^\circ C$	-	7	200	mV
		$V_{IN} = 14.0V \sim 20V$		-	2	100	
Load Regulation	$\Delta V_{OUT}$	$I_{OUT} = 5mA \sim 1.5A$	$T_j = 25^\circ C$	-	12	200	mV
		$I_{OUT} = 250mA \sim 750mA$		-	4	100	
Quiescent Current	$I_B$		$T_j = 25^\circ C$	-	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	$V_{IN} = 12.5V \sim 28V$		-	-	1.0	mA
		$I_{OUT} = 5mA \sim 1A$		-	-	0.5	
Output Noise Voltage	$V_N$	$f = 10Hz \sim 100KHz$	$T_j = 25^\circ C$	-	70	-	uV <sub>rms</sub>
Ripple Rejection Ratio	RR	$f = 120Hz$ , $V_{IN} = 13V \sim 23V$		55	71	-	dB
Dropout Voltage	$V_D$	$I_{OUT} = 1A$	$T_j = 25^\circ C$	-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$		$T_j = 25^\circ C$	-	0.4	-	A
Output Voltage Drift	TCvo	$I_{OUT} = 5mA$	$T_j = 25^\circ C$	-	-1.0	-	mV/°C
Peak Output Current	$I_{PK}$		$T_j = 25^\circ C$	-	2.2	-	A

\* Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into separately.

## Electrical Characteristics

( $V_{IN} = 19V$ ,  $I_{OUT} = 500mA$ ,  $T_j = 0^\circ C \sim 125^\circ C$ , Unless otherwise noted)

Characteristic	Symbol	Test Condition	S7812P			Unit	
			Min.	Typ.	Max.		
Output Voltage	$V_{OUT}$		$T_j = 25^\circ C$	11.5	12.0	12.5	V
		$I_{OUT} = 5mA \sim 1A$ $V_{IN} = 14.5V \sim 30V$ , $P_O \leq 15W$		11.4	12.0	12.6	
Line Regulation	$\Delta V_{OUT}$	$V_{IN} = 14.5V \sim 30V$	$T_j = 25^\circ C$	-	10	240	mV
		$V_{IN} = 16.0V \sim 22V$		-	3	120	
Load Regulation	$\Delta V_{OUT}$	$I_{OUT} = 5mA \sim 1.5A$	$T_j = 25^\circ C$	-	12	240	mV
		$I_{OUT} = 250mA \sim 750mA$		-	4	120	
Quiescent Current	$I_B$		$T_j = 25^\circ C$	-	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	$V_{IN} = 14.5V \sim 30V$		-	-	1.0	mA
		$I_{OUT} = 5mA \sim 1A$		-	-	0.5	
Output Noise Voltage	$V_N$	$f = 10Hz \sim 100KHz$ ,	$T_j = 25^\circ C$	-	75	-	uV <sub>rms</sub>
Ripple Rejection Ratio	RR	$f = 120Hz$ , $V_{IN} = 15V \sim 25V$		55	71	-	dB
Dropout Voltage	$V_D$	$I_{OUT} = 1A$	$T_j = 25^\circ C$	-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$		$T_j = 25^\circ C$	-	0.35	-	A
Output Voltage Drift	TCvo	$I_{OUT} = 5mA$	$T_j = 25^\circ C$	-	-1.0	-	mV/°C
Peak Output Current	$I_{PK}$		$T_j = 25^\circ C$	-	2.2	-	A

\* Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into separately.

## Electrical Characteristics

( $V_{IN} = 23V$ ,  $I_{OUT} = 500mA$ ,  $T_j = 0^\circ C \sim 125^\circ C$ , Unless otherwise noted)

Characteristic	Symbol	Test Condition	S7815P			Unit	
			Min.	Typ.	Max.		
Output Voltage	$V_{OUT}$		$T_j = 25^\circ C$	14.4	15.0	15.6	V
		$I_{OUT} = 5mA \sim 1A$ $V_{IN} = 17.5V \sim 30V$ , $P_O \leq 15W$		14.25	15.0	15.75	
Line Regulation	$\Delta V_{OUT}$	$V_{IN} = 17.5V \sim 30V$	$T_j = 25^\circ C$	-	12	300	mV
		$V_{IN} = 20V \sim 26V$		-	3	150	
Load Regulation	$\Delta V_{OUT}$	$I_{OUT} = 5mA \sim 1.5A$	$T_j = 25^\circ C$	-	12	300	mV
		$I_{OUT} = 250mA \sim 750mA$		-	4	150	
Quiescent Current	$I_B$		$T_j = 25^\circ C$	-	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	$V_{IN} = 17.5V \sim 30V$		-	-	1.0	mA
		$I_{OUT} = 5mA \sim 1A$		-	-	0.5	
Output Noise Voltage	$V_N$	$f = 10Hz \sim 100KHz$ ,	$T_j = 25^\circ C$	-	90	-	uV <sub>rms</sub>
Ripple Rejection Ratio	RR	$f = 120Hz$ , $V_{IN} = 18.5V \sim 28.5V$		54	70	-	dB
Dropout Voltage	$V_D$	$I_{OUT} = 1A$	$T_j = 25^\circ C$	-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$		$T_j = 25^\circ C$	-	0.23	-	A
Output Voltage Drift	TCvo	$I_{OUT} = 5mA$	$T_j = 25^\circ C$	-	-1.0	-	mV/°C
Peak Output Current	$I_{PK}$		$T_j = 25^\circ C$	-	2.1	-	A

\* Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into separately.


## Electrical Characteristics

( $V_{IN} = 33V$ ,  $I_{OUT} = 500mA$ ,  $T_j = 0^\circ C \sim 125^\circ C$ , Unless otherwise noted)

Characteristic	Symbol	Test Condition	S7824P			Unit
			Min.	Typ.	Max.	
Output Voltage	$V_{OUT}$		$T_j = 25^\circ C$	23.0	24.0	25.0
		$I_{OUT} = 5mA \sim 1A$ $V_{IN} = 27V \sim 38V$ , $P_0 \leq 15W$		22.8	24.0	25.2
Line Regulation	$\Delta V_{OUT}$	$V_{IN} = 27V \sim 38V$	$T_j = 25^\circ C$	-	18	480
		$V_{IN} = 30V \sim 36V$		-	6	240
Load Regulation	$\Delta V_{OUT}$	$I_{OUT} = 5mA \sim 1.5A$	$T_j = 25^\circ C$	-	12	480
		$I_{OUT} = 250mA \sim 750mA$		-	4	240
Quiescent Current	$I_B$		$T_j = 25^\circ C$	-	4.6	8.0
Quiescent Current Change	$\Delta I_B$	$V_{IN} = 27V \sim 38V$		-	-	1.0
		$I_{OUT} = 5mA \sim 1A$		-	-	0.5
Output Noise Voltage	$V_N$	$f = 10Hz \sim 100KHz$ ,	$T_j = 25^\circ C$	-	170	$\mu V_{rms}$
Ripple Rejection Ratio	RR	$f = 120Hz$ , $V_{IN} = 28V \sim 38V$		50	66	-
Dropout Voltage	$V_D$	$I_{OUT} = 1A$	$T_j = 25^\circ C$	-	2.0	-
Short Circuit Current Limit	$I_{SC}$		$T_j = 25^\circ C$	-	0.15	-
Output Voltage Drift	TCvo	$I_{OUT} = 5mA$	$T_j = 25^\circ C$	-	-1.5	-
Peak Output Current	$I_{PK}$		$T_j = 25^\circ C$	-	2.1	-


\* Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into separately.

## ■ Test circuit

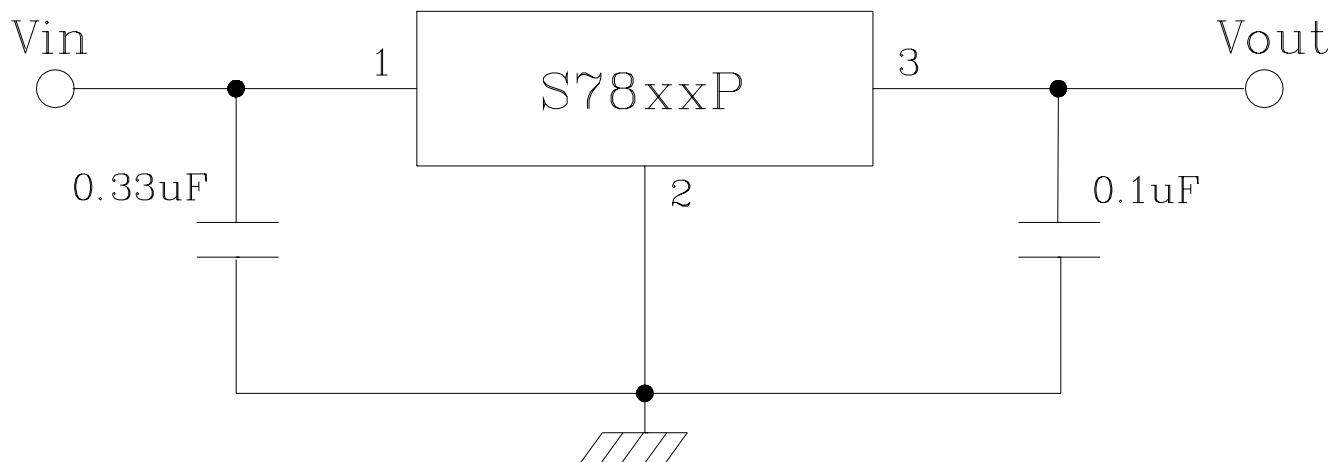


## Electrical Characteristic Curves


**Fig. 1  $V_D$  VS  $T_i$**

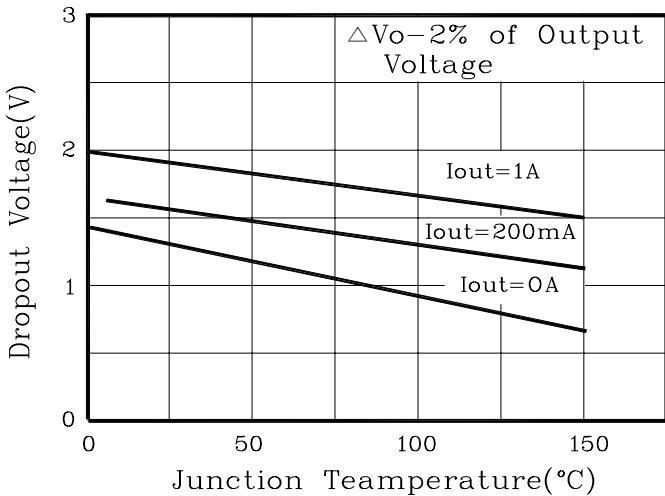


**Fig. 2  $I_{out}$  VS  $|V_{in} - V_{out}|$**

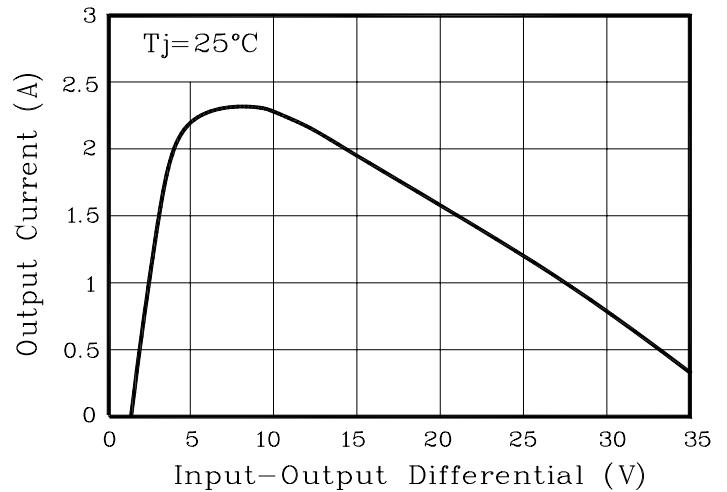


**Fig. 3  $P_D$  vs  $T_a$**

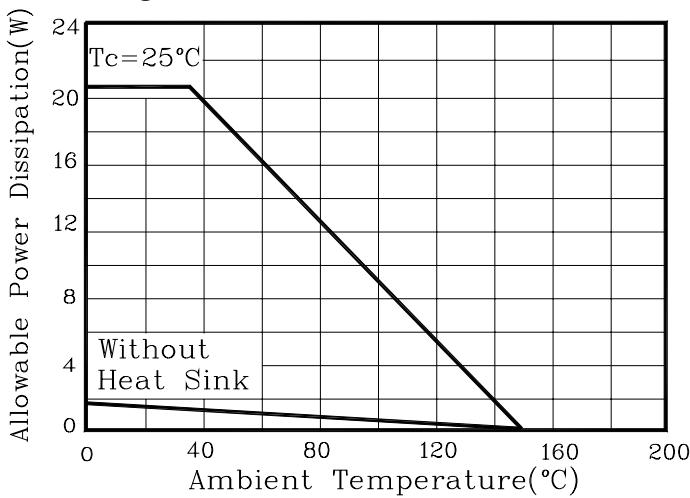

**Fig. 4  $I_{QC}$  vs  $V_{in}$**

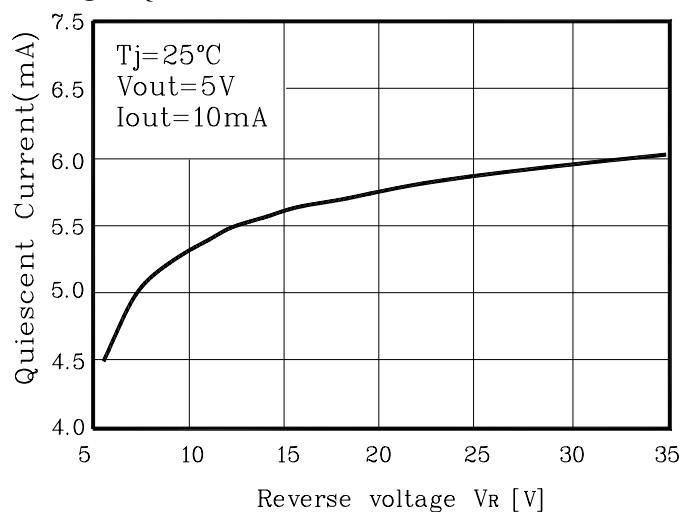

**Fig. 5 Ripple Rejection**

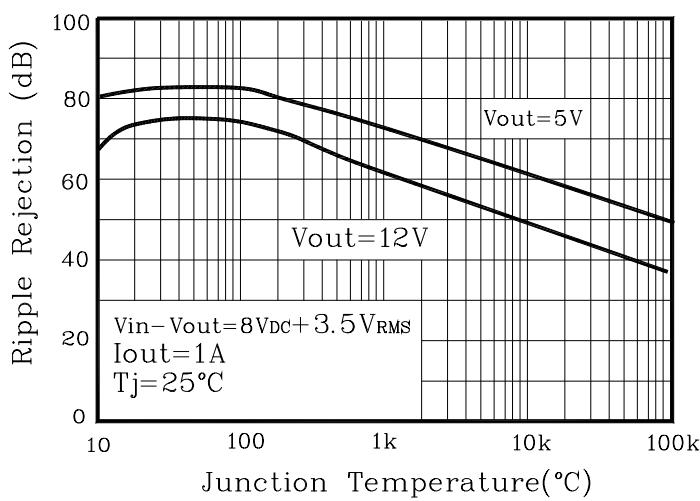

**These AUK products are intended for usage in general electronic equipments(Office and communication equipment, measuring equipment, domestic electrification, etc.).**

**Please make sure that you consult with us before you use these AUK products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, traffic signal, combustion central, all types of safety device, etc.).**

**AUK cannot accept liability to any damage which may occur in case these AUK products were used in the mentioned equipments without prior consultation with AUK.**