

APPLICATIONS

- ✓ RS-232 and RS-423 Data Lines
- ✓ Telecommunications T/R Protection: ISDN, ADSL, V.34/V.90, HDLC, T1/E1 & T3/E3
- ✓ Low & High Speed Data Lines: Ethernet & Token Ring
- ✓ I/O Port Protection

IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 24A, 8/20 μ s - Level 2(Line-Gnd) & Level 3(Line-Line)

FEATURES


- ✓ Series A: 800 Watts Peak Pulse Power per Line (tp=8/20 μ s)
- ✓ Series B: 3,400 Watts Peak Pulse Power per Line (tp=8/20 μ s)
- ✓ ESD Protection > 40 kilovolts
- ✓ High Surge Capability & Low Capacitance Option
- ✓ Protects 8 to 9 Bidirectional Data Lines
- ✓ Available in Several Voltages Types Ranging from 5V to 36V

MECHANICAL CHARACTERISTICS

- ✓ Molded Plastic VSIP® Package
- ✓ Weight 1.5 grams (Approximate)
- ✓ Flammability Rating UL 94V-0
- ✓ Marking: Logo, Part Number, Date Code & Pin One Defined By Dot on Top of Package

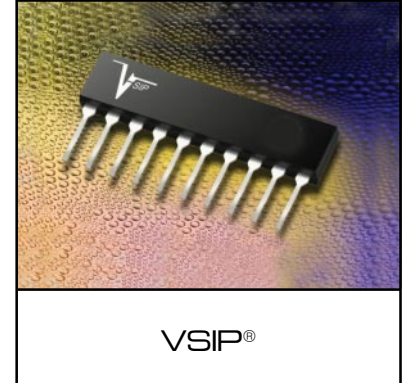

PIN CONFIGURATIONS

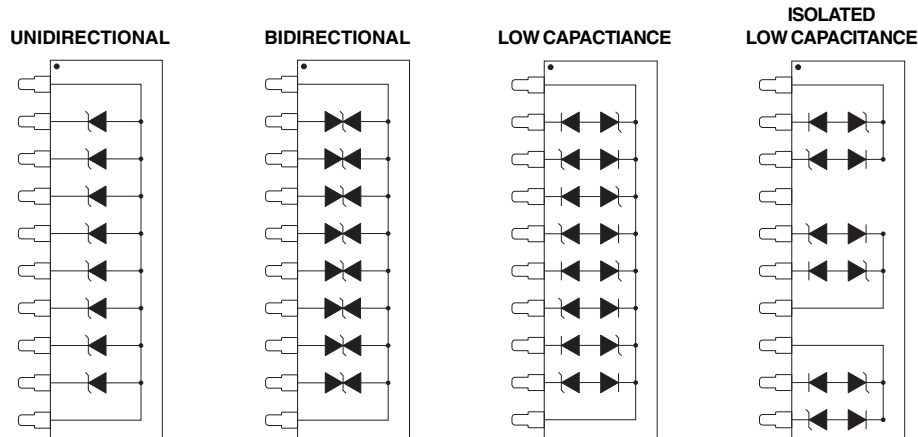

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Series A Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	800	Watts
Series B Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	3400	Watts
Operating Temperature	T_J	-55°C to 150°C	°C
Storage Temperature	T_{STG}	-55°C to 150°C	°C

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified									
RATED STAND-OFF VOLTAGE (See Notes 1-3) V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA $V_{(BR)}$ VOLTS	SERIES A				SERIES B			
		MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_p = 1A$ V_c VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_p = 10A$ V_c VOLTS	MAXIMUM LEAKAGE CURRENT @ V_{WM} I_b μA	MAXIMUM PEAK PULSE CURRENT (See Fig. 2) I_{PP} AMPS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_p = 1A$ V_c VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_p = 10A$ V_c VOLTS	MAXIMUM LEAKAGE CURRENT @ V_{WM} I_b μA	MAXIMUM PEAK PULSE CURRENT (See Fig. 2) I_{PP} AMPS
5.0	6.0	9.8	12.5	100	45	8.6	9.1	300	300
8.0	8.5	13.4	16.6	10	40	10.9	12.0	200	258
12.0	13.3	19.5	22.7	1	34	17.0	18.8	2	184
15.0	16.7	24.4	28.5	1	27	21.4	23.6	2	147
24.0	26.7	39.1	45.6	1	22	34.2	37.8	2	111
28.0	31.1	-	-	-	-	39.8	40.0	2	93
33.0	36.7	-	-	-	-	47.0	51.9	2	83
36.0	40.0	-	-	-	-	51.2	56.6	2	68

Note 1: For voltage types not shown on the product data sheet, consult the factory.

Note 2: The low capacitance configuration values for each bidirectional line pair is as follows:
Series "A" C = 25pF Series "B" C = 100pF

Note 3: Forward voltage (*unidirectional configurations only*):
Series "A": $V_F = 1.5V @ 200mA$ Series "B": $V_F = 1.5V @ 200mA$


STANDARD PRODUCT ORDERING BY PART NUMBER

Unidirectional - VS10Pxx (A Series), VSB10Pxx (B Series)
Bidirectional - VS10PxxC (A Series), VSB10PxxC (B Series)
Low Capacitance - VS10PxxLC (A Series), VSB10PxxLC (B Series)
Isolated Low Capacitance- VS10PxxLCI (A Series), VSB10PxxLCI (B Series)


xx = Selected Voltage

GRAPHS


**FIGURE 1
PEAK PULSE POWER VS PULSE TIME**

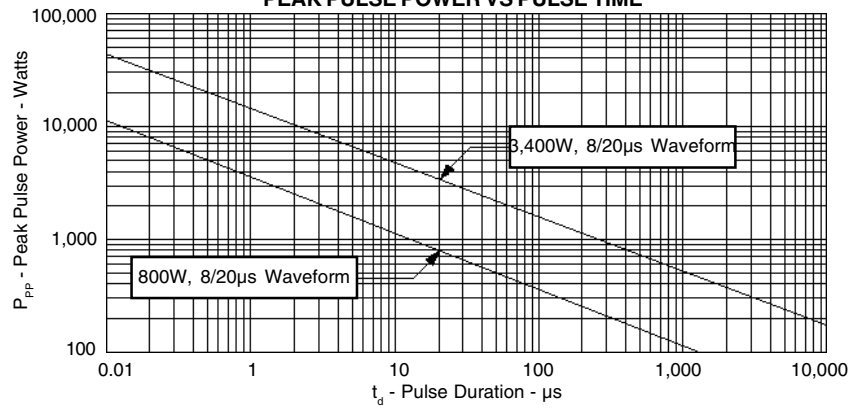


**FIGURE 2
PULSE WAVE FORM**

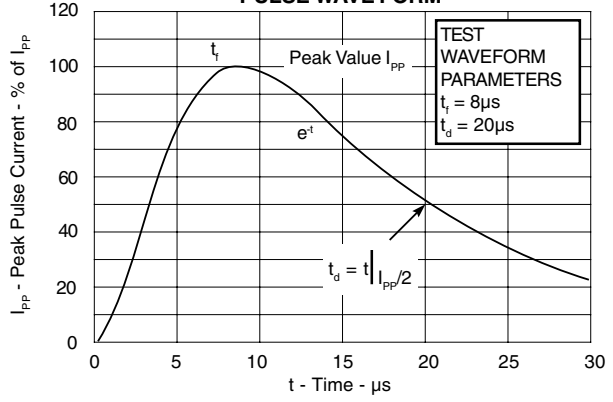

**FIGURE 3
POWER DERATING CURVE**

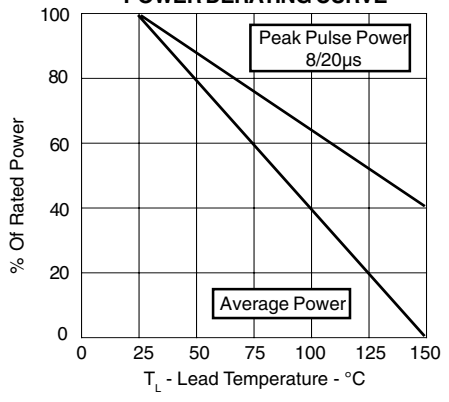

**FIGURE 4
TYPICAL LOW CAPACITANCE CURVE**

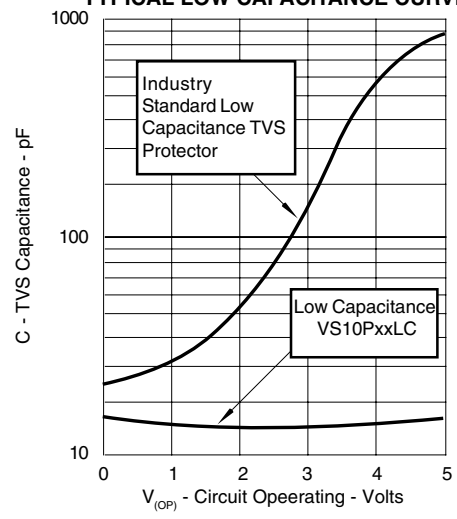

PACKAGE OUTLINE & DIMENSIONS

PACKAGE OUTLINE		VSIP® PACKAGE			
VSIP DIMENSIONS					
DIM	MILLIMETERS		INCHES		
	MIN	MAX	MIN	MAX	
A	25.81	26.01	1.016	1.024	
B	6.25	6.45	0.246	0.254	
C	5.92	6.02	0.233	0.237	
D	0.406	0.508	0.016	0.020	
E	1.47	1.57	0.058	0.062	
F	2.49	2.59	0.098	0.102	
G	0.38	1.02	0.015	0.040	
H	3.20	3.40	0.126	0.134	
I	7° TYP	7° TYP	7° TYP	7° TYP	
J	1.47	1.57	0.058	0.062	
K	0.20	0.30	0.008	0.012	
L	1.47	1.57	0.058	0.062	
NOTES					
1. Dimensions are exclusive of mold flash and metal burrs.					
BULK ORDERING NOMENCLATURE					
1. Product Shipped in Tubes of 18 pcs per Tube.					
Outline & Dimensions: Rev 1 - 11/01, 06016					

COPYRIGHT © ProTek Devices 2005
 SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices
 2929 South Fair Lane, Tempe, AZ 85282
 Tel: 602-431-8101 Fax: 602-431-2288
 E-Mail: sales@protekdevices.com
 Web Site: www.protekdevices.com