

# XB15A204



## PIN DIODE

- ◆ Long Carrier Lifetime
- ◆ Low Distortion
- ◆ Large Dynamic Range


## Applications

- Car Radio RF Attenuators
- Filter Switches
- CATV RF Attenuators

## General Description

The XB15A204 PIN diode employs a high reliability glass package that is designed for RF small signal attenuators in VHF, UHF appliances.

## Dimensions



## Absolute Maximum Ratings

Ta=25 °C


SYMBOL	PARAMETER	RATINGS	UNITS
VRM	Repetitive Peak Reverse Voltage	30	V
VR	Reverse Voltage	28	V
P	Power Dissipation	200	mW
Tj	Junction Temperature	175	°C
Tstg	Storage Temperature	-55 ~ 175	°C

## Electrical Characteristics


Ta=25°C

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS			UNITS
			MIN	TYP	MAX	
IR1	Reverse Current	VR = 30V			10	μA
IR2		VR = 28V			0.5	μA
VF	Forward Voltage	IF = 100mA			1.0	V
rfs1	Forward Series Resistance	IF = 10mA, f = 50MHz		5.5	10	Ω
rfs2		IF = 10μA, f = 50MHz	1.0	2.0		kΩ
Ct	Diode Capacitance	VR = 15V, f = 1.0MHz		0.7	1.2	pF
τ	Life Time	IF = 10mA		2.1		μS
ts	Storage Time	IF = 10mA, I R = 10mA	0.6	1.5		μS


**FORWARD CURRENT vs. FORWARD VOLTAGE**

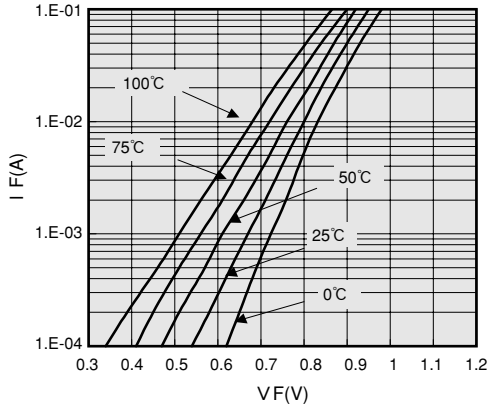


**REVERSE CURRENT vs. REVERSE VOLTAGE**

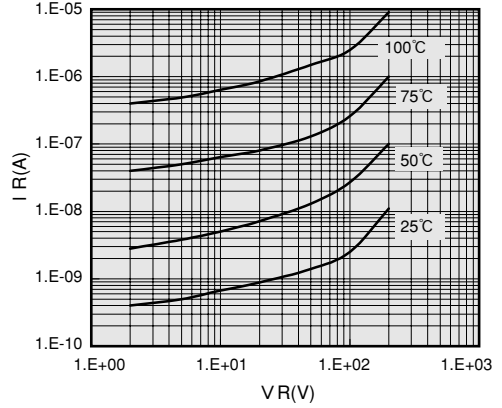

**FORWARD SERIES RESISTANCE vs. FORWARD CURRENT**

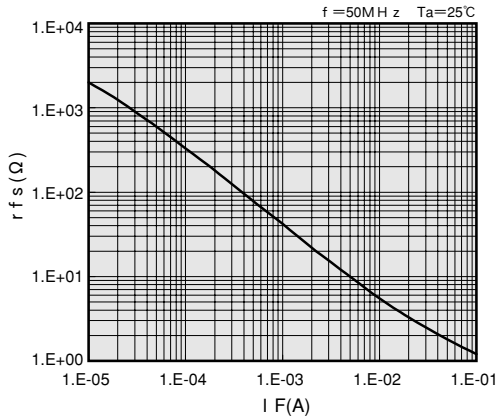

**DIODE CAPACITANCE vs. REVERSE VOLTAGE**

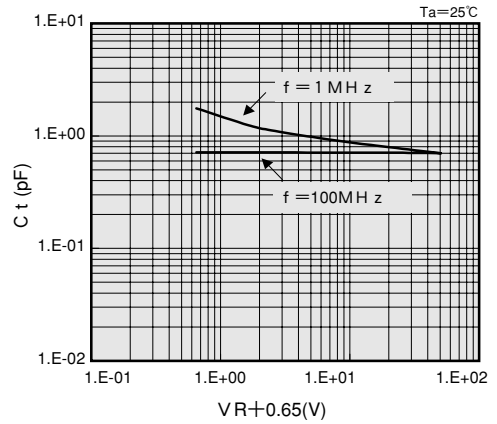

**PARALLEL RESISTANCE vs. REVERSE VOLTAGE**

