




6-pack IGBT Module

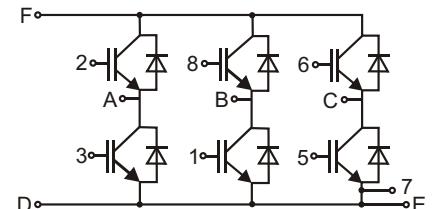

| Type | V_{CES} | I_C | I_{CM} | $V_{CE(sat)}$ | $t_{d(on)}$ | $t_{d(off)}$ | t_f | $T_{J\max}$ | V_{isol} | R_{thJC} |
|-------------|-----------|-------|----------|---------------|-------------|--------------|-------|-------------|------------|------------|
| | V | A | A | V | ns | ns | ns | °C | V | K/W |
| SMPS6-40-12 | 1200 | 40 | 80 | 1.8 | 55 | 420 | 70 | 150 | 2500 | 0.60 |

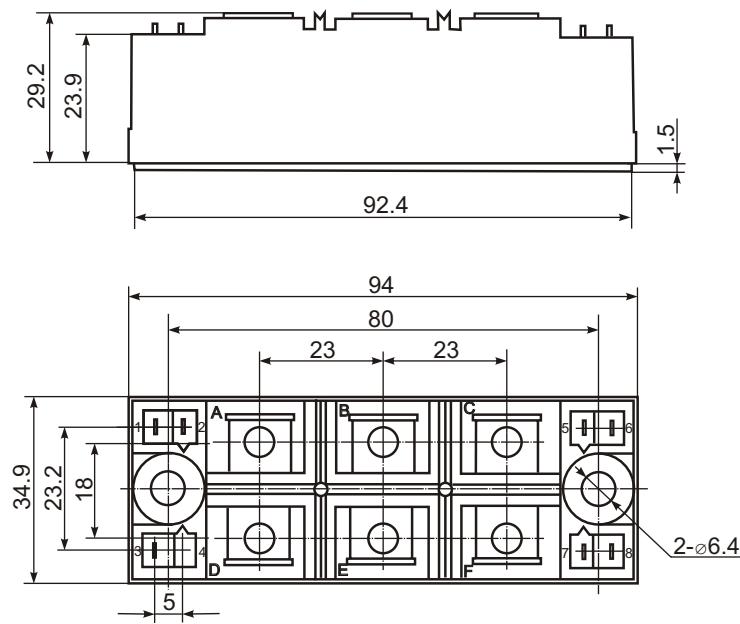

Features:

- Industrial standard package
- Heat transfer through aluminium nitride ceramic isolated metal baseplate
- Precise internal pressure contacts for high reliability
- 2500V RMS isolation voltage

Typical Applications:

- DC motor control
- AC motor soft starter
- Temperature control (e.g. for ovens, chemical processes)
- Lighting control