

Specification	AXHV0002	Issue: 02	Date: 2008-04-15
----------------------	-----------------	-----------	------------------

Oscillator type : VCO – Voltage Controlled Oscillator

Parameter	min.	typ.	max.	Unit	Condition
Frequency tuning range	360		610	MHz	@ 25°C
Frequency adjustment range					
EFC voltage V_C	1		11	V	
Tuning sensitivity	10	32	40	MHz/V	
EFC slope ($\Delta f / \Delta V_C$)	positive				
RF output					
Signal waveform	SINUS				
Load	50			Ω	
Amplitude	+4	+5	+8	dBm	$R_L = 50 \Omega$
Harmonics attenuation	12	17		dBc	
Phase Noise		-107	-103	dBc/Hz	@ 100 kHz
Supply voltage V_S	4.75	5	5.25	V	
Current consumption (steady state)		24	26	mA	
Operating temperature range	-40		+85	°C	
Operable temperature range	-45		+90	°C	
Storage temperature range	-45		+95	°C	
Enclosure (see drawing) LxWxH	12.7 x 12.7 x 6.1			mm	
Weight			5	gram	
Packing	bulk				IEC 60286-3
ESD Sensitivity	1500			V	HBM, IEC 61000-4-2


Notes:

1. Terminology and test conditions are according to IEC standard IEC60679-1, unless otherwise stated

Ordering Code:

Model (Specification)	Frequency Range [MHz]
AXHV0002	360-610

Enclosure drawing

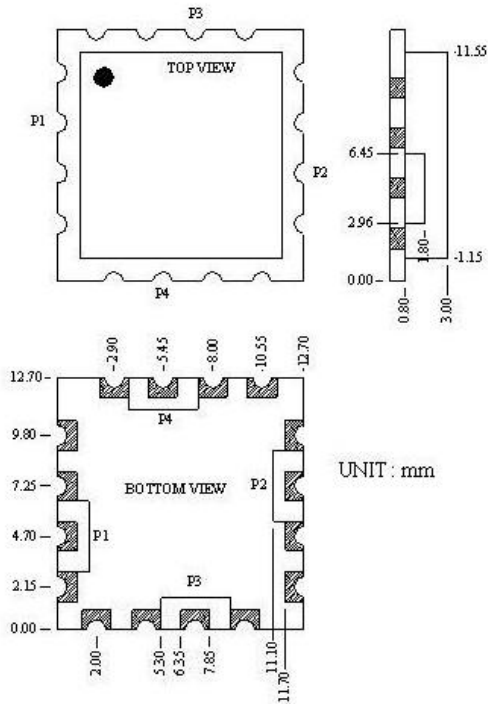

Pin connections

Pin #	Symbol	Function
P1	V _C	Control Voltage (EFC)
P2	RF OUT	RF Output
P3	V _S	Supply Voltage
P4	N.C.	Not Connected
All others	GND	Ground

Note:

Drawing may not show appearance in detail

Environmental conditions

Test	IEC 60068 Part ...	IEC 60679-1 clause ...	Test conditions
Visual inspection, dimensions		4.3	Enclosure styles as in IEC 60679-3 or 61837, if applicable
Sealing tests (if applicable)	2-17	4.6.2	Gross leak: Test Qc, Fine leak: Test Qk
Solderability	2-20	4.6.3	Test Ta (235 ± 5)°C Method 1
Resistance to soldering heat	2-58		Test Tb Method 1A, 5s
Shock*	2-27	4.6.8	Test Ea, 3 x per axes 100g, 6 ms half-sine pulse
Bump*	2-29	4.6.6	Test Eb, 4000 bumps per Axes, 40g, 6 ms
Free fall*	2-32	4.6.9	Test Ed procedure 1, 2 drops from 1m height
Vibration, sinusoidal*	2-6	4.6.7	Test Fc, 30 min per axes, 10 Hz - 55 Hz 0,75mm; 55 Hz - 2 kHz, 10g
Rapid change of temperature	2-14	4.6.5	Test Na, 10 cycles at extremes of operating temperature range
Dry heat	2-2	4.6.14	Test Ba, 16 h at upper temperature indicated by climatic category
Damp heat, cyclic*	2-30	4.6.15	Test Db variant 1 severity b), 55°C/95% r.H., 6 cycles
Cold	2-1	4.6.16	Test Aa, 2 h at lower temperature indicated by climatic category
Climatic sequence*	1-7	4.6.17	Sequence of 4.6.14, 4.6.15 (1 st cycle), 4.6.16, 4.6.15 (5 cycles)
Damp heat, steady state*	2-3	4.6.18	Test Ca, 56 days
Endurance tests			
- ageing		4.7.1	30 days @ 85°C, OCXO @25°C
- extended aging		4.7.2	1000h, 2000h, 8000h @85°C