



Features

- ✧ For IF SAW filter
- ✧ High attenuation
- ✧ Single-ended operation
- ✧ Dual In-line Package
- ✧ RoHS compliant (2002/95/EC), Pb-free

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	106.8	107	107.2
Insertion Loss	dB	-	29	31
1.5 dB Bandwidth	MHz	24.3	24.42	-
3 dB Bandwidth	MHz	-	24.59	-
35 dB Bandwidth	MHz	-	25.4	25.6
40 dB Bandwidth	MHz	-	25.45	-
45 dB Bandwidth	MHz	-	25.5	25.9
50 dB Bandwidth	MHz	-	25.56	26.7
Passband Variation	dB	-	0.9	1.3
Absolute Delay	usec	-	3.17	4
Ultimate Rejection(f0±17MHz)	dB	50	51	-
Material Temperature coefficient	KHz/°C	-10.06		
Substrate Material	-	YZ LN		
Ambient Temperature	°C	25		
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-45	-	+105
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1		
Package Size	DIP3512 (35.0x12.8x4.7mm3)			

Notes:

- All specifications are based on the test circuit shown;
- In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
- Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
- This is the optimum impedance in order to achieve the performance show.




SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBN10704		
Rev. Date	2007-12-25		
Ver.	2.0	Page 1/3	



Matching Configuration

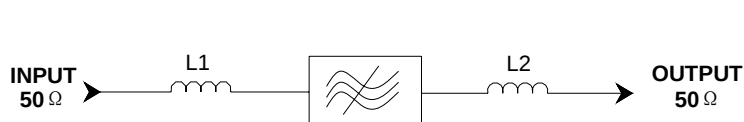


L1=56nH L2=82nH

Source/Load Impedance=50 ohm

Notes - Component values may change depending
on board layout.

Package Dimension

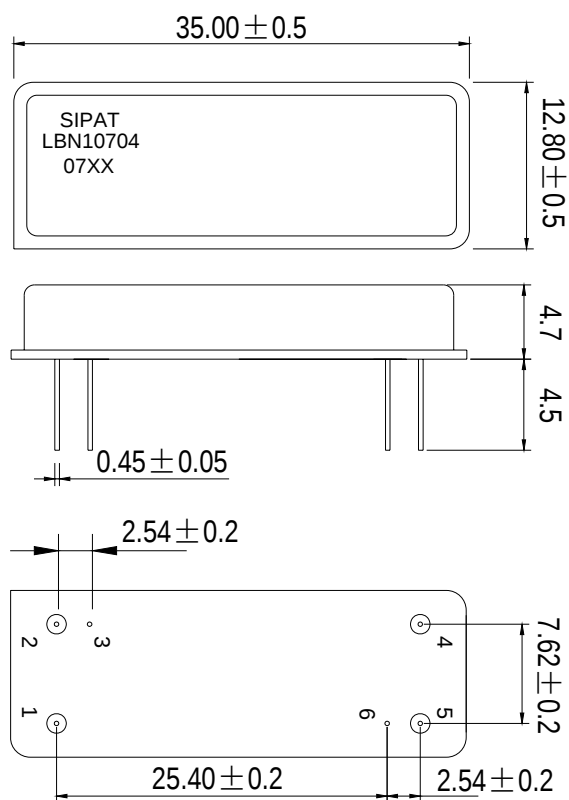

Pad Configuration:

Input 1
Output 5
Ground All Others

Marking Configuration:

- 1) SIPAT: Manufacturer Name
- 2) LBN10704: Part Number
- 3) 07XX: Date Code

Package: DIP3512

Unit: mm




SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBN10704	
Rev. Date	2007-12-25	
Ver.	2.0	Page 2/3



Typical Performance


Frequency Respond

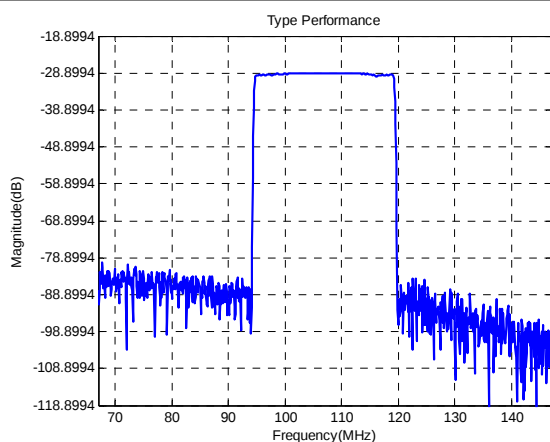

Horizontal: 10MHz/Div

Vertical: 10dB/Div


Passband Respond

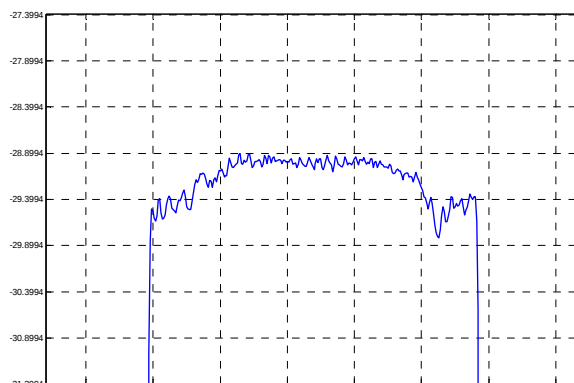

Horizontal: 5MHz/Div

Vertical: 0.5dB/Div


Group Delay Variation($f_0 \pm 12\text{MHz}$)

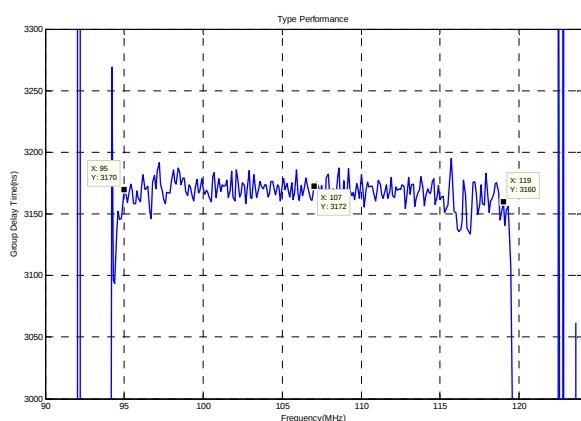

Horizontal: 5MHz/Div

Vertical: 50ns/Div


Phase Linearity($f_0 \pm 12\text{MHz}$)

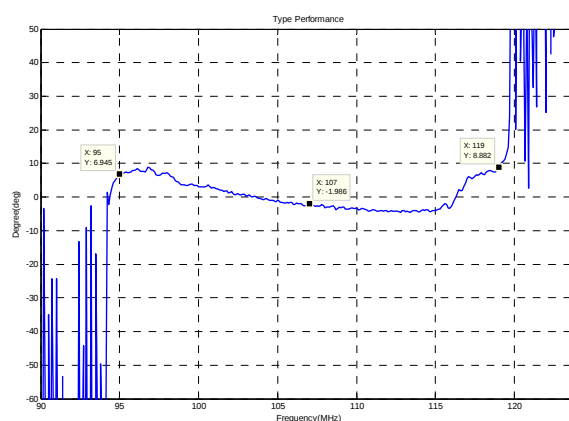


Horizontal: 5MHz/Div

Vertical: 10deg/Div

Smith Chart S11

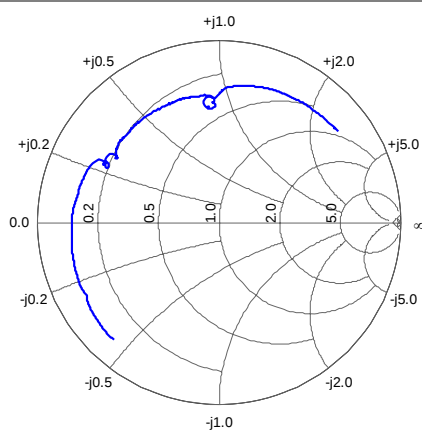

Smith Chart S22

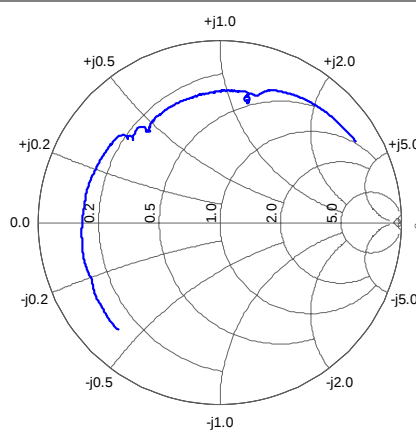

SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number

LBN10704

Rev. Date

2007-12-25

Ver.

2.0

Page 3/3