

$I_{F(AV)} = 30\text{Amp}$   
 $V_R = 35 - 45\text{V}$

**Major Ratings and Characteristics**

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform (Per Device)	30	A
$I_{FRM}$ @ $T_C = 130^\circ\text{C}$ (Per Leg)	30	A
$V_{RRM}$	35 - 45	V
$I_{FSM}$ @ $t_p = 5 \mu\text{s}$ sine	1060	A
$V_F$ @ 30Apk, $T_J = 125^\circ\text{C}$	0.73	V
$T_J$ range	-65 to 150	$^\circ\text{C}$


**Description/ Features**

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C  $T_J$  operation
- Center tap TO-220 and D<sup>2</sup>Pak packages
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)


**Case Styles**

**MBRB25..CTPbF**



**D<sup>2</sup>PAK**

**MBR25..CT-1PbF**



**TO-262**

Voltage Ratings

Parameters	MBRB2535CTPbF MBR2535CT-1PbF	MBRB2545CTPbF MBR2545CT-1PbF
V <sub>R</sub> Max. DC Reverse Voltage (V)	35	45
V <sub>RWM</sub> Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

Parameters	Values	Units	Conditions
I <sub>F(AV)</sub> Max. Average Forward Current (PerLeg) (PerDevice)	15 30	A	@ T <sub>C</sub> = 130° C, (Rated V <sub>R</sub> )
I <sub>FRM</sub> Peak Repetitive Forward Current (Per Leg)	30	A	Rated V <sub>R</sub> , square wave, 20kHz T <sub>C</sub> = 130° C
I <sub>FSM</sub> Non Repetitive Peak Surge Current	1060 150	A	5µs Sine or 3µs Rect. pulse Following any rated load condition and with rated V <sub>RWM</sub> applied Surge applied at rated load conditions halfwave, single phase, 60Hz
E <sub>AS</sub> Non-Repetitive Avalanche Energy (Per Leg)	16	mJ	(Per Leg) T <sub>J</sub> = 25 °C, I <sub>AS</sub> = 2Amps, L = 8mH
I <sub>AR</sub> Repetitive Avalanche Current (Per Leg)	2	A	Current decaying linearly to zero in 1 µsec Frequency limited by T <sub>J</sub> max. V <sub>A</sub> = 1.5 x V <sub>R</sub> typical

Electrical Specifications

Parameters	Values	Units	Conditions
V <sub>FM</sub> Max. Forward Voltage Drop (1)	0.82 0.73	V	@ 30A T <sub>J</sub> = 25 °C @ 30A T <sub>J</sub> = 125 °C
I <sub>RM</sub> Max. Instantaneous Reverse Current (1)	0.2 40	mA	T <sub>J</sub> = 25 °C T <sub>J</sub> = 125 °C Rated DC voltage
V <sub>F(TO)</sub> Threshold Voltage	0.355	V	T <sub>J</sub> = T <sub>J</sub> max.
r <sub>t</sub> Forward Slope Resistance	12.3	mΩ	
C <sub>T</sub> Max. Junction Capacitance	700	pF	V <sub>R</sub> = 5V <sub>DC</sub> (test signal range 100Khz to 1Mhz) 25°C
L <sub>S</sub> Typical Series Inductance	8.0	nH	Measured from top of terminal to mounting plane
dv/dt Max. Voltage Rate of Change	10000	V/ µs	(Rated V <sub>R</sub> )

(1) Pulse Width < 300µs, Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	Values	Units	Conditions
T <sub>J</sub> Max. Junction Temperature Range	-65 to 150	°C	
T <sub>stg</sub> Max. Storage Temperature Range	-65 to 175	°C	
R <sub>thJC</sub> Max. Thermal Resistance Junction to Case (Per Leg)	1.5	°C/W	DC operation
R <sub>thCS</sub> Typical Thermal Resistance Case to Heatsink	0.50	°C/W	Mounting surface, smooth and greased Only for TO-220
wt Approximate Weight	2(0.07)	g(oz.)	
T Mounting Torque	Min. 6(5) Max. 12(10)	Kg-cm (lbf-in)	Non-lubricated threads
Device Marking	MBRB25..CT MBR25..CT-1		Case style D <sup>2</sup> Pak Case style TO-262

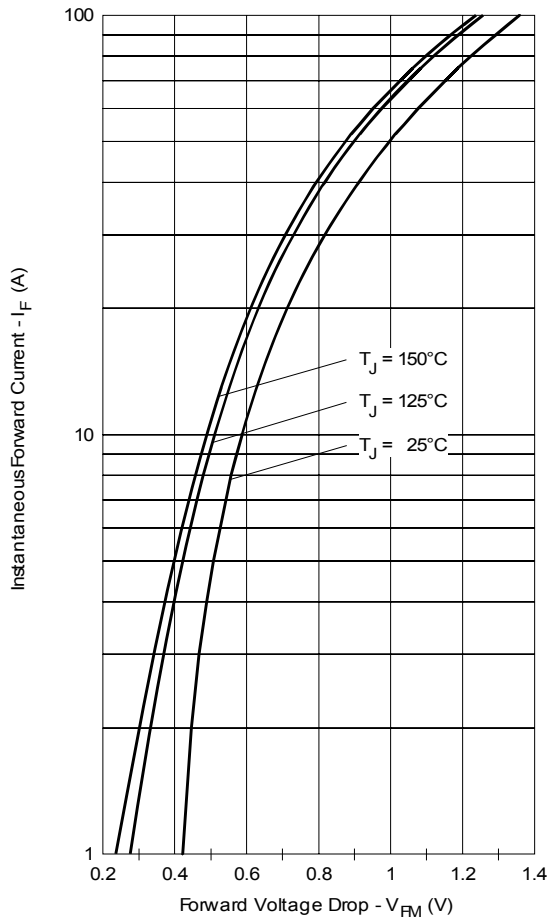


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

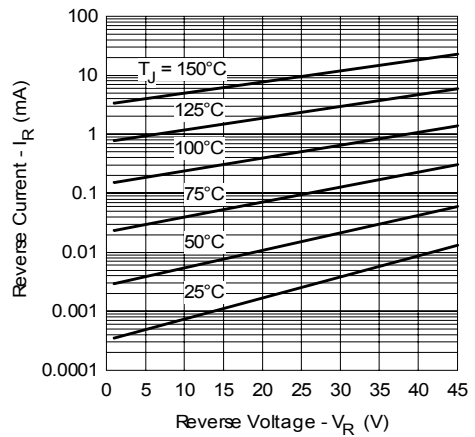


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

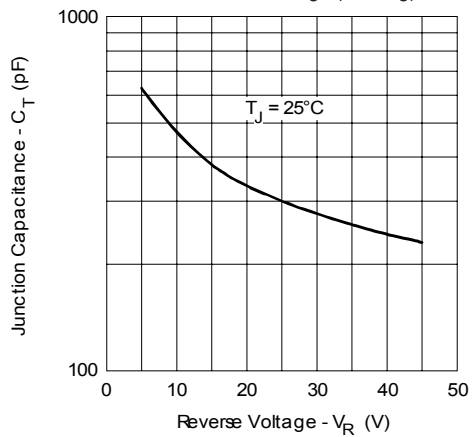


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

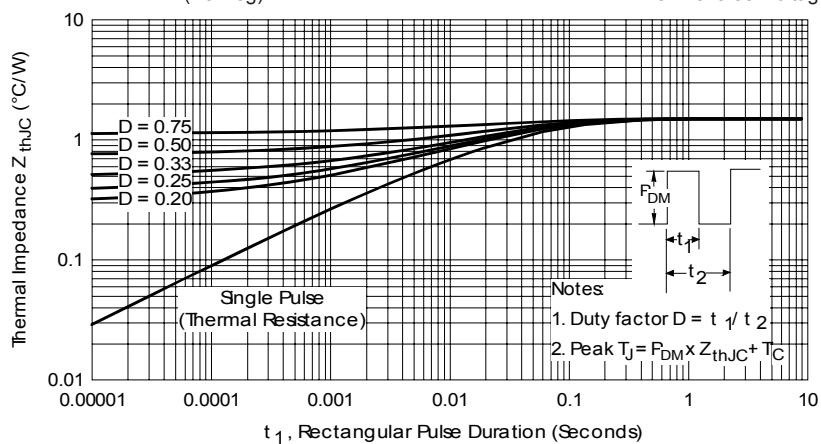


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

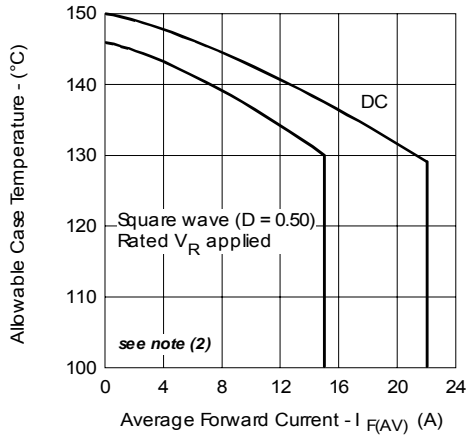


Fig. 5- Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

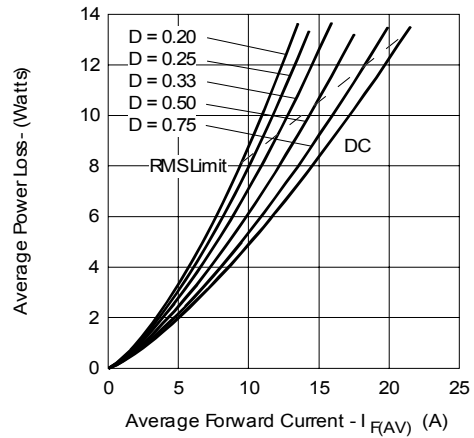


Fig. 6- Forward Power Loss Characteristics (Per Leg)



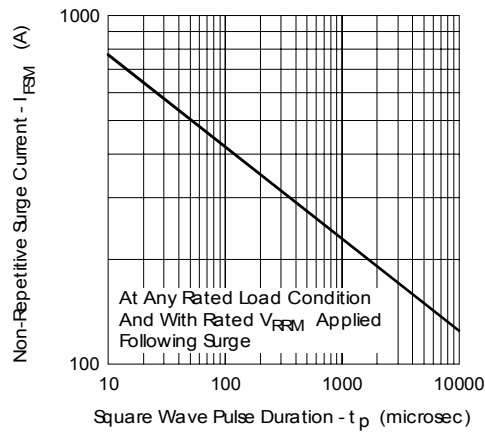


Fig. 7- Max. Non-Repetitive Surge Current (Per Leg)

- (2) Formula used:  $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$ ;  
 $Pd$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);  
 $Pd_{REV}$  = Inverse Power Loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1}$  = rated  $V_R$

Outlines Table

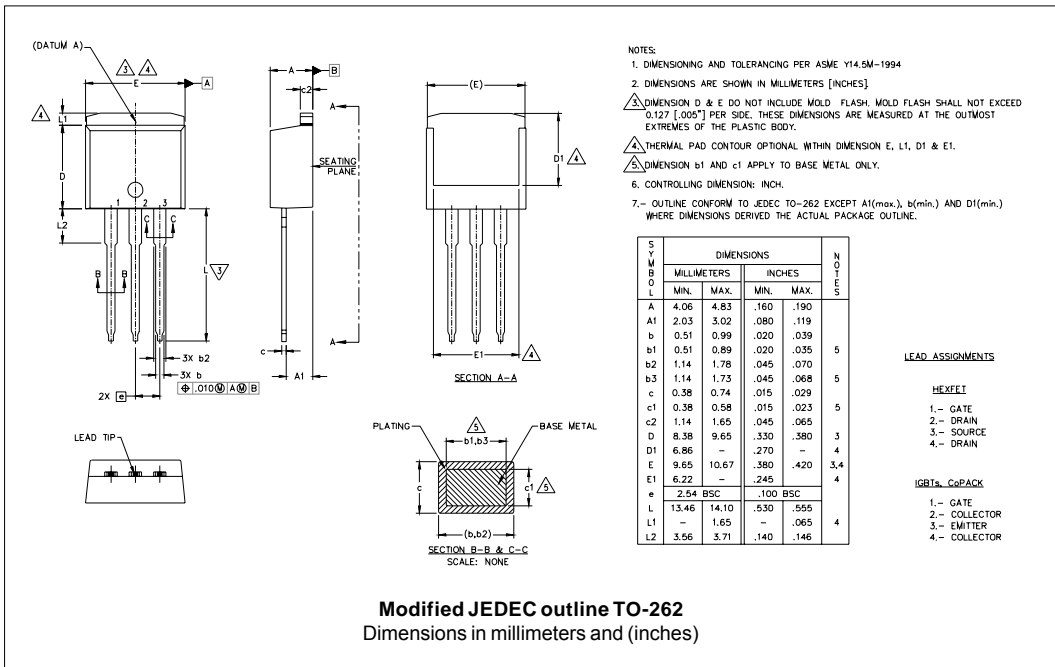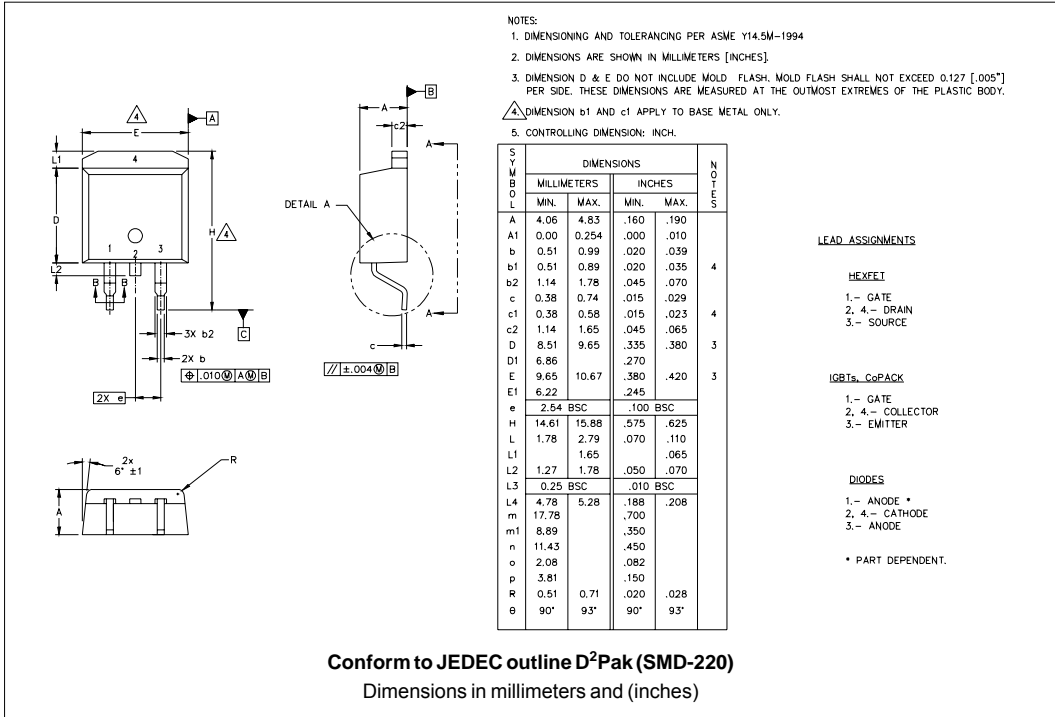

Part Marking Information

**D<sup>2</sup>PAK**

EXAMPLE: THIS IS A MBRB2545CT  
LOT CODE 8024  
ASSEMBLED ON WW 02, 2000

Note: "P" in assembly line position indicates "Lead-Free"

INTERNATIONAL RECTIFIER LOGO  
PART NUMBER  
DATE CODE  
YEAR 0 = 2000  
WEEK 02  
P = LEAD-FREE

**TO-262**

EXAMPLE: THIS IS A MBR2545CT-1  
LOT CODE 1789  
ASSEMBLED ON WW 19, 2002

Note: "P" in assembly line position indicates "Lead-Free"

INTERNATIONAL RECTIFIER LOGO  
PART NUMBER  
DATE CODE  
YEAR 2 = 2002  
WEEK 19  
P = LEAD-FREE

Tape & Reel Information

SECTION Y-Y

Ao	10.50 +/- 0.1
Bo	15.80 +/- 0.1
B2	10.25 +/- 0.1
Ko	4.90 +/- 0.1
F	11.50 +/- 0.1
P1	16.00 +/- 0.1
W	24.00 +/- 0.3

NOTES:

- 1.0 10 SPROCKET HOLE PITH CUMULATIVE TOLERANCE ±0.2
- 2.0 CAMBER NOT TO EXCEED 1mm in 100mm
- 3.0 MATERIAL: CONDUCTIVE BLACK STYRENIC ALLOY
- 4.0 K<sub>0</sub> MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER
- 5.0 MEASURED FROM CENTRELINE OF SPROCKET HOLE TO CENTRELINE OF POCKET
- 6.0 VENDOR: (OPTIONAL)
- 7.0 MUST ALSO MEET REQUIREMENTS OF EIA STANDAR #EIA-481A TAPING OF SURFACE MOUNT COMPONENTS FOR AUTOMATIC PLACEMENT
- 8.0 SURFACE RESISTIVITY OF MOLDED MATL. MUST MEASURE LESS OR EQUAL TO 10<sup>6</sup> OHMS PER SQUARE. MEASURED IN ACCORDANCE TO PROCEDURE GIVEN IN ASTM D-257 & ASTM D-991
- 9.0 TOTAL LENGTH PER REEL MUST BE 45 METERS
- 10.0 © CRITICAL

Dimensions in millimeters and (inches)

Ordering Information Table

Device Code																			
	<table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;">MBR</td> <td style="padding: 5px;">B</td> <td style="padding: 5px;">25</td> <td style="padding: 5px;">45</td> <td style="padding: 5px;">CT</td> <td style="padding: 5px;">-1</td> <td style="padding: 5px;">TRL</td> <td style="padding: 5px;">PbF</td> </tr> </table>	MBR	B	25	45	CT	-1	TRL	PbF										
MBR	B	25	45	CT	-1	TRL	PbF												
	<table style="margin: auto;"> <tr> <td style="text-align: center;">①</td> <td style="text-align: center;">②</td> <td style="text-align: center;">③</td> <td style="text-align: center;">④</td> <td style="text-align: center;">⑤</td> <td style="text-align: center;">⑥</td> <td style="text-align: center;">⑦</td> <td style="text-align: center;">⑧</td> </tr> </table>	①	②	③	④	⑤	⑥	⑦	⑧										
①	②	③	④	⑤	⑥	⑦	⑧												
<table style="width: 100%;"> <tr> <td style="width: 30px; text-align: center;"><b>1</b></td> <td>- Essential Part Number</td> </tr> <tr> <td style="text-align: center;"><b>2</b></td> <td>- B = Surface Mount None = TO-220</td> </tr> <tr> <td style="text-align: center;"><b>3</b></td> <td>- Current Rating (30A)</td> </tr> <tr> <td style="text-align: center;"><b>4</b></td> <td>- Voltage code: Code = <math>V_{RRM}</math></td> </tr> <tr> <td style="text-align: center;"><b>5</b></td> <td>- CT = Essential Part Number</td> </tr> <tr> <td style="text-align: center;"><b>6</b></td> <td>- "-1" = TO-262</td> </tr> <tr> <td style="text-align: center;"><b>7</b></td> <td>- <ul style="list-style-type: none"> <li>• none = Tube (50 pieces)</li> <li>• TRL = Tape &amp; Reel (Left Oriented - for D<sup>2</sup>Pak only)</li> <li>• TRR = Tape &amp; Reel (Right Oriented - for D<sup>2</sup>Pak only)</li> </ul> </td> </tr> <tr> <td style="text-align: center;"><b>8</b></td> <td>- <ul style="list-style-type: none"> <li>• none = Standard Production</li> <li>• PbF = Lead-Free</li> </ul> </td> </tr> </table>	<b>1</b>	- Essential Part Number	<b>2</b>	- B = Surface Mount None = TO-220	<b>3</b>	- Current Rating (30A)	<b>4</b>	- Voltage code: Code = $V_{RRM}$	<b>5</b>	- CT = Essential Part Number	<b>6</b>	- "-1" = TO-262	<b>7</b>	- <ul style="list-style-type: none"> <li>• none = Tube (50 pieces)</li> <li>• TRL = Tape &amp; Reel (Left Oriented - for D<sup>2</sup>Pak only)</li> <li>• TRR = Tape &amp; Reel (Right Oriented - for D<sup>2</sup>Pak only)</li> </ul>	<b>8</b>	- <ul style="list-style-type: none"> <li>• none = Standard Production</li> <li>• PbF = Lead-Free</li> </ul>	<table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;">35 = 35V</td> </tr> <tr> <td style="padding: 5px;">45 = 45V</td> </tr> </table>	35 = 35V	45 = 45V
<b>1</b>	- Essential Part Number																		
<b>2</b>	- B = Surface Mount None = TO-220																		
<b>3</b>	- Current Rating (30A)																		
<b>4</b>	- Voltage code: Code = $V_{RRM}$																		
<b>5</b>	- CT = Essential Part Number																		
<b>6</b>	- "-1" = TO-262																		
<b>7</b>	- <ul style="list-style-type: none"> <li>• none = Tube (50 pieces)</li> <li>• TRL = Tape &amp; Reel (Left Oriented - for D<sup>2</sup>Pak only)</li> <li>• TRR = Tape &amp; Reel (Right Oriented - for D<sup>2</sup>Pak only)</li> </ul>																		
<b>8</b>	- <ul style="list-style-type: none"> <li>• none = Standard Production</li> <li>• PbF = Lead-Free</li> </ul>																		
35 = 35V																			
45 = 45V																			

Data and specifications subject to change without notice.  
 This product has been designed and qualified for Industrial Level and Lead-Free.  
 Qualification Standards can be found on IR's Web site.