


Edal

SERIES BR656

SILICON HIGH VOLTAGE RECTIFIER

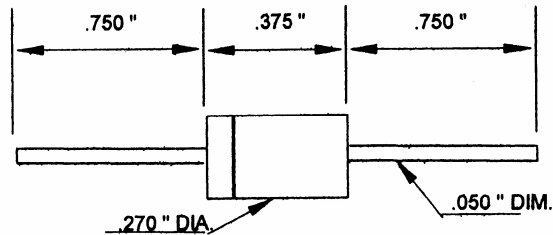

PART NUMBER	PIV VOLTS	$I_o$ AMPS @ 50° C	$V_f$ @ $I_o$ @ 25° C	$I_r$ @ PIV @ 25° C	MAX SINGLE CYCLE SURGE CURRENT	$T_{rr}$
BR656-15	1500	1.0	4.2	20 $\mu$ A	40 AMPS	300 nSEC
BR656-20	2000	1.0	4.2	20 $\mu$ A	40 AMPS	300 nSEC
BR656-30	3000	.75	5.6	20 $\mu$ A	40 AMPS	300 nSEC
BR656-40	4000	.60	7.0	20 $\mu$ A	40 AMPS	300 nSEC
BR656-50	5000	.50	8.4	20 $\mu$ A	40 AMPS	300 nSEC
BR656-60	6000	.42	9.8	20 $\mu$ A	40 AMPS	300 nSEC
BR656-70	7000	.375	11.2	20 $\mu$ A	40 AMPS	300 nSEC
BR656-80	8000	.33	12.6	20 $\mu$ A	40 AMPS	300 nSEC
BR656-90	9000	.30	14.0	20 $\mu$ A	40 AMPS	300 nSEC
BR656-100	10000	.27	15.4	20 $\mu$ A	40 AMPS	300 nSEC

$T_{rr}$  – MEASURED AT .5 AMP FORWARD, 1.0 AMP REVERSE, RECOVER TO .25 AMP  
 SUFFIX “A” REPRESENTS AVALANCHE CHARACTERISTICS  
 EX: BR656-100A

(203) 467-2591 TEL  
 (203) 469-5928 FAX  
 Email: Info@ edal.com  
 Internet: <http://www.edal.com>

***EDAL*** industries, inc.  
 51 Commerce St. East Haven, CT 06512