



### 1. CONFIGURATION & DIMENSIONS :

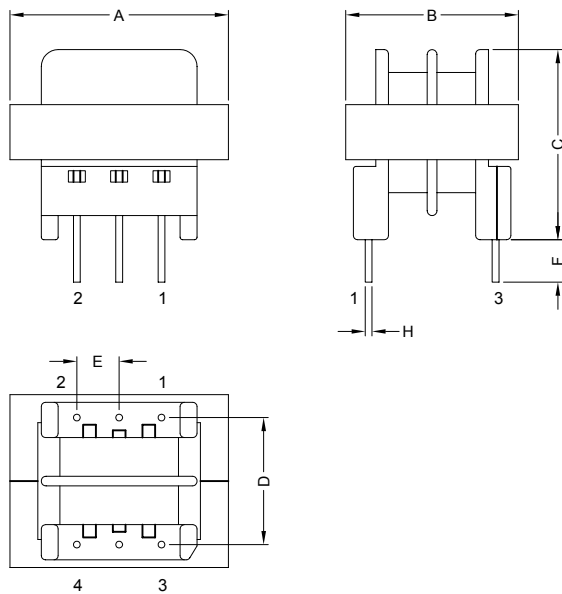

Unit:m/m

A	B	C	D	E	F	H
26.00 Max.	20.80 Max.	23.00 Max.	15.00±0.30	5.00±0.30	5.00±0.50	Ø0.80 Ref.

### 2. SCHEMATIC :

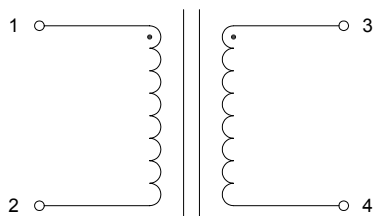

### 3. SCHEMATIC :

- a) Bobbin : PET
- b) Core : EE25
- c) Wire : Polyurethane DD (2UEW)
- d) Tape : Polyester Film
- e) Varnish : Synthite AC-43



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



**SUPERWORLD ELECTRONICS (S) PTE LTD**

#### 4. GENERAL SPECIFICATION :

- a) Operating Temperature Range : -25°C to +105°C
- b) Insulation Class : B (130°C)

#### 5. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance ( L )	Conditions	Test Frequency	DCR @ 25°C
SEEC5HTF-50730	L : (1-2) = 12mH±30%	-	1KHz 0.1V	(1-2) = 0.22Ω Max.
	L : (3-4) = 12mH±30%	-	1KHz 0.1V	(3-4) = 0.22Ω Max.



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



**SUPERWORLD ELECTRONICS (S) PTE LTD**