



1. Mechanical Dimensions:

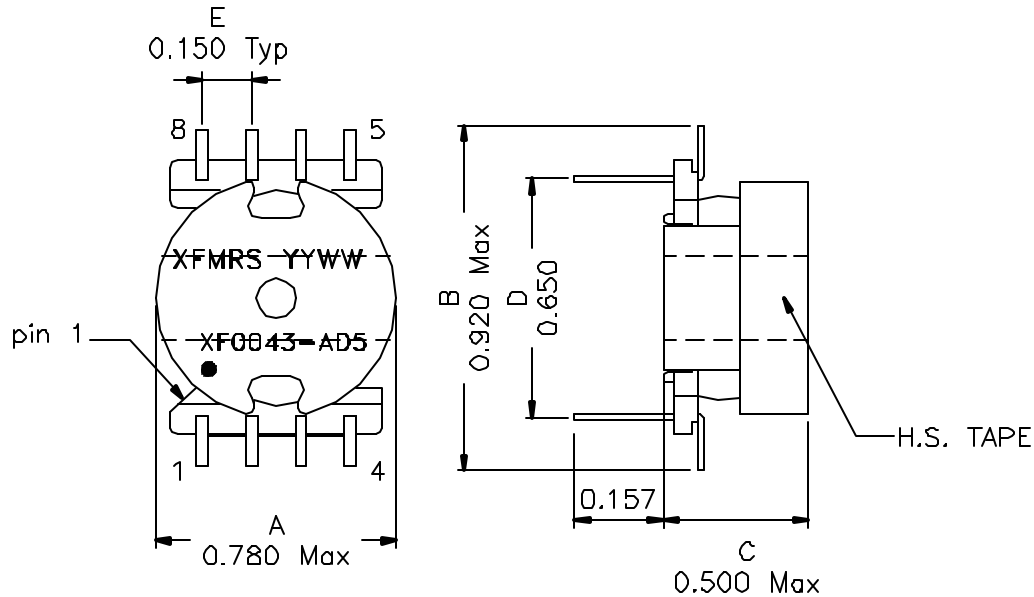

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability
2. Flammability: UL94V-0,
3. ASTM oxygen index. > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

2. Schematic:

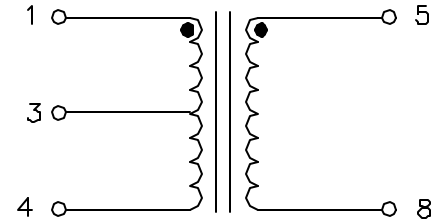

3. Electrical Specifications: @25°C

- OCL: 4.0mH±5% @1KHz 1V 0mA to 100mA (each winding)
- DCR: 3.00 Ohms Max (each winding)
- HIPOT: 1500VAC between windings

DOC. REV A/1

| | | | |
|--|------------------------------|-----|-----------|
| XFMR5 Inc. | Title: COMMON MODE CHOKES | | |
| | P/N: XF0043-AD5 | | REV. A |
| UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH | DWN. | 李小锋 | Jun-14-01 |
| | CHK. | 廖玉坤 | Jun-14-01 |
| | APP. | BW | Jun-14-01 |