


- FEATURES: ■ HIGH VOLTAGE CAPABILITY      ■ HIGH SPEED SWITCHING      ■ WIDE SOA
- APPLICATION: ■ FLUORESCENT LAMP      ■ ADAPTER CHARGER







● Absolute Maximum Ratings (TC=25°C)                          TO-92

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V <sub>CBO</sub>	600	V
Collector-Emitter Voltage	V <sub>CEO</sub>	400	V
Emitter- Base Voltage	V <sub>EBO</sub>	9	V
Collector Current	I <sub>C</sub>	1.0	A
Total Power Dissipation	P <sub>C</sub>	11	W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>tsg</sub>	-65-150	°C

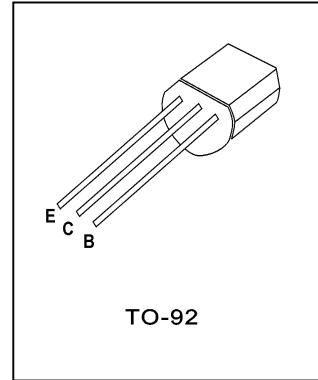

● Electronic Characteristics ( Tc=25°C )

CHARACTERISTICS	SYMBOL	TEST CONDITION	MIN	MAX	UNIT
Collector-Base Cutoff Current	I <sub>CBO</sub>	V <sub>CB</sub> =600V		100	µ A
Collector-Emitter Cutoff Current	I <sub>CEO</sub>	V <sub>CE</sub> =400V, I <sub>B</sub> =0		250	µ A
Collector-Emitter Voltage	V <sub>CEO</sub>	I <sub>C</sub> =10mA, I <sub>B</sub> =0	400		V
Emitter- Base Voltage	V <sub>EBO</sub>	I <sub>E</sub> =1mA, I <sub>C</sub> =0	9		V
Collector-Emitter Saturation Voltage	V <sub>CES</sub>	I <sub>C</sub> =0.2A, , I <sub>B</sub> =0.04A		0.5	V
		I <sub>C</sub> =0.5A, I <sub>B</sub> =0.1A		1.0	
		I <sub>C</sub> =0.8A, I <sub>B</sub> =0.2A		3.0	
Base-Emitter Saturation Voltage	V <sub>BES</sub>	I <sub>C</sub> =0.2A, I <sub>B</sub> =0.04A		1.2	V
DC Current Gain	h <sub>FE</sub>	V <sub>CE</sub> =5V, I <sub>C</sub> =5mA	8		
		V <sub>CE</sub> =5V, I <sub>C</sub> =0.2A	10	40	
		V <sub>CE</sub> =5V, I <sub>C</sub> =0.8A	8		
Storage Time	t <sub>S</sub>	V <sub>CC</sub> =250V, I <sub>C</sub> =5I <sub>B</sub> I <sub>B1</sub> = -I <sub>B2</sub> =0.1A		2.5	µS
Falling Time	t <sub>f</sub>			0.8	

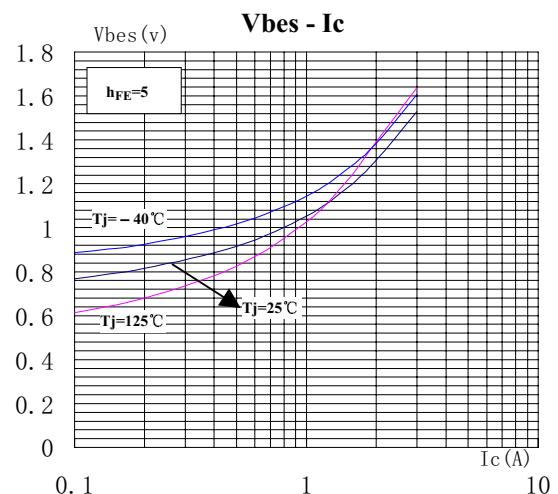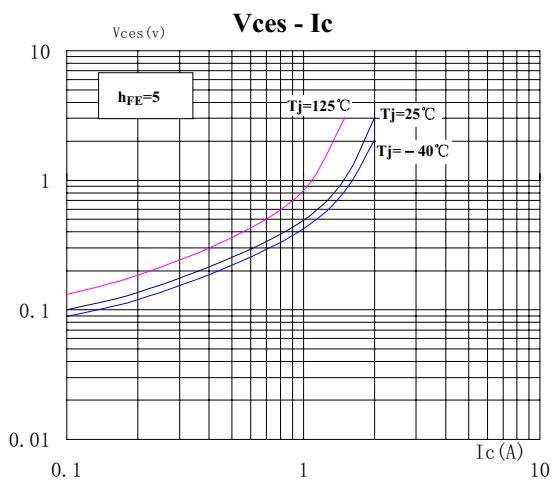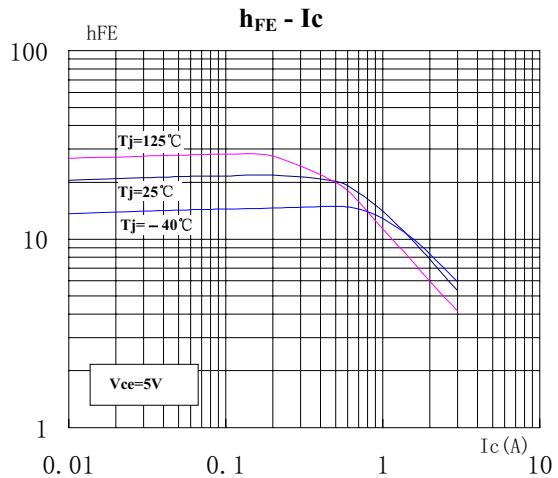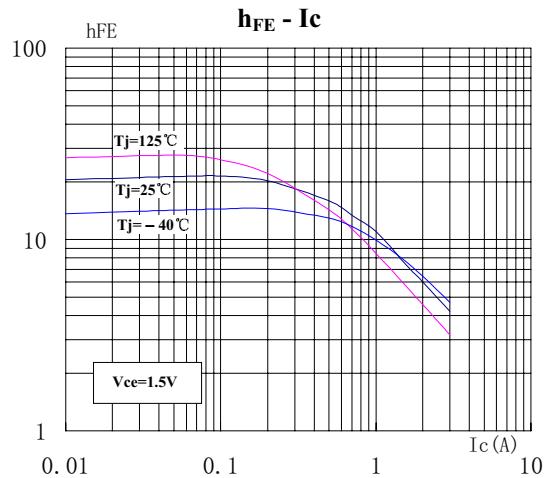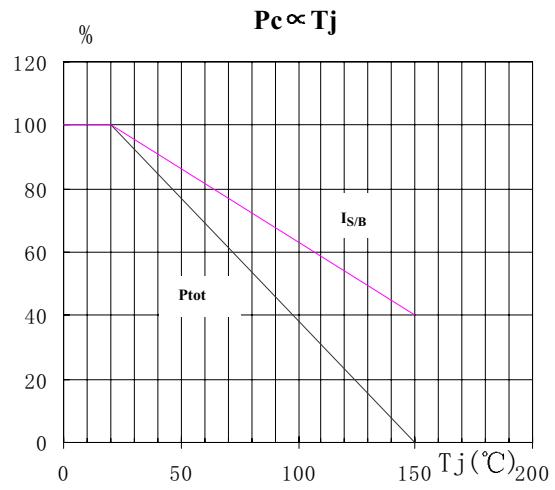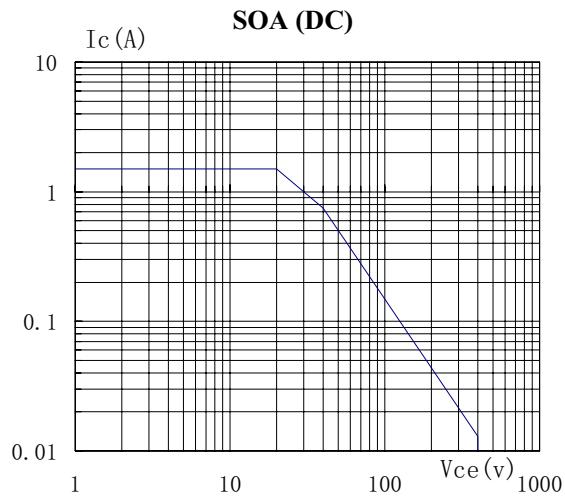

## TO-92 MECHANICAL DATA

UNIT: mm

SYMBOL	min	nom	max
A	4.3		5.3
b	0.3		
c	0.3		
$\phi D$	4.3		
D			5.2
d	1.0		1.7
E	3.2		4.2
e		2.54	
e1		1.27	
L	12.7		
L1			2.0

