


1. Mechanical Dimensions:

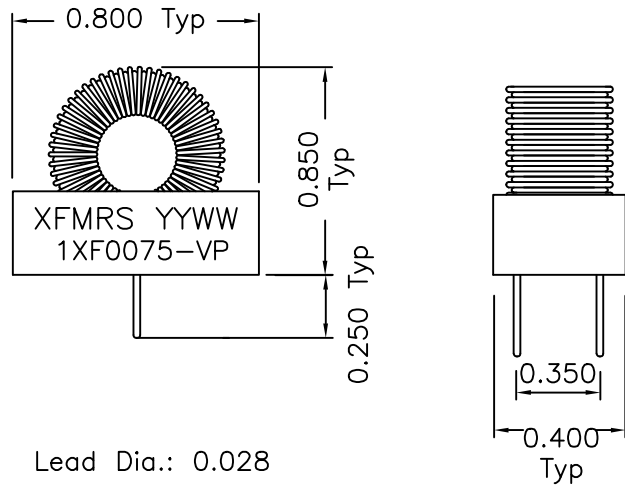


Lead Dia.: 0.028

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -40°C to +85°C
6. NO VARNISH REQUIRED

2. Schematic:



3. Electrical Specifications:

Inductance: 61uH±20% @10KHz, 100mV

OCL: 40uHTyp @10KHz, 0.1V 3Adc

DC Res.: 0.050 Ohms Maximum

DOC. REV. A/4

XFMRS Inc.	Title: VERTICAL INDUCTOR		
	UNLESS OTHERWISE SPECIFIED		P/N: 1XF0075-VP
	TOLERANCES: .xxx ±0.010		REV. A
	Dimensions in Inch		
	DWN.	廖玉坤	Mar-04-01
	CHK.	李清儿	Mar-04-01
	APP.	Joe Huff	Mar-04-01