
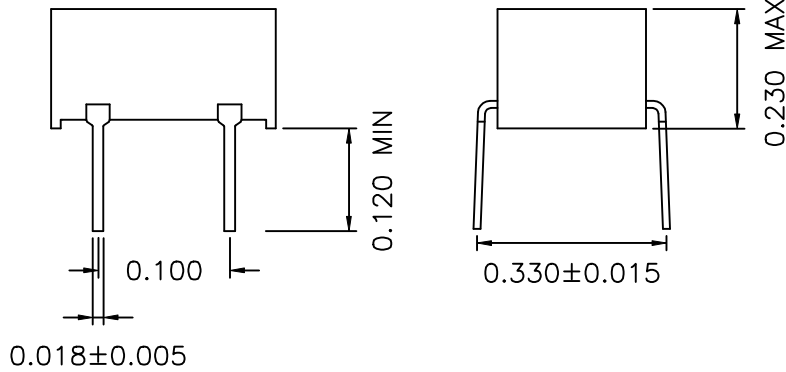



1. Dimensions:

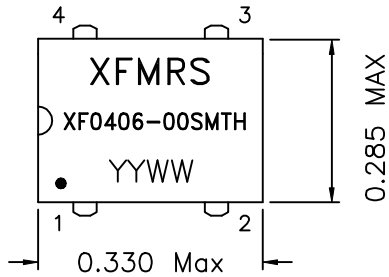

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

2. Schematic:



3. Electrical Specifications: @25°C

- Isolation: 125 Vrms [between terminals for 5s]
 Turns Ratio: (1-4):(2-3)=1:1
 DC Resistance: 0.06 Ohms Maximum (each winding)
 Impedance: 200 Ohms Min@20M-300MHz

DOC. REV: A/1

XFMRS Inc	Title: TRANSFORMER		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH		P/N: XF0406-00SMTH
DWN.	李小锋	Jul-27-01	
CHK.	廖玉坤	Jul-27-01	
APP.	Isaiah M	Jul-27-01	