

# SB26S

**SURFACE MOUNT SCHOTTKY  
BARRIER RECTIFIER**  
**VOLTAGE: 60V**      **CURRENT: 2.0A**




## FEATURE

Plastic package has Underwriters Laboratory Flammability Classification 94V-0  
For surface mounted applications  
Low profile package  
Built-in strain relief  
Low power loss, high efficiency  
High current capability, low forward voltage drop  
High surge capability  
For use in low voltage high frequency inverters, free wheeling, and polarity protection applications  
Guarding for over voltage protection  
High temperature soldering guaranteed:  
250°C /10 seconds at terminals

## MECHANICAL DATA

Case: JEDEC DO-214AA molded plastic body  
Terminals: Solder plated, solderable per MIL-STD-750, Method 2026  
Polarity: Color band denotes cathode end  
Weight: 0.003 ounce, 0.093 gram

## SMB/DO--214AA

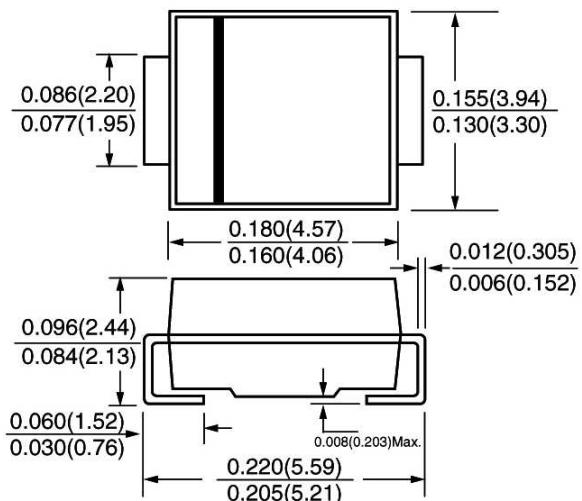

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated, for capacitive load, derate current by 20%)


	SYMBOL	SB26S	units
Maximum Recurrent Peak Reverse Voltage	Vrrm	60	V
Maximum RMS Voltage	Vrms	42	V
Maximum DC blocking Voltage	Vdc	60	V
Maximum Average Forward Rectified Current 3/8"lead length at T <sub>L</sub> =120°C	If(av)	2.0	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	Ifsm	50.0	A
Maximum Forward Voltage at rated Forward current (Note 1)	Vf	0.5	V
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =100°C	Ir	0.5 10.0	mA
Typical Thermal Resistance (Note 2)	R(ja)	75.0	°C/W
Operating junction temperature range	TJ	-55 to +150	°C
Storage Temperature range	Tstg	-55 to +150	°C

### Note:


1. Pulse test: 300μs pulse width, 1% duty cycle
2. P.C.B. mounted with 0.2 x 0.2inches(5.0 x 5.0mm) copper pad areas

## RATINGS AND CHARACTERISTIC CURVES SB26S


**Fig. 1 - Forward Current Derating Curve**

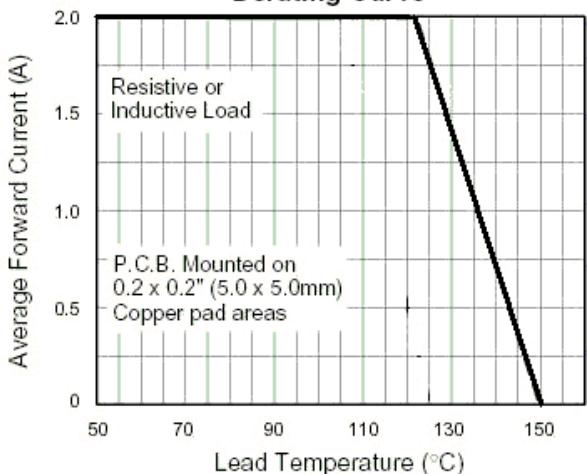


**Fig. 2 - Maximum Non-repetitive Surge Current**

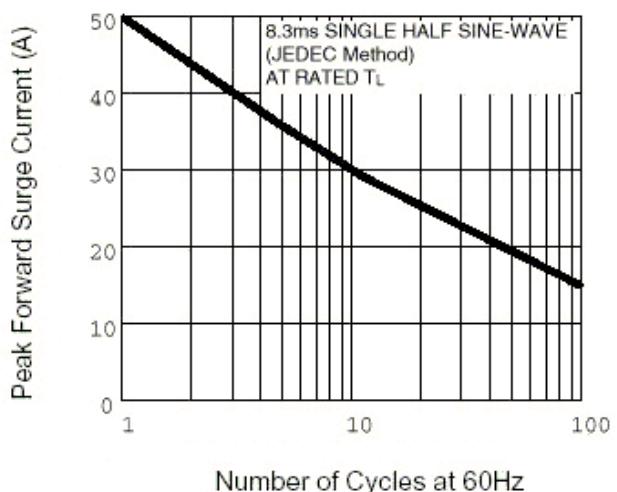

**Fig. 3 - Typical Instantaneous Forward Characteristics**

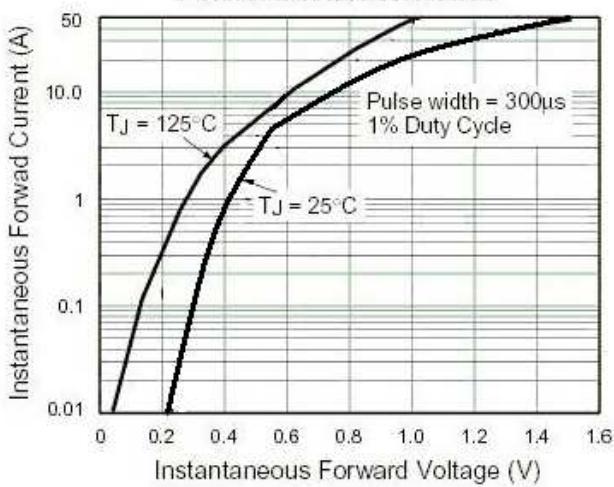

**Fig. 4 - Typical Reverse Current Characteristics**

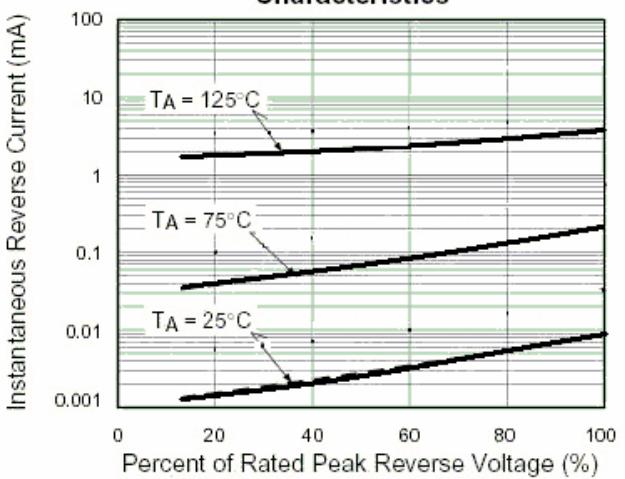

**Fig. 5 - Typical Junction Capacitance**

