

### Approvals

CE, NATO codification

### Life expectancy



L-10 LIFE AT 40°C:  
25 000 hours

### AC Motor

Housing material: aluminium  
Impeller material: plastic  
Weight: 6,95 kg  
Bearing system: ball bearings

### Available with:

- Safety switch
- Terminal block
- Aluminium impeller (62GR model)

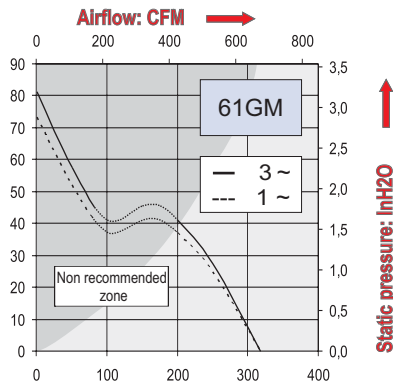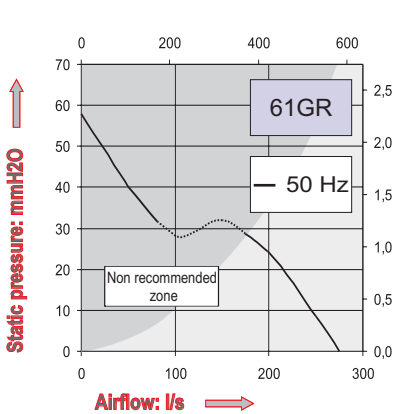

Part Number	Nominal voltage	Airflow	Noise level	Nominal speed	Frequency	Phases	Capacitor (not included)	Input power	Nominal Current	Starting Current	Connection type		Operating temperature	
	V	l/s	dB(A)	RPM	Hz		µF	W	mA	mA	Leads	Terminals	Min.°C	Max.°C
61GR116DC13	220	275	72	2750	50	3		100	400	1750	X		-10	70
	380	275	72	2750	50	3		100	230	1000	X		-10	70
	220	275	72	2750	50	1	6,9	105	480	1500	X		-10	70
	380	275	72	2750	50	1	2,2	105	280	900	X		-10	70
61GM116DC13	220	318	74	3300	60	3		160	690	2600	X		-10	70
	380	318	74	3300	60	3		160	400	1500	X		-10	70
	220	318	74	3300	60	1	10	166	780	2100	X		-10	70
	380	318	74	3300	60	1	3,2	166	450	1200	X		-10	70

### Additional versions:

Salt spray protected - Shock and vibration protected - Marine specifications  
Wide temperature range - Other voltages (consult factory)

### Accessories:

Refer to Accessories leaflet