

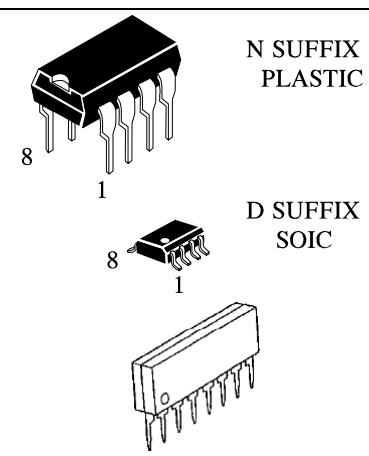
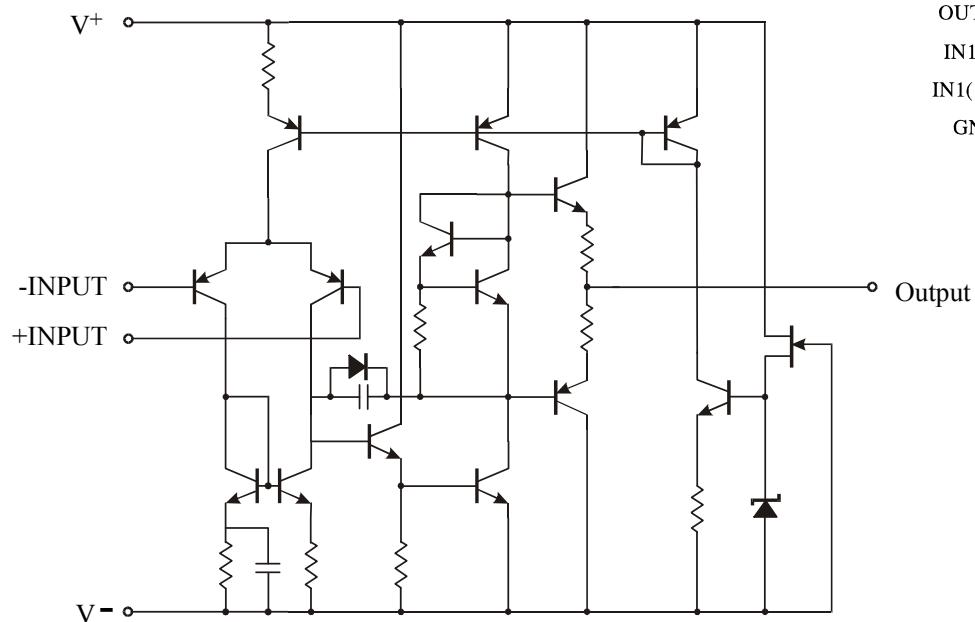


**DUAL OPERATIONAL AMPLIFIER****IL4560****GENERAL DESCRIPTION**


The IL4560 integrated circuit is a high-gain, wide bandwidth, dual operational amplifier capable of driving 20 V peak-to-peak into  $400\ \Omega$  loads. The IL4560 combines many of the features of the IL4558 as well as providing the capability of wider bandwidth, and higher slew rate make the IL4560 ideal for active filters, data and telecommunications, and many instrumentation applications.

**FEATURES**

- Operating Voltage  $(\pm 4\text{ V} \sim \pm 18\text{ V})$
- Wide Gain Bandwidth Product (10 MHz typ.)
- Slew Rate  $(4\text{ V}/\mu\text{s}\text{ typ.})$
- Bipolar Technology

**BLOCK DIAGRAM****EQUIVALENT CIRCUIT (1/2 Show)****ORDERING INFORMATION**

IL4560N Plastic  
IL4560D SOIC  
IL4560S SIP-8  
 $T_A = -25^\circ \text{ to } 75^\circ \text{ C}$   
for all packages.

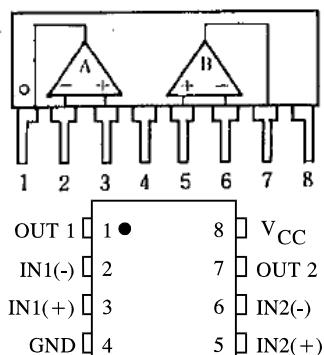**PIN ASSIGNMENT**

**ABSOLUTE MAXIMUM RATINGS** (Ta=25°C)

<b>Symbol</b>	<b>Parameter</b>	<b>Ratings</b>	<b>Unit</b>
V <sup>+</sup> /V <sup>-</sup>	Supply Voltage	±18	V
V <sub>ID</sub>	Differential Input Voltage	30	V
V <sub>IC</sub>	Input Voltage	±15*	V
Topr	Operation Temperature Range	-25 ~ +75	°C
Tstg	Storage Temperature Range	-60 ~ +125	°C
P <sub>D</sub>	Power Dissipation DIP-8 SOP-8 SIP-8	500 300 800	mW

\* For supply voltage less than ±15 V, the absolute maximum input voltage is equal to the supply voltage.


**ELECTRICAL CHARACTERISTICS**

<b>Symbol</b>	<b>Parameter</b>	<b>Test Condition</b>	<b>Min</b>	<b>Max</b>	<b>Unit</b>
V <sub>IO</sub>	Input Offset Voltage	R <sub>S</sub> ≤ 10 kΩ	-	6	mV
I <sub>IO</sub>	Input Offset Current		-	200	nA
I <sub>B</sub>	Input Bias Current		-	500	nA
R <sub>IN</sub>	Input Resistance		0.3	-	MΩ
A <sub>V</sub>	Large Signal Voltage Gain	R <sub>L</sub> ≥ 2 kΩ, V <sub>O</sub> = ±10 V	86	-	dB
V <sub>OM1</sub>	Maximum Output Voltage Swing 1	R <sub>L</sub> ≥ 2 kΩ	±12	-	V
V <sub>OM2</sub>	Maximum Output Voltage Swing 2	I <sub>O</sub> = 25 mA	±10	-	V
V <sub>ICM</sub>	Input Common Mode Voltage Range		±12	-	V
CMR	Common Mode Rejection Ratio	R <sub>S</sub> ≤ 10 kΩ	70	-	dB
SVR	Supply Voltage Rejection Ratio	R <sub>S</sub> ≤ 10 kΩ	76.5	-	dB
I <sub>CC</sub>	Operating Current		-	5.7	mA
SR	Slew Rate	R <sub>L</sub> ≥ 2 kΩ	3	5	V/μs

## ■ TYPICAL CHARACTERISTICS


### Open Loop Voltage Gain vs. Frequency

( $V^+/V^- = \pm 15V$ ,  $R_L = 2k\Omega$ ,  $T_a = 25^\circ C$ )

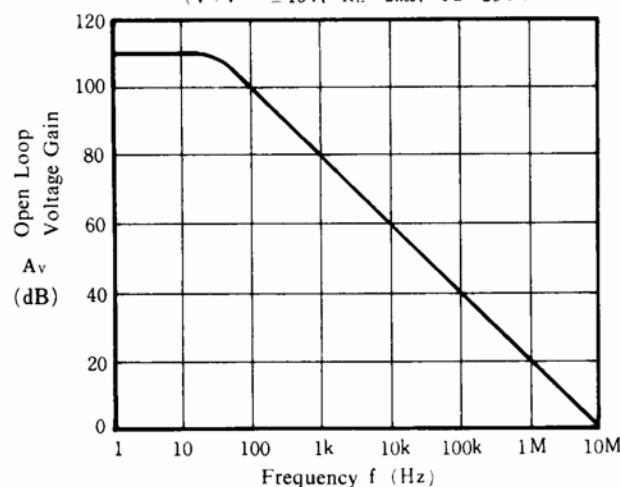


### Maximum Output Voltage Swing vs. Frequency

( $V^+/V^- = \pm 15V$ ,  $T_a = 25^\circ C$ )

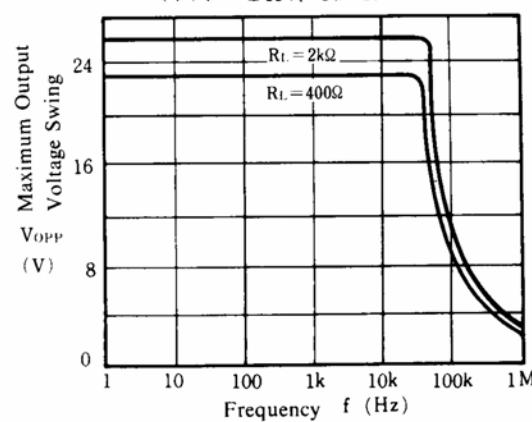


### Maximum Output Voltage Swing vs. Load Resistance

( $V^+/V^- = \pm 15V$ ,  $T_a = 25^\circ C$ )

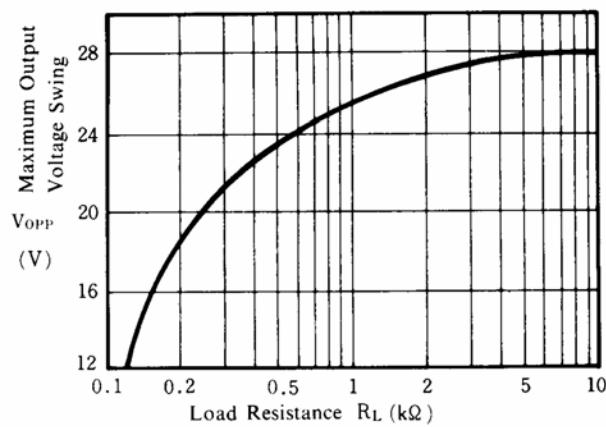


### Equivalent Input Noise Voltage vs. Frequency

( $V^+/V^- = \pm 15V$ ,  $R_S = 50\Omega$ ,  $A_v = 60dB$ ,  $T_a = 25^\circ C$ )

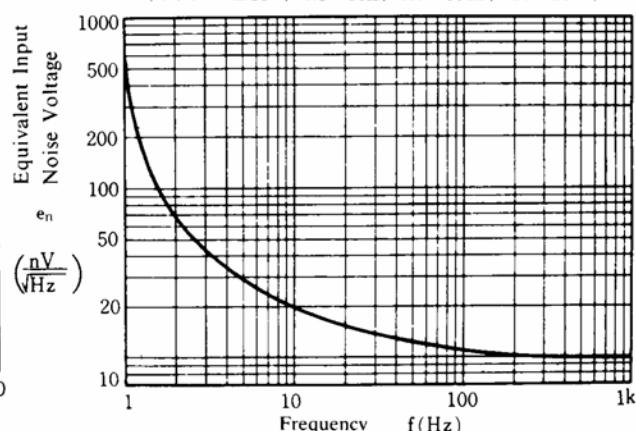


### Operating Current vs. Temperature

( $V^+/V^- = \pm 15V$ )

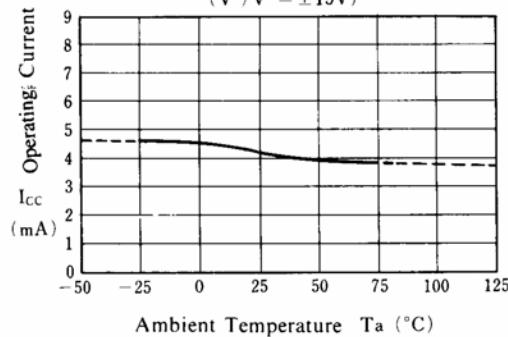


### Maximum Output Voltage Swing vs. Temperature

( $V^+/V^- = \pm 15V$ ,  $R_L = 2k\Omega$ )

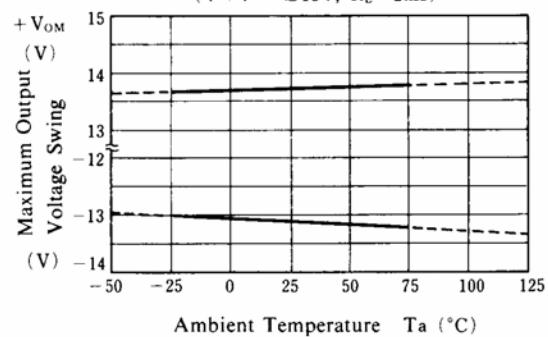


## ■ TYPICAL CHARACTERISTICS


**Input Offset Voltage vs. Temperature**

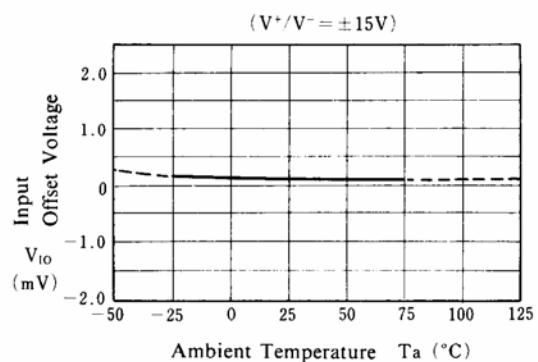


**Input Bias Current vs. Temperature**


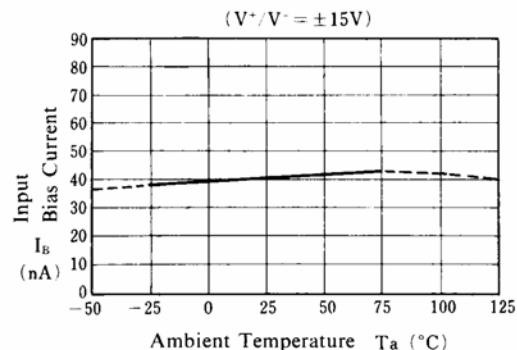


**Maximum Output Voltage Swing  
vs. Supply Voltage**

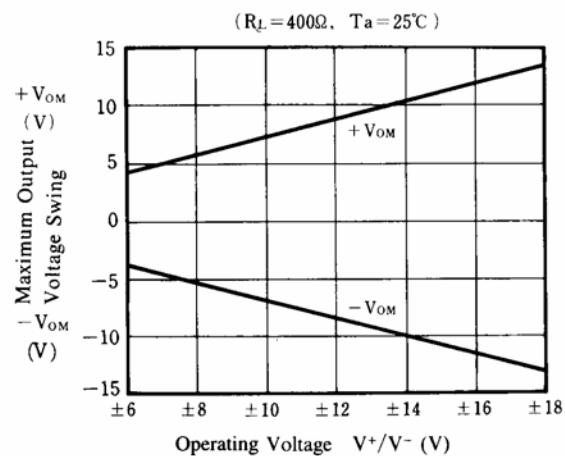


**Operating Current vs. Operating Voltage**


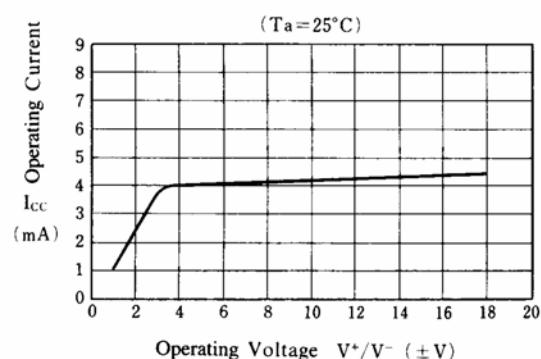


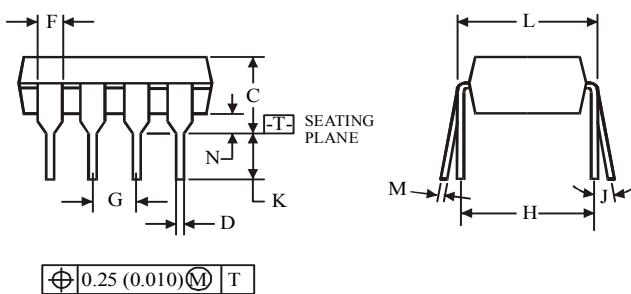**N SUFFIX PLASTIC DIP  
(MS - 001BA)**
**NOTES:**

- Dimensions "A", "B" do not include mold flash or protrusions.  
Maximum mold flash or protrusions 0.25 mm (0.010) per side.



	Dimension, mm	
Symbol	MIN	MAX
<b>A</b>	8.51	10.16
<b>B</b>	6.1	7.11
<b>C</b>		5.33
<b>D</b>	0.36	0.56
<b>F</b>	1.14	1.78
<b>G</b>		2.54
<b>H</b>		7.62
<b>J</b>	0°	10°
<b>K</b>	2.92	3.81
<b>L</b>	7.62	8.26
<b>M</b>	0.2	0.36
<b>N</b>	0.38	

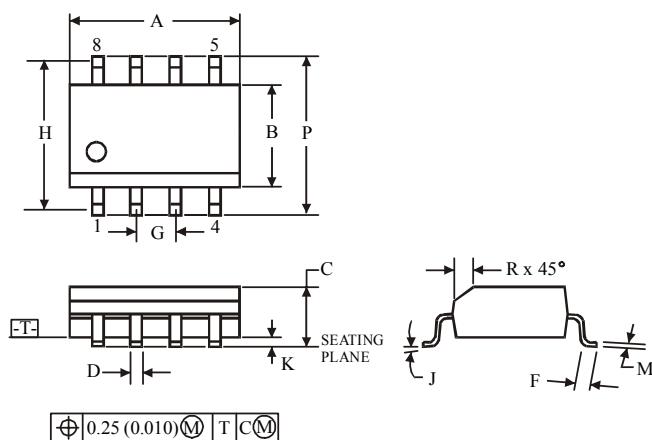
**D SUFFIX SOIC  
(MS - 012AA)**


	Dimension, mm	
Symbol	MIN	MAX
<b>A</b>	4.8	5
<b>B</b>	3.8	4
<b>C</b>	1.35	1.75
<b>D</b>	0.33	0.51
<b>F</b>	0.4	1.27
<b>G</b>		1.27
<b>H</b>		5.72
<b>J</b>	0°	8°
<b>K</b>	0.1	0.25
<b>M</b>	0.19	0.25
<b>P</b>	5.8	6.2
<b>R</b>	0.25	0.5

**NOTES:**

- Dimensions A and B do not include mold flash or protrusion.
- Maximum mold flash or protrusion 0.15 mm (0.006) per side for A; for B - 0.25 mm (0.010) per side.

## 8-Pin Plastic Single-in-Line (SIP)

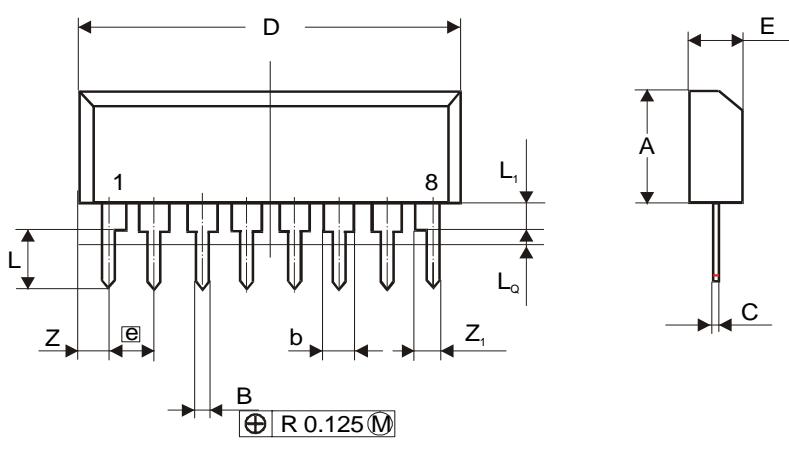

Dimension	mm	
	min	max
A	6.24	6.60
B	0.40	0.54
b	1.15	1.40
C	0.23	0.35
D	19.68	20.20
E	2.675	2.925
e	2.54	
L	2.95	3.25
L <sub>1</sub>	1.61	1.97
L <sub>Q</sub>		0.70
Z		1.21
Z <sub>1</sub>		1.40