

EPA3386S & EPA3386S-RC




- Robust design allows for toughest soldering processes
- Add “-RC” after part number for RoHS Compliant
- Small outline package on 0.050” pitch
- 1500 Vrms Isolation


Electrical Parameters @ 25° C

Primary Inductance (μH Min.)	Interwinding Capacitance (pF Max.)	Leakage Inductance (μH Min.)	DCR (Max.)	
			Pri.	Sec.
@ 100 KHz, 0.1Vrms	@ 100 KHz, 0.1Vrms	@ 100 KHz, 0.1Vrms		
1.2	30	0.6	0.7	1.2

Package

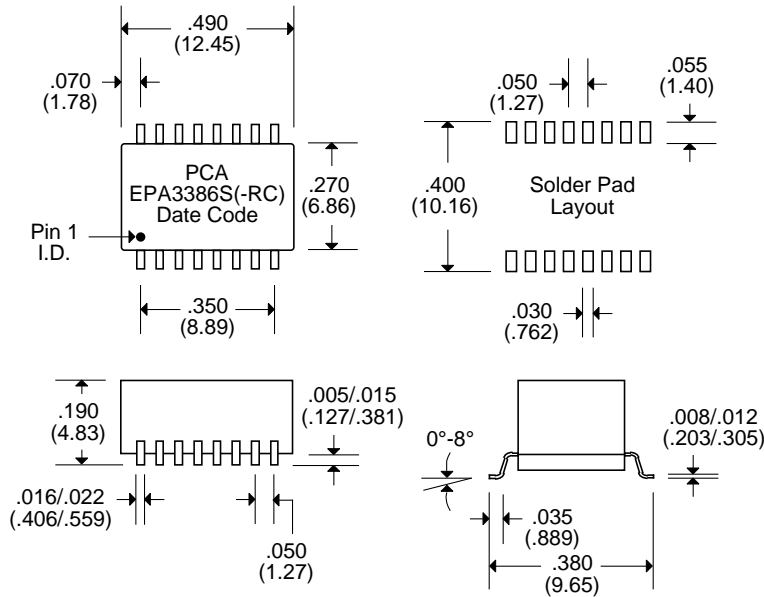

Schematic

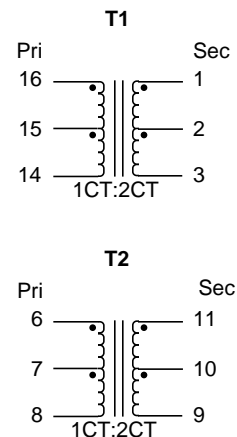

Notes :	EPA3386S	EPA3386S-RC
1. Lead Finish	SnPb	Matte Tin
2. Peak Temperature Rating	225°C	260°C
3. Moisture Sensitive Levels	MSL = 3 (168 Hours, 30°C/60%RH)	MSL = 4 (72 Hours, 30°C/60%RH)
4. Weight	TBD grams	TBD grams
5. Packaging Information (*Add "TR" to end of part number when placing order)	(Tube)	TBD pieces/tube
	(Tape & Reel)	TBD pieces/13" reel (*EPA3386S-TR)
		TBD pieces/13" reel (*EPA3386S-RCTR)

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$