

## HC-B 10-TFQ/PG16S

Order No.: 1771244

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771244>

Sleeve housing, for double locking latch, height 52 mm, with screw connection, 1x Pg16, lateral cable entry

### Commercial data

EAN	4017918035983
Pack	10 pcs.
Customs tariff	85389099
Weight/Piece	0.15576 KG
Catalog page information	Page 484 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
01/31/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Design	B10
Height	52 mm
Width	43 mm

Length	73 mm
Housing type	Sleeve housings
Locking type	For double locking latch
Type of the screw connection	1x Pg16
Pg screw connection	With
Wrench size, union nut	22 mm
Cable exit	Lateral
External cable diameter	7.5 mm ... 15 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Cable gland material	Nickel-plated brass
Cable seal material	NBR

#### Certificates / Approvals




Certification

GOST

#### Diagrams/Drawings

Dimensioned drawing

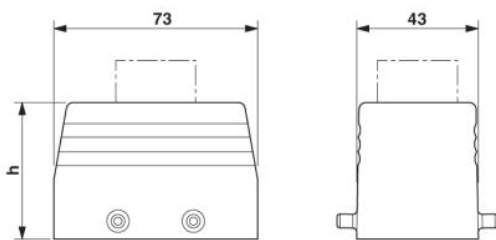

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;