



LIGITEK

LIGITEK ELECTRONICS CO.,LTD.
Property of Ligitek Only

DUAL DIGIT LED DISPLAY (0.56 Inch)

LDD535/65-XX/NDP

DATA SHEET

DOC. NO : QW0905-LDD535/65-XX/NDP

REV. : A

DATE : 09 - Dec - 2004




LIGITEK

LIGITEK ELECTRONICS CO.,LTD.
Property of Ligitek Only

PART NO. LDD535/65-XX/NDP

Page 1/7

Package Dimensions

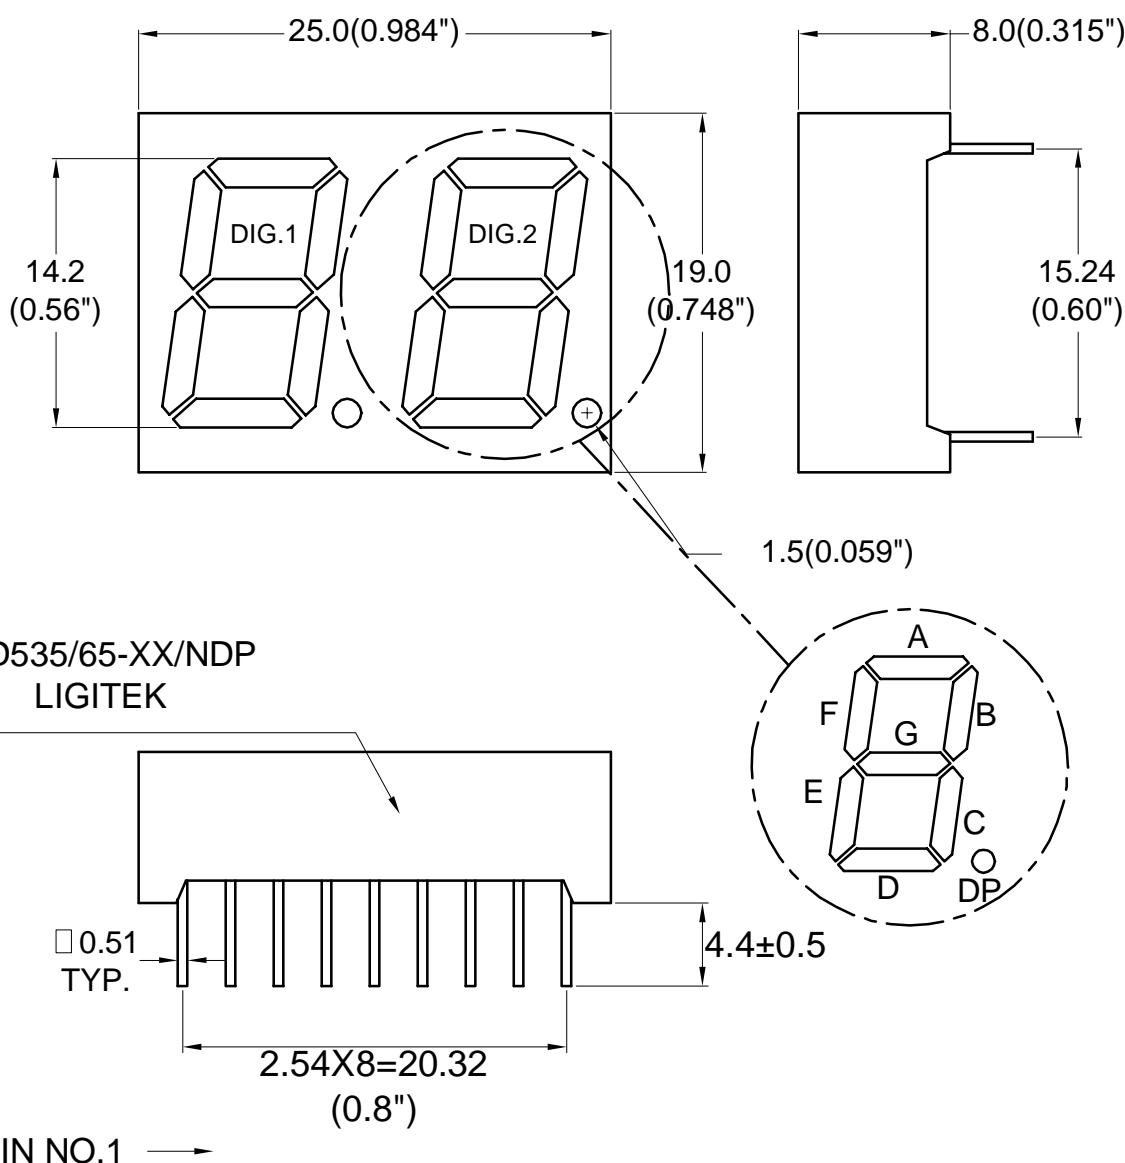

Note : 1.All dimension are in millimeters and (Inch) tolerance is $\pm 0.25\text{mm}$ unless otherwise noted.
2.Specifications are subject to change without notice.



LIGITEK

LIGITEK ELECTRONICS CO.,LTD.

Property of Ligitek Only

PART NO. LDD535/65-XX/NDP


Page 2/7

Internal Circuit Diagram

LDD5355-XX/NDP



LDD5365-XX/NDP

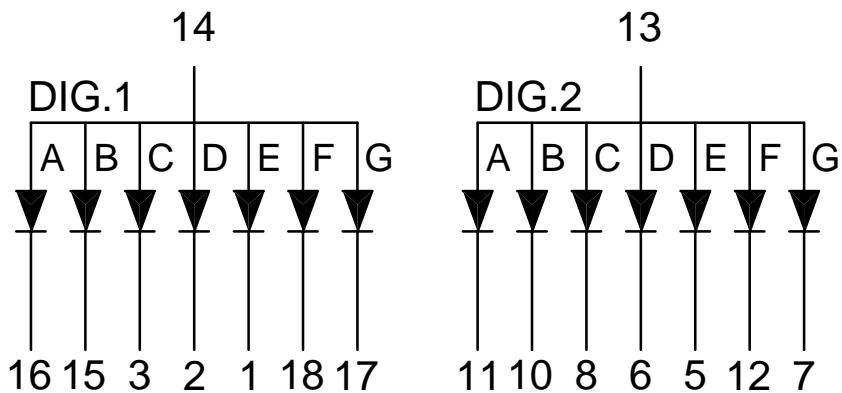



LIGITEK

LIGITEK ELECTRONICS CO.,LTD.
Property of Ligitek Only

PART NO. LDD535/65-XX/NDP

Page 3/7

Electrical Connection

PIN NO.1	LDD5355-XX/NDP	PIN NO.1	LDD5365-XX/NDP
1	Anode E DIG.1	1	Cathode E DIG.1
2	Anode D DIG.1	2	Cathode D DIG.1
3	Anode C DIG.1	3	Cathode C DIG.1
4	Nc	4	Nc
5	Anode E DIG.2	5	Cathode E DIG.2
6	Anode D DIG.2	6	Cathode D DIG.2
7	Anode G DIG.2	7	Cathode G DIG.2
8	Anode C DIG.2	8	Cathode C DIG.2
9	Nc	9	Nc
10	Anode B DIG.2	10	Cathode B DIG.2
11	Anode A DIG.2	11	Cathode A DIG.2
12	Anode F DIG.2	12	Cathode F DIG.2
13	Common Cathode Dig.2	13	Common Anode Dig.2
14	Common Cathode Dig.1	14	Common Anode Dig.1
15	Anode B DIG.1	15	Cathode B DIG.1
16	Anode A DIG.1	16	Cathode A DIG.1
17	Anode G DIG.1	17	Cathode G DIG.1
18	Anode F DIG.1	18	Cathode F DIG.1



LIGITEK

LIGITEK ELECTRONICS CO.,LTD.

Property of Ligitek Only

PART NO. LDD535/65-XX/NP

Page 4/7

Absolute Maximum Ratings at Ta=25

Parameter	Symbol	Ratings		UNIT
		SR		
Forward Current Per Chip	I _F	30		mA
Peak Forward Current Per Chip (Duty 1/10,0.1ms Pulse Width)	I _{FP}	100		mA
Power Dissipation Per Chip	P _D	100		mW
Reverse Current Per Any Chip	I _r	10		μA
Operating Temperature	T _{opr}	-25 ~ +85		
Storage Temperature	T _{stg}	-25 ~ +85		
Solder Temperature 1-16 Inch Below Seating Plane For 3 Seconds At 260				

Part Selection And Application Information(Ratings at 25)

PART NO	CHIP		common cathode or anode	P (nm)	(nm)	Electrical				IV-M	
						Vf(v)		Iv(mcd)			
	Material	Emitted				Min.	Typ.	Max.	Min.	Typ.	
LDD5355-XX/NP	GaAlAs	Red	Common Anode	660	20	1.5	1.7	2.4	3.05	5.0	2:1
LDD5365-XX/NP			Common Cathode								

Note : 1.The forward voltage data did not including ±0.1V testing tolerance.

2. The luminous intensity data did not including ±15% testing tolerance.



LIGITEK

LIGITEK ELECTRONICS CO.,LTD.

Property of Ligitek Only

PART NO. LDD535/65-XX/NDP

Page 5/7

Test Condition For Each Parameter

Parameter	Symbol	Unit	Test Condition
Forward Voltage Per Chip	Vf	volt	If=20mA
Luminous Intensity Per Chip	Iv	mcd	If=10mA
Peak Emission Wavelength	P	nm	If=20mA
Spectral Line Half-Width		nm	If=20mA
Reverse Current Any Chip	Ir	µ A	Vr=5V
Luminous Intensity Matching Ratio	IV-M		



LIGITEK

LIGITEK ELECTRONICS CO.,LTD.

Property of Ligitek Only

PART NO. LDD535/65-XX/NDP

Page 6/7

Typical Electro-Optical Characteristics Current

SR CHIP

Fig.1 Forward current vs. Forward Voltage

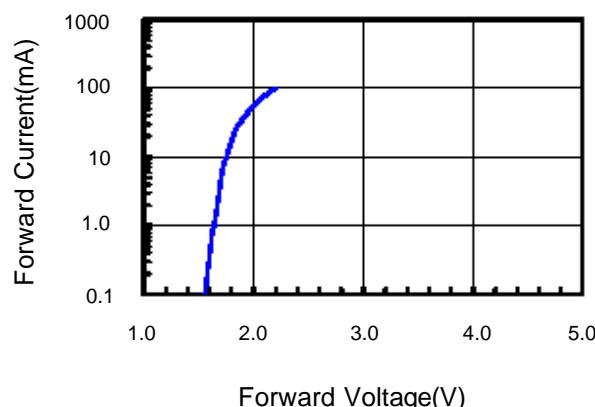


Fig.2 Relative Intensity vs. Forward Current

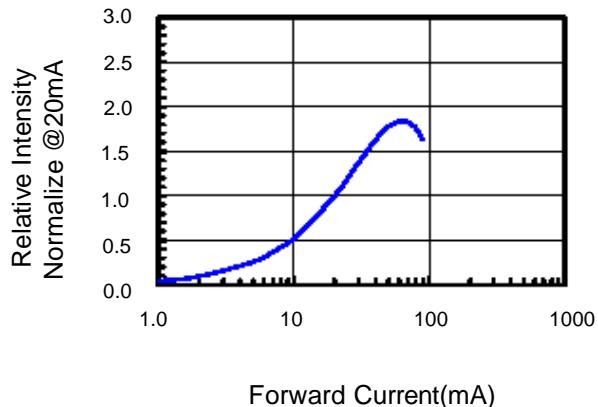


Fig.3 Forward Voltage vs. Temperature

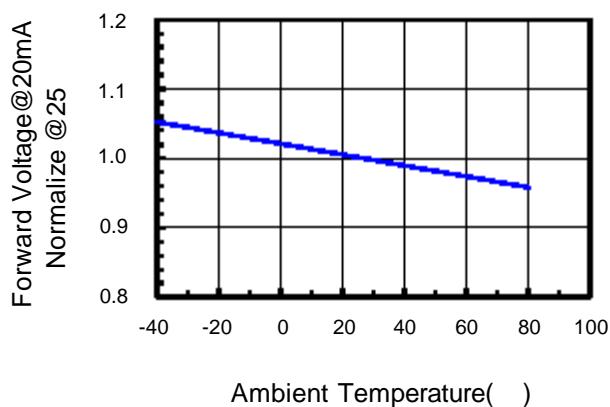


Fig.4 Relative Intensity vs. Temperature


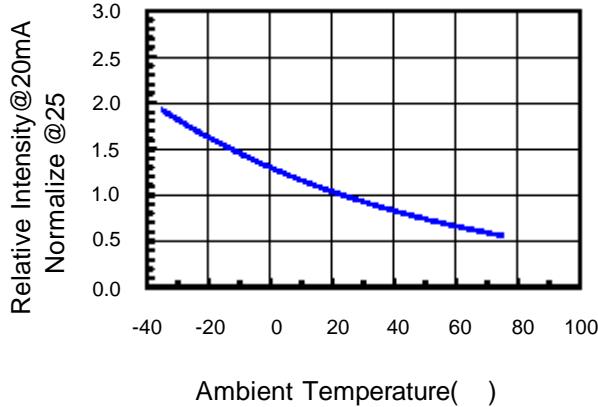


Fig.5 Relative Intensity vs. Wavelength



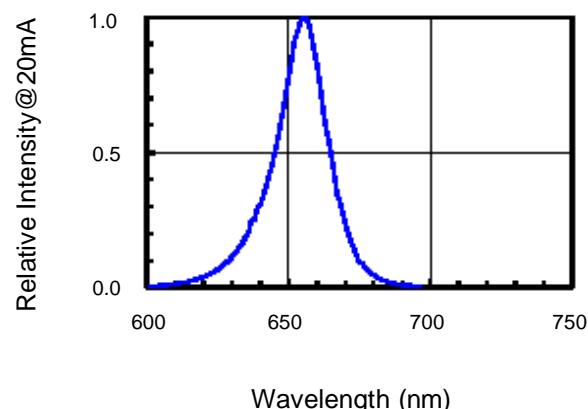

LIGITEK

LIGITEK ELECTRONICS CO., LTD.

Property of Ligitek Only

PART NO. LDD535/65-XX/NDP

Page 7/7

Reliability Test:

Test Item	Test Condition	Description	Reference Standard
Operating Life Test	1.Under Room Temperature 2.If=10mA 3.t=1000 hrs (-24hrs, +72hrs)	This test is conducted for the purpose of determining the resistance of a part in electrical and thermal stressed.	MIL-STD-750: 1026 MIL-STD-883: 1005 JIS C 7021: B-1
High Temperature Storage Test	1.Ta=105 ±5 2.t=1000 hrs (-24hrs, +72hrs)	The purpose of this is the resistance of the device which is laid under condition of high temperature for hours.	MIL-STD-883:1008 JIS C 7021: B-10
Low Temperature Storage Test	1.Ta=-40 ±5 2.t=1000 hrs (-24hrs, +72hrs)	The purpose of this is the resistance of the device which is laid under condition of low temperature for hours.	JIS C 7021: B-12
High Temperature High Humidity Test	1.Ta=65 ±5 2.RH=90%~95% 3.t=240hrs ±2hrs	The purpose of this test is the resistance of the device under tropical for hours.	MIL-STD-202:103B JIS C 7021: B-11
Thermal Shock Test	1.Ta=105 ±5 &-40 ±5 (10min) (10min) 2.total 10 cycles	The purpose of this is the resistance of the device to sudden extreme changes in high and low temperature.	MIL-STD-202: 107D MIL-STD-750: 1051 MIL-STD-883: 1011
Solder Resistance Test	1.T.Sol=260 ±5 2.Dwell time= 10 ±1sec.	This test intended to determine the thermal characteristic resistance of the device to sudden exposures at extreme changes in temperature when soldering the lead wire.	MIL-STD-202: 210A MIL-STD-750: 2031 JIS C 7021: A-1
Solderability Test	1.T.Sol=230 ±5 2.Dwell time=5 ±1sec	This test intended to see soldering well performed or not.	MIL-STD-202: 208D MIL-STD-750: 2026 MIL-STD-883: 2003 JIS C 7021: A-2