

ROITHNER LASERTECHNIK

A-1040 WIEN, FLEISCHMANNGASSE 9

TEL: +43 -1- 586 52 43 FAX: +43 -1- 586 41 43

e-mail: office@roithner-laser.com <http://www.roithner-laser.com>

383UGC TECHNICAL DATA


GREEN GaP LED

Technology: **GaP structure**

Peak Wavelength: **570 nm typ.**

Luminous Intensity: **620 mcd typ.**

Package: **5 mm clear plastic**

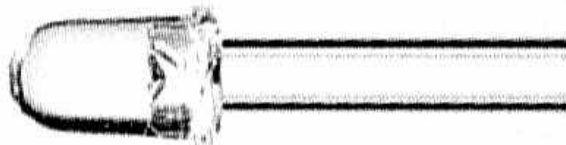

Absolute Maximum Ratings (Tc=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Reverse Voltage	V _R	5	V
Reverse Current	I _R	10	μA
Soldering Temperature	T _S	260	°C for 5 s
Operating Temperature	T _{OP}	-40 .. +85	°C
Storage Temperature	T _{STG}	-40 .. +100	°C

Optical-Electrical Characteristics (Tc = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Luminous Intensity	L _{I (570 nm)}	I _F = 20 mA	415	620		mcd
Forward Voltage	V _F	I _F = 20 mA	1.5	1.7	2.8	V
Forward Current	I _F	cw		20	30	mA
Peak Forward Current	I _P	Dutycycle 0.1 @ 1 kHz			160	mA
Power Dissipation	P _D			100		mW
Peak Wavelength	λ _P	I _F = 20 mA		570		nm
Spectrum Half Width	Δλ	I _F = 20 mA		30		nm
Viewing Angle	2θ ½	I _F = 20 mA		12		°