


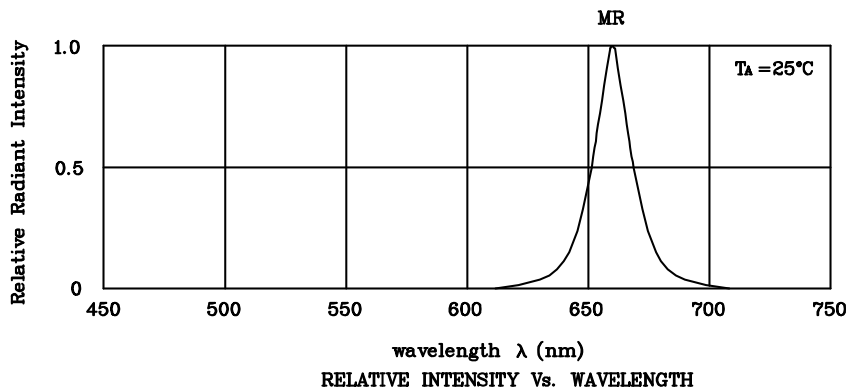
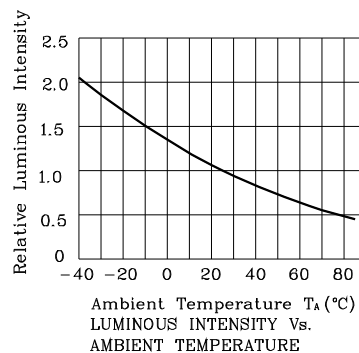

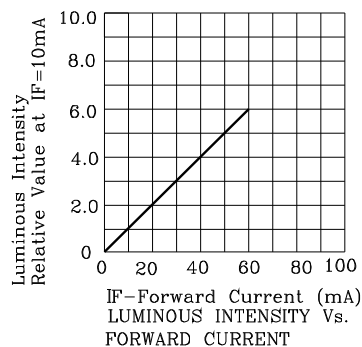
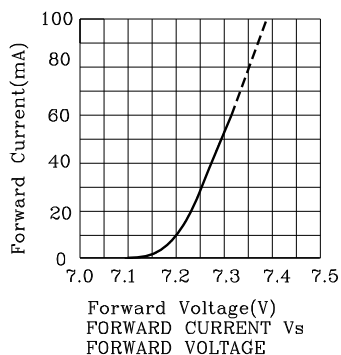
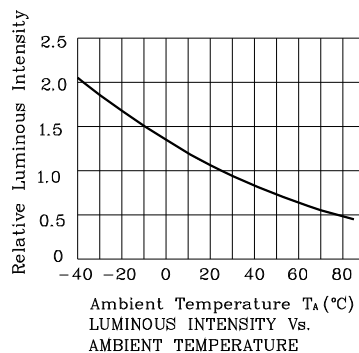


Part Number	Emitting Color	Emitting Material	Luminous Intensity (IF=10mA) ucd	Wavelength nm λ P	Description
			min.	typ.	
DMR100C	Red	GaAlAs	26000	104990	660 Common Cathode, Rt. Hand Decimal
Published Date : MAR 12,2008		Drawing No : SDSA2192		V3	Checked : Shin Chi P.1/5

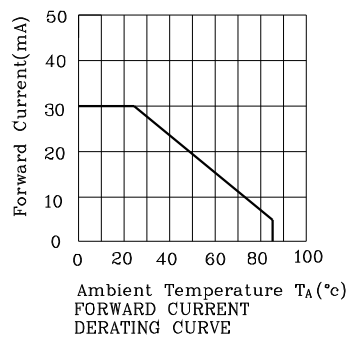


❖ **MR**





DMR100C

Wave Soldering Profile For Lead-free Through-hole LED.

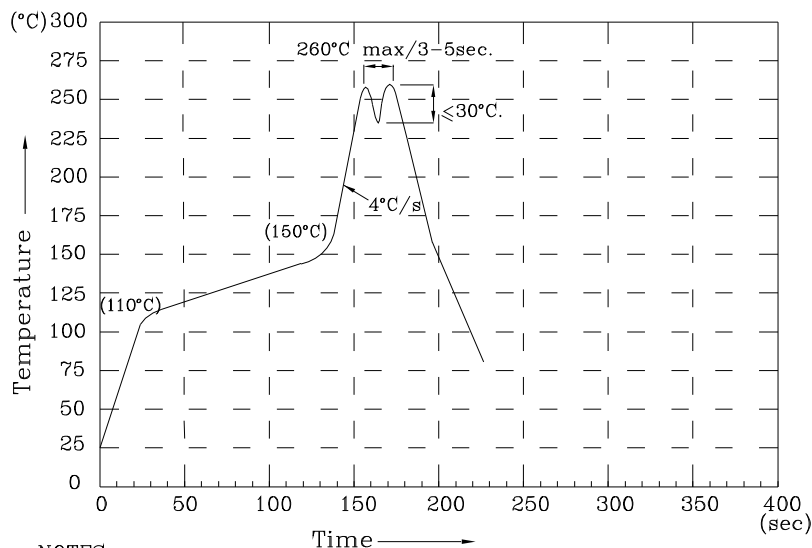

NOTES:

- 1.Recommend the wave temperature 245°C~260°C.The maximum soldering temperature should be less than 260°C.
- 2.Do not apply stress on epoxy resins when temperature is over 85 degree°C.
- 3.The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
- 4.No more than once.

Remarks:


If special sorting is required (e.g. binning based on forward voltage, Luminous intensity / luminous flux, or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous intensity / luminous flux: +/-15%
3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

PACKING & LABEL SPECIFICATIONS

DMR100C

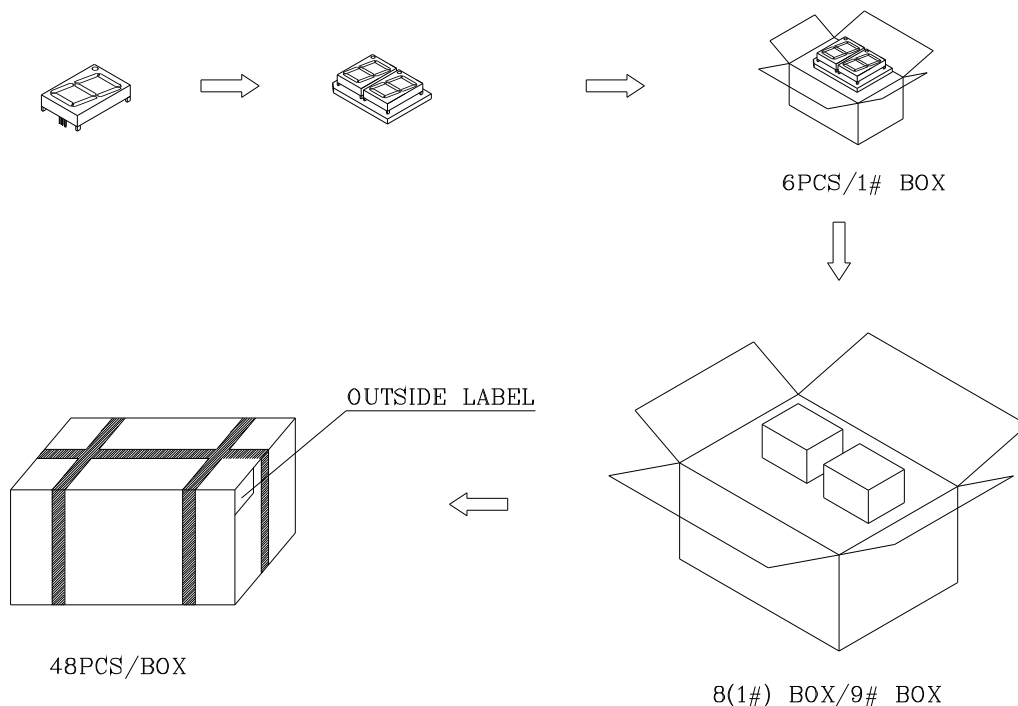

Inside LABEL Paste On The IC-tube

SunLED	PART NO: Dxx100x	QTY: 6 PCS	CODE: xx	Q.C. PASSED xx xx xx FQC
XXXXXXXXXX-XXXX				RoHS Compliant
LOT NO.				Date Number OF FQC

Outside LABEL Paste On The Box

BOX Number	XXXX	XXXX	BIN CODE
Dxx100x	48	xx	Number OF QA
QAX xx xx xx PASSED			Date