

RoHS Compliant Product

Description

The SMG2306 utilized advanced processing techniques to achieve the lowest possible on-resistance, extremely efficient and cost-effectiveness device.

The SOT-23 package is universally used for all commercial-industrial applications


Features

- * Capable of 2.5V gate drive
- * Lower on-resistance
- * Reliable and Rugged

Applications

- * Power Management in Notebook Computer
- * Portable Equipment
- * Battery Powered System

Marking : 2306

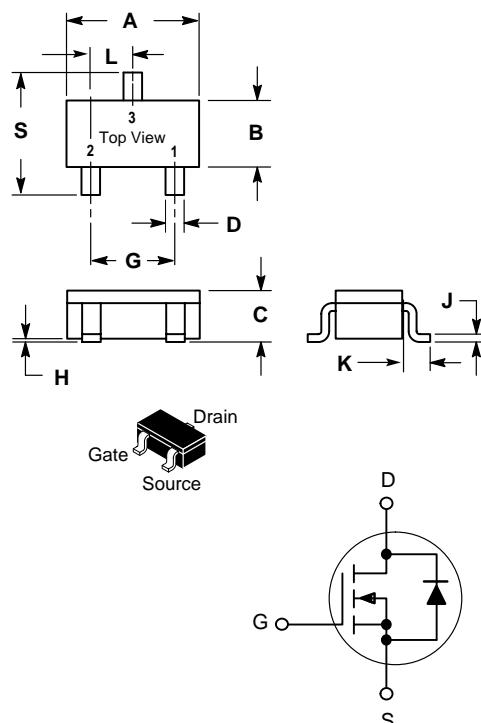

| SC-59 | | |
|-------|------|------|
| Dim | Min | Max |
| A | 2.70 | 3.10 |
| B | 1.40 | 1.60 |
| C | 1.00 | 1.30 |
| D | 0.35 | 0.50 |
| G | 1.70 | 2.10 |
| H | 0.00 | 0.10 |
| J | 0.10 | 0.26 |
| K | 0.20 | 0.60 |
| L | 0.85 | 1.15 |
| S | 2.40 | 2.80 |

All Dimension in mm

Absolute Maximum Ratings

| Parameter | Symbol | Ratings | Unit |
|--|---------------------------------------|----------|------|
| Drain-Source Voltage | V _{DS} | 20 | V |
| Gate-Source Voltage | V _{GS} | ±12 | V |
| Continuous Drain Current, ³ V _{GS} @4.5V | I _D @T _A =25 °C | 5.3 | A |
| Continuous Drain Current, ³ V _{GS} @4.5V | I _D @T _A =70 °C | 4.3 | A |
| Pulsed Drain Current | I _{DM} | 10 | A |
| Total Power Dissipation | P _D @T _A =25 °C | 1.38 | W |
| Linear Derating Factor | | 0.01 | W/°C |
| Operating Junction and Storage Temperature Range | T _j , T _{stg} | -55~+150 | °C |

Thermal Data

| Parameter | Symbol | Ratings | Unit |
|--|--------------------|---------|------|
| Thermal Resistance Junction-ambient ³ | R _{thj-a} | 90 | °C/W |



Elektronische Bauelemente

SMG23065.3A, 20V, R_{DSON} 32mΩ

N-Channel Enhancement Mode Power Mos.FET

Electrical Characteristics(T_j=25°C Unless otherwise specified)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
|---|-----------------------------------|------|------|------|------|---|
| Drain-Source Breakdown Voltage | V _{DSS} | 20 | — | — | V | V _{GS} =0V, I _D =250μA |
| Breakdown Voltage Temp. Coefficient | ΔV _{Ds} /ΔT _j | — | 0.1 | — | V/°C | Reference to 25°C, I _D =1mA |
| Gate Threshold Voltage | V _{GS(th)} | 0.5 | — | 1.2 | V | V _{Ds} =V _{GS} , I _D =250μA |
| Gate-Source Leakage Current | I _{GSS} | — | — | ±100 | nA | V _{GS} =±12V |
| Drain-Source Leakage Current (T _j =25°C) | I _{DSS} | — | — | 1 | uA | V _{DS} =20V, V _{GS} =0 |
| Drain-Source Leakage Current (T _j =70°C) | | — | — | 10 | uA | V _{DS} =16V, V _{GS} =0 |
| Static Drain-Source On-Resistance ² | R _{DSON} | — | — | 30 | mΩ | V _{GS} =10V, I _D =5.5A |
| | | — | — | 35 | | V _{GS} =4.5V, I _D =5.3A |
| | | — | — | 50 | | V _{GS} =2.5V, I _D =2.6A |
| | | — | — | 90 | | V _{GS} =1.8V, I _D =1A |
| Total Gate Charge ² | Q _g | — | 8.7 | — | nC | I _D =5.3A V _{DS} =10V V _{GS} =4.5V |
| Gate-Source Charge | Q _{gs} | — | 1.5 | — | | |
| Gate-Drain ("Miller") Charge | Q _{gd} | — | 3.6 | — | | |
| Turn-on Delay Time ² | T _{d(on)} | — | 6 | — | nS | V _{DS} =15V I _D =1A V _{GS} =10V R _G =2Ω R _D =15Ω |
| Rise Time | T _r | — | 14 | — | | |
| Turn-off Delay Time | T _{d(off)} | — | 18.4 | — | | |
| Fall Time | T _f | — | 2.8 | — | | |
| Input Capacitance | C _{iss} | — | 603 | — | pF | V _{GS} =0V V _{DS} =15V f=1.0MHz |
| Output Capacitance | C _{oss} | — | 144 | — | | |
| Reverse Transfer Capacitance | C _{rss} | — | 111 | — | | |
| Forward Transconductance | G _{fs} | — | 13 | — | S | V _{DS} =5V, I _D =5.3A |

Source-Drain Diode

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
|---------------------------------|-----------------|------|------|------|------|--|
| Forward On Voltage ² | V _{SD} | — | — | 1.2 | V | I _s =1.2A, V _{GS} =0V. |
| Reverse Recovery Time | T _{rr} | — | 16.8 | — | nS | I _s =5A, V _{GS} =0V dI/dt=100A/uS |
| Reverse Recovery Charge | Q _{rr} | — | 11 | — | | |

Notes: 1.Pulse width limited by Max. junction temperature.

2.Pulse width≤300us, dutycycle≤2%.

3.Surface mounted on 1 inch² copper pad of FR4 board; 270°C/W when mounted on min. copper pad.

Characteristics Curve

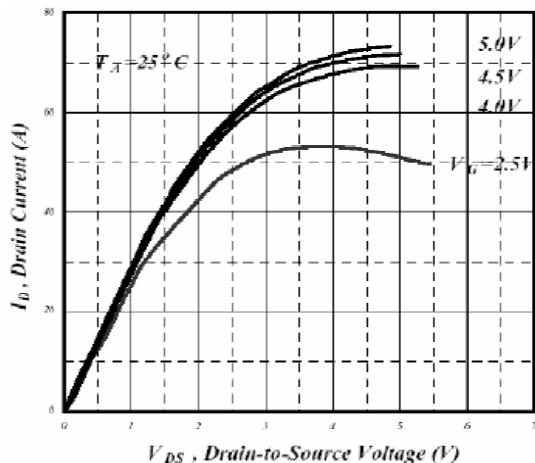


Fig 1. Typical Output Characteristics

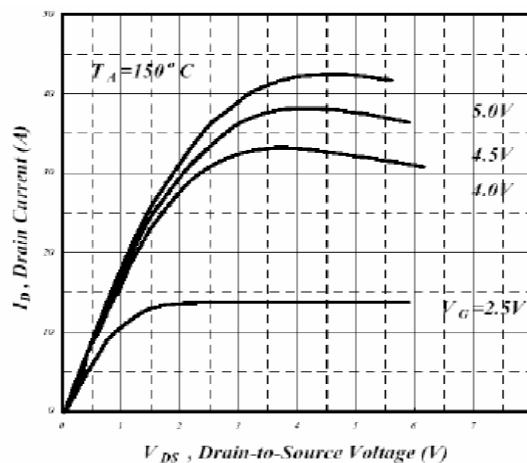


Fig 2. Typical Output Characteristics

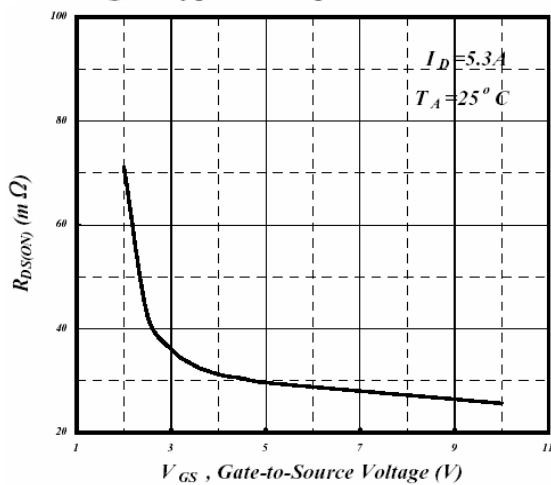


Fig 3. On-Resistance v.s. Gate Voltage

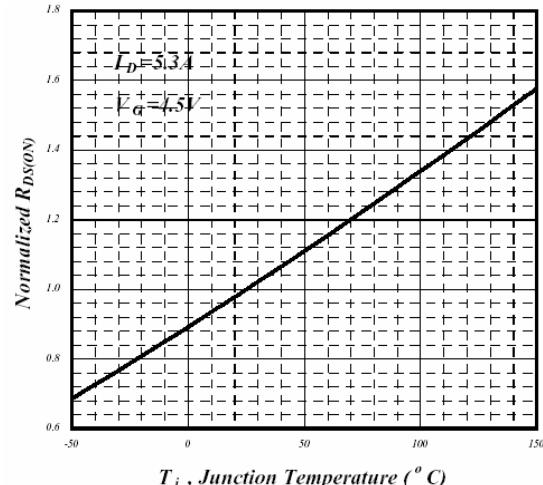


Fig 4. Normalized On-Resistance v.s. Junction Temperature

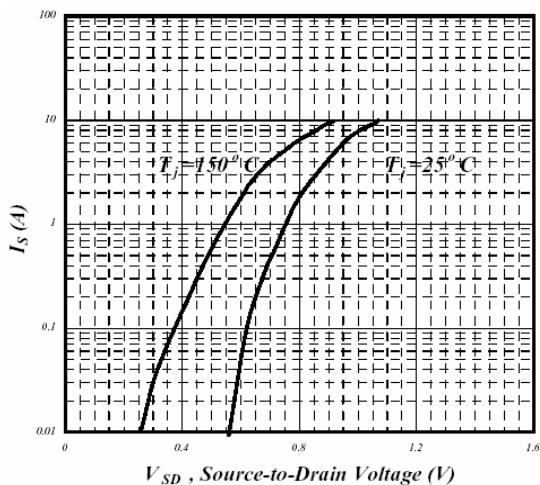


Fig 5. Forward Characteristic of Reverse Diode

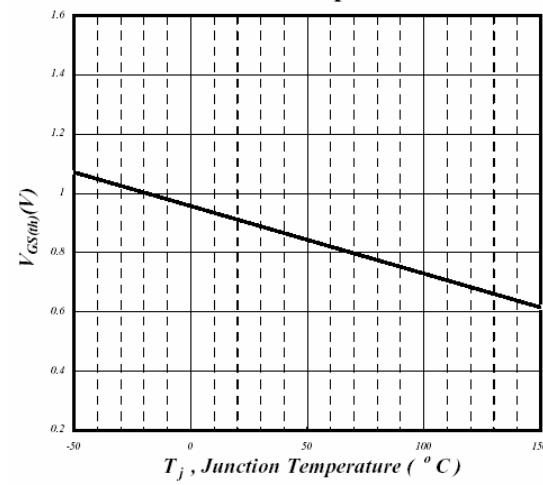


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

SECO

Elektronische Bauelemente

SMG2306

5.3A, 20V, R_{DSON} 32mΩ

N-Channel Enhancement Mode Power Mos.FET

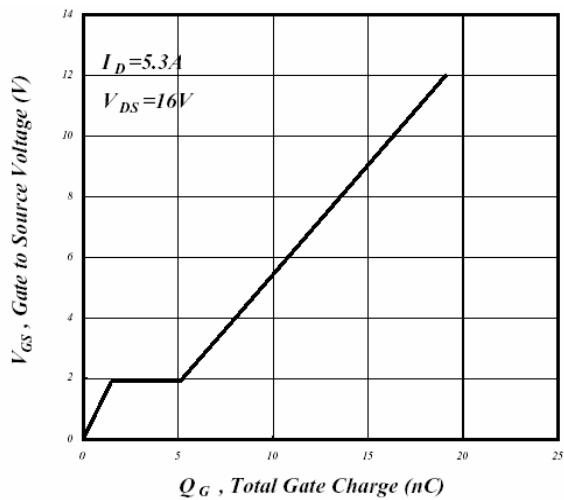


Fig 7. Gate Charge Characteristics

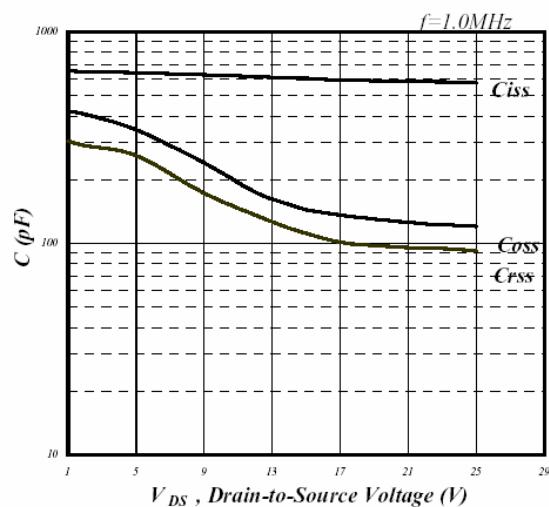


Fig 8. Typical Capacitance Characteristics

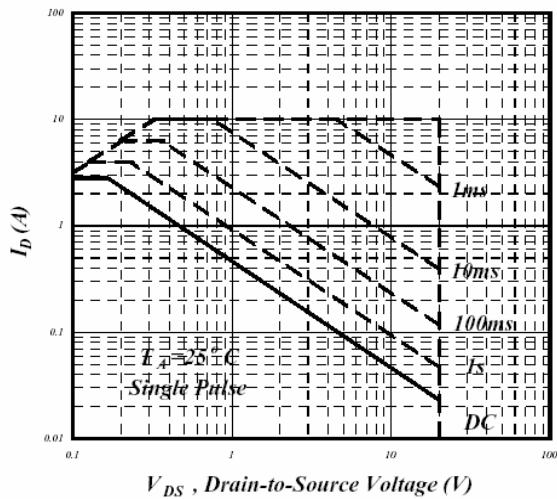


Fig 9. Maximum Safe Operating Area

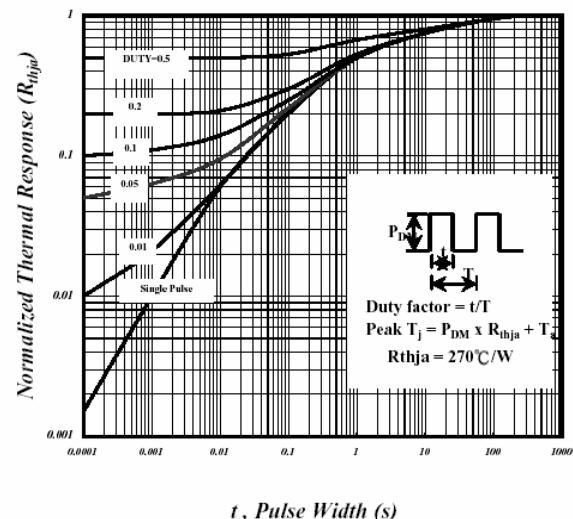


Fig 10. Effective Transient Thermal Impedance

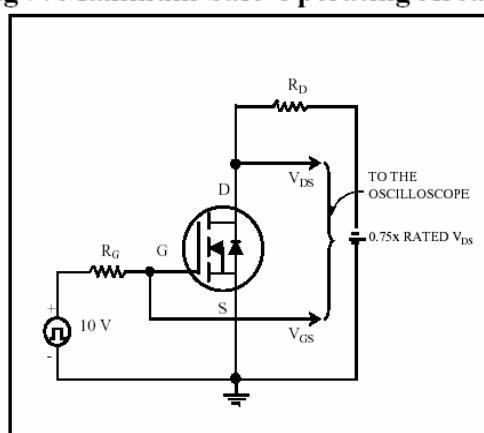


Fig 11. Switching Time Circuit

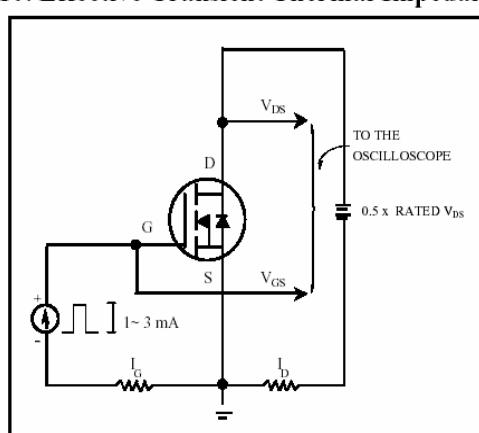


Fig 12. Gate Charge Circuit