

TITLE

TRANSMIT TRANSFORMER, TI 100 •






1000 PARKERS LAKE ROAD  
WAYZATA, MN 55391  
(952)475-1173

PART NUMBER **22610**

REV F PAGE 1 END

### SPECIFICATIONS

1. INDUCTANCE: (1-5) @ 200Khz, 1V = 1.5 mhy, MIN.
2. LEAKAGE INDUCTANCE: (1-5) @ 300Khz,  
(2-6) SHORTED = 0.4uhy, MAX
3. INTERWINDING CAPACITANCE: (1-5) TO (2-6)  
@ 300Khz = 32pf, MAX
4. TURNS RATIO: (1-5) : (2-6) = 1:1.17
5. DC RESISTANCE: (1-5) = 0.5 OHM, NOM.  
(2-6) = 0.6 OHM, NOM.
6. HI-POT: 1500 Vac
7. This transformer to operate with crystal CS61574/35  
transmit in TI applications with 100 • cable impedance

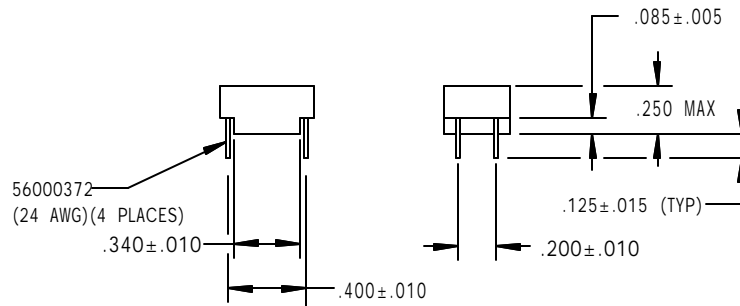

CUSTOMER APPROVAL REQUIRED FOR ANY FORM, FIT OR FUNCTION CHANGES

TOLERANCES	2 PLACE	3 PLACE	ANGLE
UNLESS OTHERWISE NOTED	+ -	+ -	+ °