


Pin No.	1	2	3	4	5	6	7	8	9	10	11 - 18	19	20
Symbol	HEATER -	THERMISTOR +	THERMISTOR -	HEATER +	VSS	VDD(+5V)	NC	RS	R/W	E	DB0 - DB7	LED+	LED-

NOTE:

1. DISPLAY MODE: STN- TRANSPARENT- POSITIVE- YELLOW
2. CONTROLLER: KS0066U OR COMPATIBLE
3. ON BOARD NEGATIVE VOLTAGE GENERATOR AND TEMPERATURE COMPENSATION CIRCUIT
4. LCD HEATER BUILD IN (PROVIDED BY CUSTOMER)
5. BACKLIGHT: LED, PURE GREEN, WAVELENGTH=557nm, If=180mA, Vf=4.2V
6. OP. TEMP.: -20°C TO 75°C, ST. TEMP.: -40°C TO 85°C
7. ALL DIMENSION UNIT ARE IN mm, TOLERANCE UNLESS SPECIFIED: ±0.3 mm
8. LCD DRIVER: 1/16DUTY, 1/5BIAS, VOP=9.6V, VDD=5.0V
9. VIEWING DIRECTION: 6:00

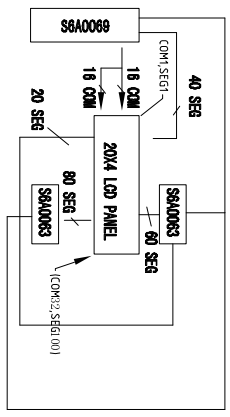

更改记录				设计	审核	工艺	标准化	批准	产品型号
更改标记	日期	更改内容	设计	审核	批准	设计	审核	工艺	标准化
						签名			HG2004030-1YF62L-VA
						日期			C2004030-WX
						未注公差			文件编号
						±0.2			分文件号
									页数
									1
									单位
									mm

HTDISP4030-1YF62L-VA

