



TOLERANCE UNLESS SPECIFIED =

.XXX = +/- .005


.XX = +/- .015

FRACTIONS = +/- .032

36-070.DC2

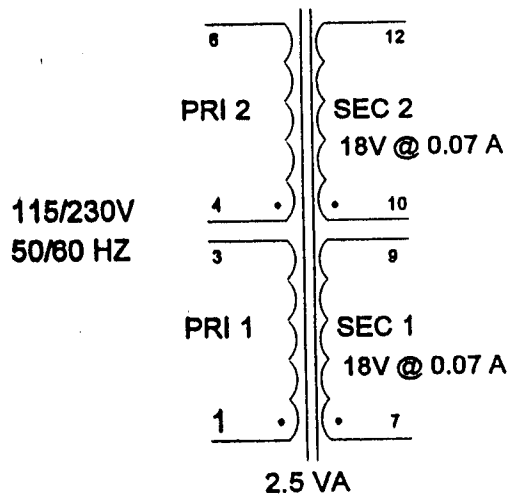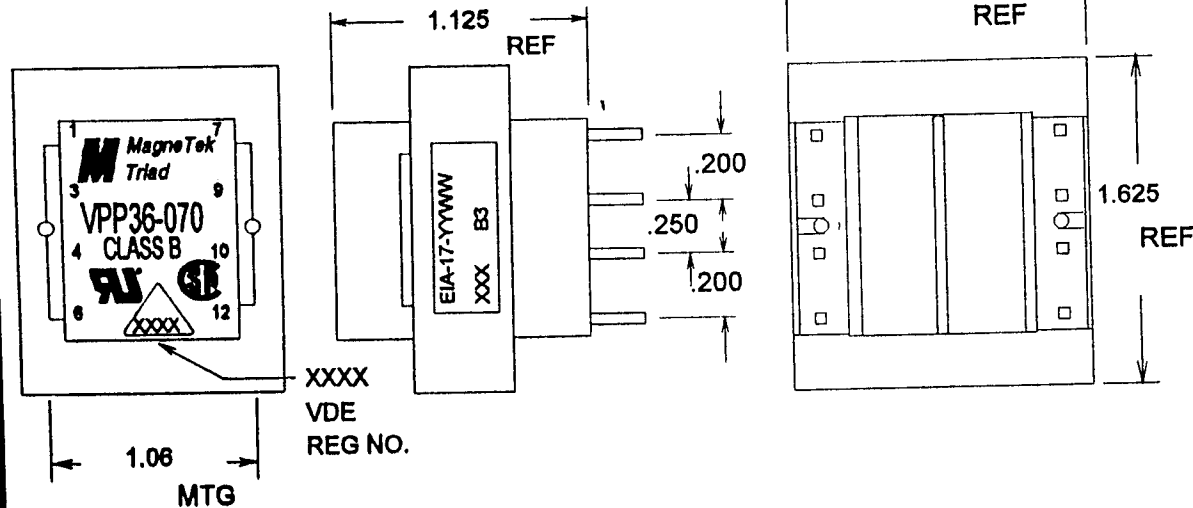

PC PINS .025 SQ

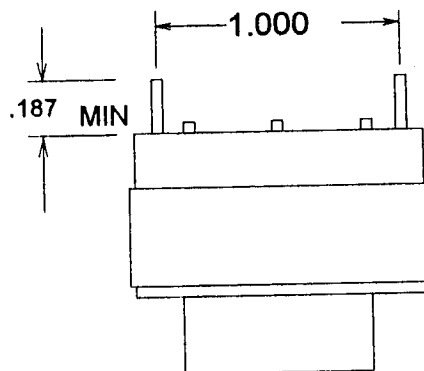

PRODUCTION TESTS

| | |
|-----------------------|------------------|
| Turns Ratio = | 100% |
| DC RESISTANCE IN OHMS | 1-3 = 723 NOM |
| | 4-6 = 902 NOM |
| | 7-9 = 38 NOM |
| | 10-12 = 46.5 NOM |

| | |
|---------------------------|---------|
| MAX EXCITATION CURRENT = | 0.008 A |
| APPLY 230V 60HZ 1-6 (3+4) | |
| PRI WDGS 114.5 TO 115.5 V | |
| SEC WDGS 23.7 TO 24.9 V | |

| | |
|--------|--------------------|
| HIPOT: | 4000V P-S |
| | 4000V P,S, TO CORE |
| | 600 V P-P, S-S |

CONTINUITY = 100% PRI'S IN FINAL

FINAL ASSEMBLY NOTES

MagneTek

VPP36-070