


液晶之友 电话: 020-33819057
 Http://www.lcdfriends.com




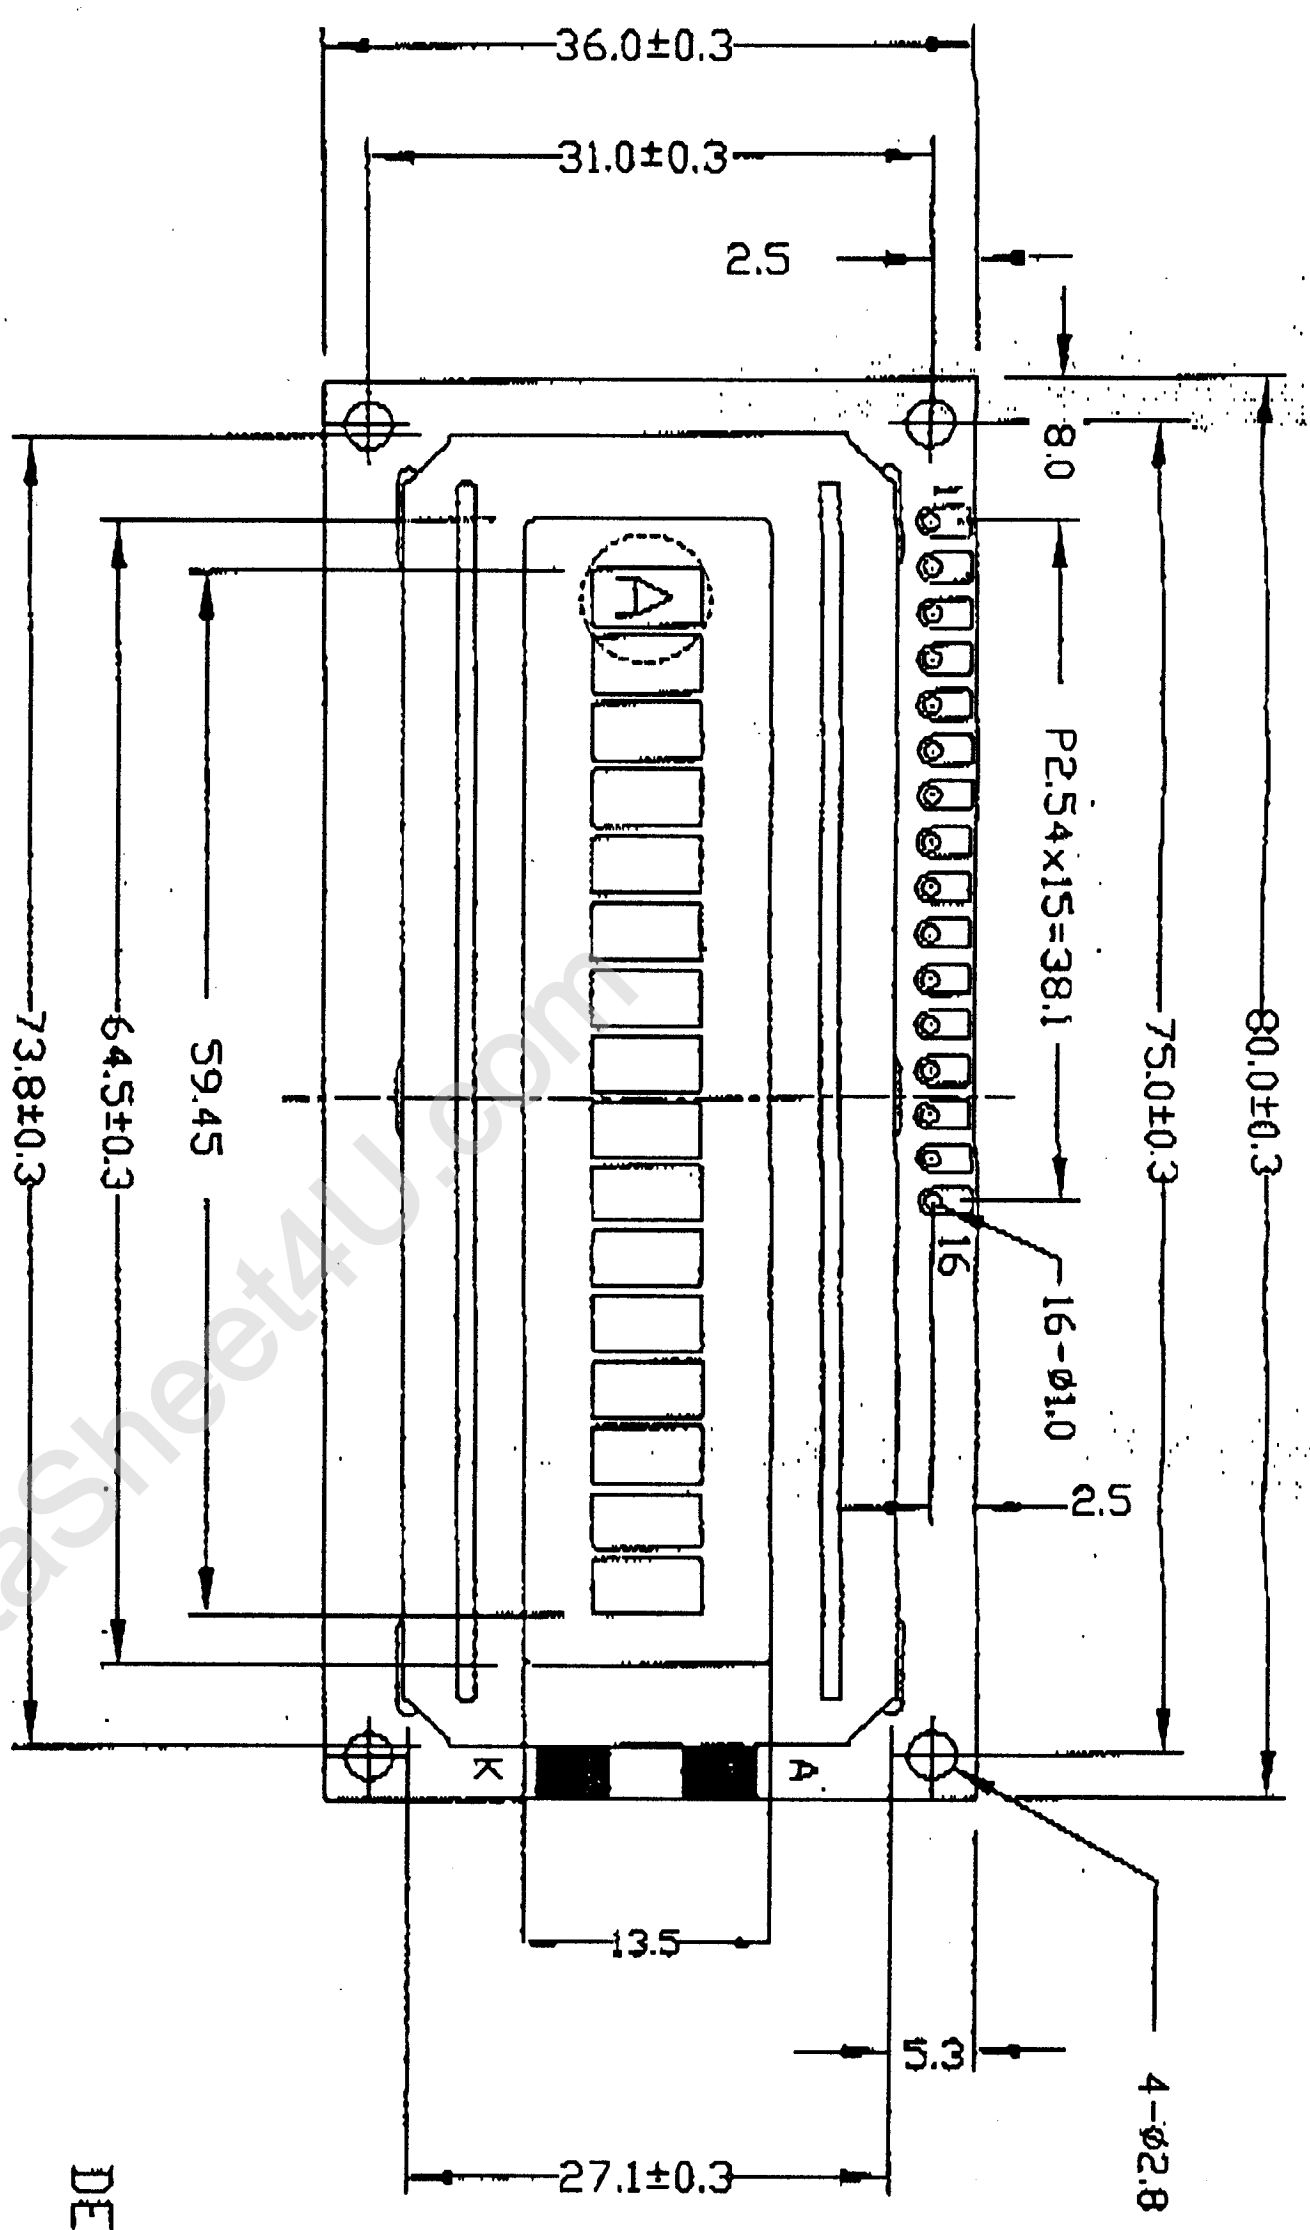

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vcc	Veel	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

NOTE:

1. DISPLAY TYPE: STN/YELLOW-GREEN MODE
2. VIEWING DIRECTION: 12:00
3. POLARIZER MODE: TRANSPARENT/POSITIVE
4. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
5. LCD OPERATING VOLTAGE: 4.7V
6. OPERATING TEMP: -20°C-+70°C
7. STORAGE TEMP: -30°C-+80°C
8. LED BACKLIGHT: LED/YELLOW (4.2V)
9. CONTROLLER: S6A0069X01-C0CX
10. BEZEL IS TO BE PAINTED BLACK
11. ALL UNMARKED TOLERANCE: ±0.3mm

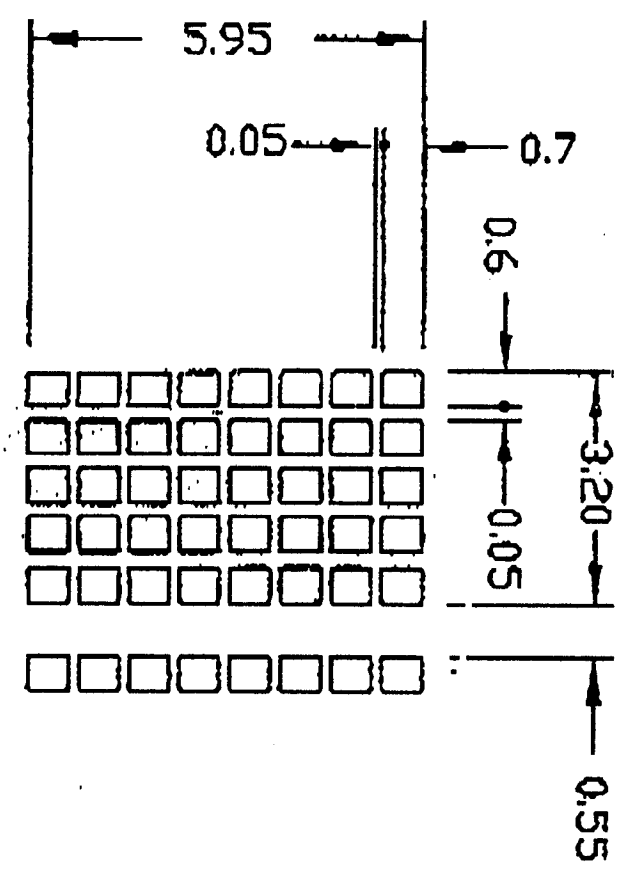DETAIL A:




PLAN-MA MICROELECTRONICS CO.
 22/F., CASTIC Building, Shennan Road Central, Shenzhen, China
 DRAWN BY: *[Signature]* TITLE: TM161ABCWU6
 CHECKED BY: *[Signature]*
 APPROVED BY: *[Signature]* DWG NO: G-2
 CONFIRMED BY: *[Signature]* DWG NAME: TM161ABCWU6G-2 SHEET NO: 1 OF 1
 SCALE:  UNIT: mm