



**Solid State Devices, Inc.**

14830 Valley View Blvd \* La Mirada, Ca 90638


Phone: (562) 404-7855 \* Fax: (562) 404-1773

[ssdi@ssdi-power.com](mailto:ssdi@ssdi-power.com) \* [www.ssdi-power.com](http://www.ssdi-power.com)

**SFT3439S.22**

**1 A /450 Volts  
NPN Switching Transistor**

**DESIGNER'S DATA SHEET**

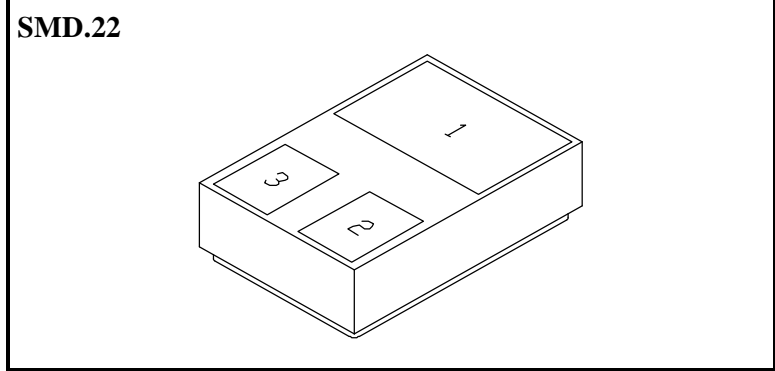


- Features:**
- Switching Transistor
  - Small Footprint Surface Mount Device with Excellent Thermal Properties
  - Replacement/Enhancement for 2N3439UA
  - TX, TXV, S-Level Screening Available
  - PNP Complimentary Parts Available

Maximum Ratings	Symbol	Value	Units
Collector – Emitter Voltage	$V_{CEO}$	350	Volts
Collector – Base Voltage	$V_{CBO}$	450	Volts
Emitter – Base Voltage	$V_{EBO}$	7	Volts
Continuous Collector Current	$I_C$	1	Amps
Power Dissipation @ $T_C = 25^\circ C$	$P_D$	5	W
Power Dissipation @ $T_C = 25^\circ C$		0.7	
Operating & Storage Temperature	Top & Tstg	-65 to +200	$^\circ C$
Maximum Thermal Resistance	Junction to Case	7.5 (typ 5)	$^\circ C/W$
	Junction to Ambient		

Note1: Derated 133 mW/ $^\circ C$  above  $T_c = 162.5^\circ C$

Note2: Derated 4 mW/ $^\circ C$  above  $T_A = 25^\circ C$

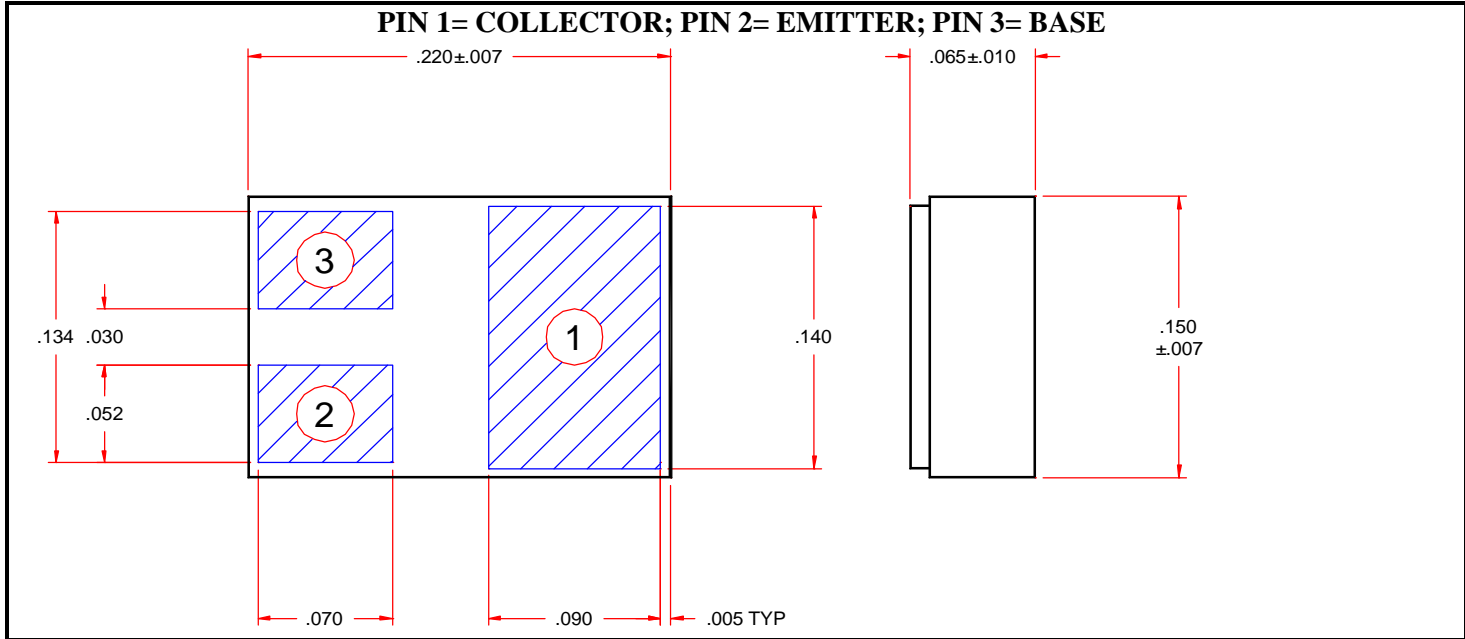

**NOTE:** All specifications are subject to change without notification. SSD's for these devices should be reviewed by SSDI prior to release.

**DATA SHEET #: TR0086A**

**DOC**



**Solid State Devices, Inc.**

14830 Valley View Blvd \* La Mirada, Ca 90638

Phone: (562) 404-7855 \* Fax: (562) 404-1773

ssdi@ssdi-power.com \* www.ssdi-power.com

# SFT3439S.22

Electrical Characteristics <sup>4/</sup>	Symbol	Min	Typ	Max	Units
Collector Cutoff Current	$V_{CB} = 360\text{ V}$ $I_{CBO1}$	—	0.05	2	mA
	$V_{CB} = 450\text{ V}$ $I_{CBO2}$	—	0.1	5	
	$V_{CB} = 360\text{ V}, T_A = 150^\circ\text{C}$ $I_{CBO3}$	—	—	100	
Collector Cutoff Current	$V_{CE} = 300\text{ V}$ $I_{CEO}$	—	0.02	2	mA
Collector Cutoff Current	$V_{CE} = 450\text{ V}, V_{BE} = 1.5\text{ V}$ $I_{CEX1}$	—	—	5	mA
Emitter Cutoff Current	$V_{EB} = 7.0\text{ V}$ $I_{EBO}$	—	0.01	10	mA
DC Forward Current Transfer Ratio *	$V_{CE} = 10\text{ V}, I_C = 0.2\text{ mA}$ $H_{FE1}$	10	65	—	
	$V_{CE} = 10\text{ V}, I_C = 2\text{ mA}$ $H_{FE2}$	30	90	—	
	$V_{CE} = 10\text{ V}, I_C = 20\text{ mA}$ $H_{FE4}$	40	115	160	
	$V_{CE} = 10\text{ V}, I_C = 20\text{ mA}, T_a = -55^\circ\text{C}$ $H_{FE4}$	15	30	—	
Collector to Emitter Saturation Voltage	$I_C = 50\text{ mA}, I_B = 4\text{ mA}$ $V_{CE(sat)1}$	—	0.23	0.5	V
Base to Emitter Saturation Voltage	$I_C = 50\text{ mA}, I_B = 4\text{ mA}$ $V_{BE(sat)1}$	—	0.75	1.3	V
Frequency Transition (Small Signal Current Gain) @ f = 5 MHz	$V_{CE} = 10\text{ V}, I_C = 10\text{ mA}, f = 5\text{ MHz}$ $h_{fe}$	3	5.5	15	
Small Signal Current Gain @ f = 1 kHz	$V_{CE} = 10\text{ V}, I_C = 5\text{ mA}, f = 1\text{ kHz}$ $h_{fe}$	25	110	—	
Output Capacitance	$V_{CB} = 10\text{ V}, f = 1\text{ MHz}$ $C_{obo}$	—	8	10	pF
Input Capacitance	$V_{BE} = 5\text{ V}, f = 1\text{ MHz}$ $C_{ibo}$	—	35	75	pF
Pulse Response	$V_{CC} = 200\text{ V}, I_C = 20\text{ mA}, I_B = 2\text{ mA}$ $t_{on}$	—	—	1	ms
		$t_{off}$	—	—	
Safe Operating Area	$V_{CE} = 5\text{ V}, I_C = 1\text{ A}, t = 1\text{ s}$ $SOA1$				
	$V_{CE} = 350\text{ V}, I_C = 14\text{ mA}, t = 1\text{ s}$ $SOA2$				

**NOTES:**

\* Pulse Test: Pulse Width = 300µsec, Duty Cycle = 2%

1/ For Ordering Information, Price, Availability Contact Factory.

2/ Screening per MIL-PRF-19500

3/ For Package Outlines Contact Factory.

4/ Unless Otherwise Specified, All Electrical Characteristics @25°C.

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: TR0086A

DOC