

STANDARD CAPACITANCE TVS ARRAY
APPLICATIONS

- ✓ RS-232, RS-422 & RS-423
- ✓ Cellular Phones
- ✓ Control & Monitoring Systems
- ✓ Portable Electronics
- ✓ Wireless Bus Protection

IEC COMPATIBILITY (EN61000-4)

- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 24A, 8/20 μ s - Level 2(Line-Ground) & Level 3(Line-Line)

FEATURES

- ✓ ESD Protection > 40 kilovolts
- ✓ 500 Watts Peak Pulse Power per Line ($t_p = 8/20\mu$ s)
- ✓ Low Clamping Voltage
- ✓ Available in Multiple Voltage Types Ranging from 3V to 36V
- ✓ Unidirectional & Bidirectional Configurations
- ✓ RoHS Compliant

MECHANICAL CHARACTERISTICS

- ✓ Molded JEDEC SOT-23 Package
- ✓ Weight 8 milligrams (Approximate)
- ✓ Available in Lead-Free Pure-Tin Plating(Annealed)
- ✓ Solder Reflow Temperature:
Pure-Tin - Sn, 100: 260-270°C
- ✓ Consult Factory for Leaded Device Availability
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Tape and Reel Per EIA Standard 481
- ✓ Marking: Marking Code


PIN CONFIGURATIONS


PSOT03 thru PSOT36C

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	500	Watts
Operating Temperature	T_L	-55 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C
Forward Voltage @ 100mA, 300 μs - Square Wave (See Note 1)	V_F	1.5	Volts

Note 1: Applies to unidirectional pins only.

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (See Note 1)	DEVICE MARKING	RATED STAND-OFF VOLTAGE	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM LEAKAGE CURRENT	TYPICAL CAPACITANCE
		V_{WM} VOLTS	@ 1mA $V_{(BR)}$ VOLTS	@ $I_p = 1A$ V_C VOLTS	@ 8/20 μs $V_C @ I_{PP}$	@ V_{WM} I_D μA	@ 0V, 1 MHz C pF
PSOT03	03	3.3	4.0	6.5	10.9V @ 43.0A	125	500
PSOT03C	03C	3.3	4.0	7.0	10.9V @ 43.0A	125	300
PSOT05	05	5.0	6.0	9.8	13.5V @ 42.0A	20	350
PSOT05C	05C	5.0	6.0	9.8	13.5V @ 42.0A	20	210
PSOT08	08	8.0	8.5	13.4	16.9V @ 34.0A	10	250
PSOT08C	08C	8.0	8.5	13.4	16.9V @ 34.0A	10	150
PSOT12	12	12.0	13.3	19.0	25.9V @ 21.0A	2	150
PSOT12C	12C	12.0	13.3	19.0	25.9V @ 21.0A	2	90
PSOT15	15	15.0	16.7	24.0	30.0V @ 17.0A	1	100
PSOT15C	15C	15.0	16.7	24.0	30.0V @ 17.0A	1	60
PSOT24	24	24.0	26.7	43.0	49.0V @ 12.0A	1	88
PSOT24C	24C	24.0	26.7	43.0	49.0V @ 12.0A	1	63
PSOT36	36	36.0	40.0	51.0	76.8V @ 9.0A	1	80
PSOT36C	36C	36.0	40.0	51.0	76.8V @ 9.0A	1	60

Note 1: Part numbers with an additional "C" suffix are bidirectional devices, i.e., PSOT05C.

GRAPHS

FIGURE 1
PEAK PULSE POWER VS PULSE TIME

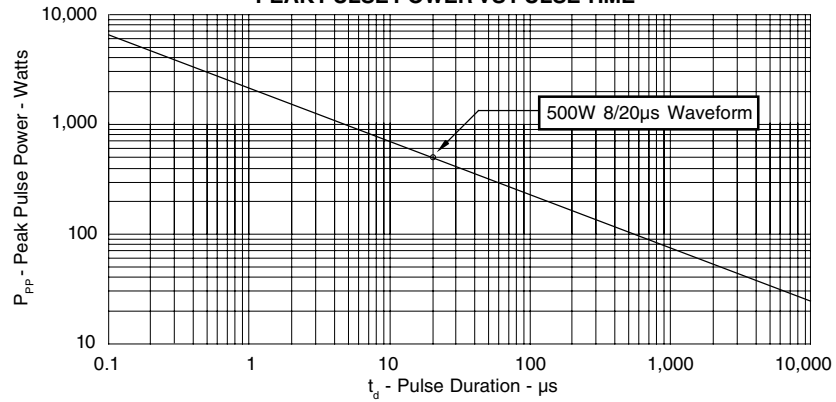


FIGURE 2
PULSE WAVE FORM


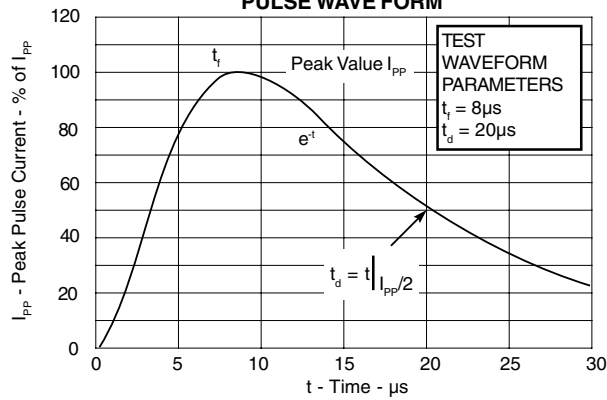


FIGURE 3
POWER DERATING CURVE

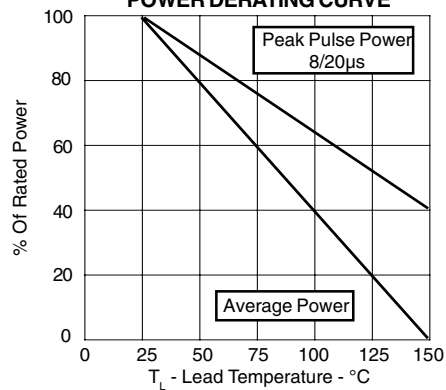

PSOT03 thru PSOT36C

SOT-23 PACKAGE OUTLINE & DIMENSIONS

PACKAGE OUTLINE		SOT-23			
		PACKAGE DIMENSIONS			
DIM	MILLIMETERS		INCHES		
	MIN	MAX	MIN	MAX	
A	2.80	3.04	0.1102	0.1197	
B	1.20	1.40	0.0472	0.0551	
C	0.89	1.11	0.0350	0.0440	
D	0.37	0.50	0.0150	0.0200	
G	1.78	2.04	0.0701	0.0807	
H	0.013	0.100	0.0005	0.0040	
J	0.085	0.177	0.0034	0.0070	
K	0.45	0.60	0.0180	0.0236	
L	0.89	1.02	0.0350	0.0401	
S	2.10	2.50	0.0830	0.0984	
V	0.45	0.60	0.0177	0.0236	

MOUNTING PAD	

NOTES
1. Dimensioning and tolerances per ANSI Y14.5M, 1985.
2. Controlling Dimension: Inches
3. Pin 3 is the cathode (Unidirectional Only).
4. Dimensions are exclusive of mold flash and metal burrs.

TAPE & REEL ORDERING NOMENCLATURE
1. Surface mount product is taped and reeled in accordance with EIA-481.
2. Suffix-T7 = 7 Inch Reel - 3,000 pieces per 8mm tape, i.e., PSOT05-T7.
3. Suffix-T13 = 13 Inch Reel - 10,000 pieces per 8mm tape, i.e., PSOT05-T13.
4. Suffix - LF = Lead-Free, Pure-Tin Plating, i.e., PSOT05-LF-T7.

Outline & Dimensions: Rev 1 - 11/01, 06012

COPYRIGHT © ProTek Devices 2007

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices
2929 South Fair Lane, Tempe, AZ 85282
Tel: 602-431-8101 Fax: 602-431-2288
E-Mail: sales@protekdevices.com
Web Site: www.protekdevices.com