

## SAC-4P-M12MS/ 1,5-PUR



Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

### ▶ Extract from the online catalog

www.DataSheet4U.com



Sensor/actuator cable, straight male connector M12, 4-pos., cable length: 1.5 m

Order No.	1668043
Ord designation	SAC-4P-M12MS/ 1,5-PUR
EAN	4017918136659
Pack	1 Pcs.
Customs tariff	85445190
Catalog page information	Page 84 (PC-2005)

### ▶ Technical data

**General data**

Nominal current $I_N$	4 A
Rated voltage in acc. with IEC 61076-2-101	250 V
Rated voltage (II/3)	320 V
Number of positions	4
Contact resistance	$\leq 5$ mOhm
Ambient temperature (operation)	-25 ° C ... 90 ° C (Plug)
Ambient temperature (operation)	-30 ° C ... 80 ° C (Cable, fixed installation)
Ambient temperature (operation)	-5 ° C ... 70 ° C (Cable, flexible installation)


www.DataSheet4U.com

**General characteristics**


Fixed cable length	1.5 m
Insulating material	TPU
Material contact surface	Ni/Au
Material contact	CuSn
Degree of protection	IP67
Conductor cross section flexible min.	0.34 mm <sup>2</sup>
Conductor cross section, flexible max.	0.34 mm <sup>2</sup>
Individual wires per module	42
Single wire diameter	0.1 mm
Contact resistance	$\leq 5$ mOhm

### ▶ Drawings

#### Dimensioned drawing

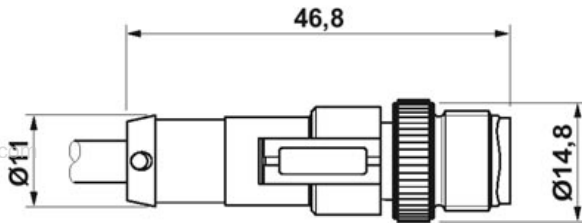

#### Schematic diagram

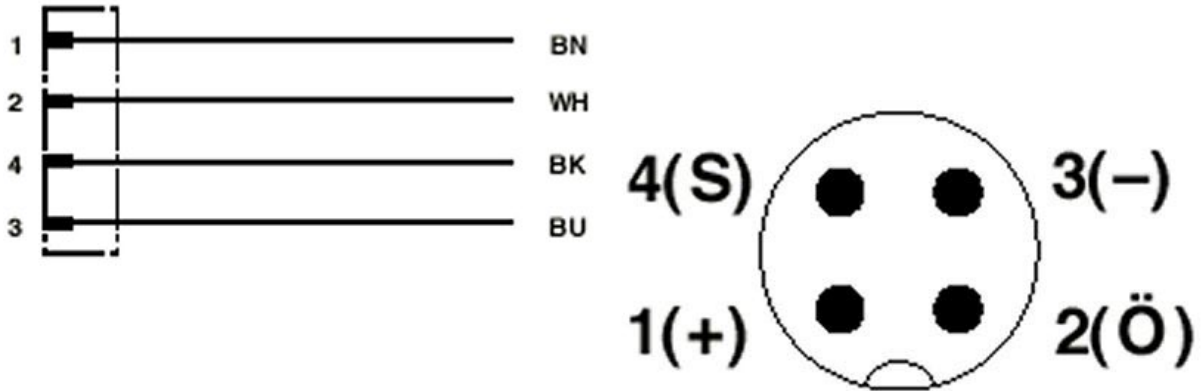



---

► **Address**

---

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057  
USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>  
Phoenix Contact  
Technical modifications reserved;

www.DataSheet4U.com